


LED Konverter: Anschlussschemata LED converter: connection diagrams

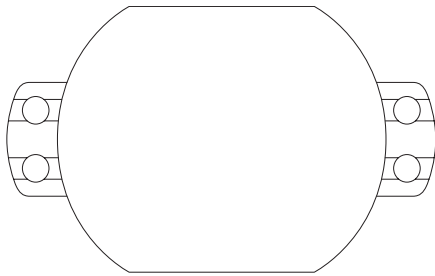

Occhio Konverter

48V DC, 10/26W (Konstantspannungsversorgung),
dimmbar via Phasenabschnittsdimmer

Occhio Converter

48V DC, 10/26W (constant voltage driven),
dimmbare via trailing-edge phase-cut dimmer

Sicherheitshinweise / Montagehinweise

Safety precautions / Mounting information

Die Montage von Elektrokomponenten darf nur von qualifiziertem Fachpersonal durchgeführt werden. Reparaturarbeiten dürfen nur von autorisiertem Fachpersonal oder dem Hersteller durchgeführt werden.



Achtung!

Vor der Montage alle stromführenden Leitungen vom Stromnetz trennen!

Bitte unbedingt folgende Montagehinweise beachten:

- › Jeder LED Strahler ist an einem eigenen LED Konverter zu betreiben.
- › Wird eine Revisionsklappe verwendet, empfiehlt Occhio einen Leitungsquerschnitt von 1,5 mm².
- › Leitungslänge
gedimmt: max. 10 m
ungedimmt max. 100 m
- › Dimmbar via Phasenabschnittdimmer. Liste kompatibler Dimmer siehe Occhio.de/dim
- › Abmessungen: L 105 × B 65 × H 25 mm (passt durch den Deckenausschnitt ø68 mm einer abgehängten Decke vor Einsatz der Hohlraumdose)
- › **Der Konverter muss vor Einsatz der Hohlraumdose durch den Deckenausschnitt geführt werden!**

The assembly and installation of electrical components must be carried out only by qualified personnel. Repairs must be carried out only by authorised, qualified personnel or the manufacturer.



Caution!

Before fitting, disconnect all current-carrying lines from the mains supply.


The following mounting information must be observed:

- › Every LED spotlight is to be operated by its own LED converter.
- › If an inspection flap is used, Occhio recommends a wire cross section of 1.5 mm².
- › cable length:
if the light fixture will be dimmed: max. 10 m
if the light fixture will not be dimmed: max. 100m
- › Dimmable via trailing-edge phase-cut dimmer. List of compatible dimmers see Occhio.de/dim
- › Measurements: L 105 × W 65 × H 25 mm (fit's through ø68mm suspended ceiling cut out before the hollow ceiling box is installed)
- › **The converter must place in position through the ceiling cut-out before the hollow ceiling box is installed!**


Anschlussschemata

Connection diagram

mit Wandeinbauschalter / with flush wall-mounted switch

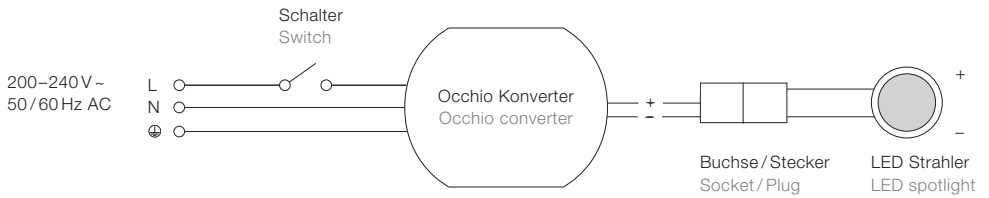

mit Phasenabschnittsdimmer / with trailing-edge phase-cut dimmer

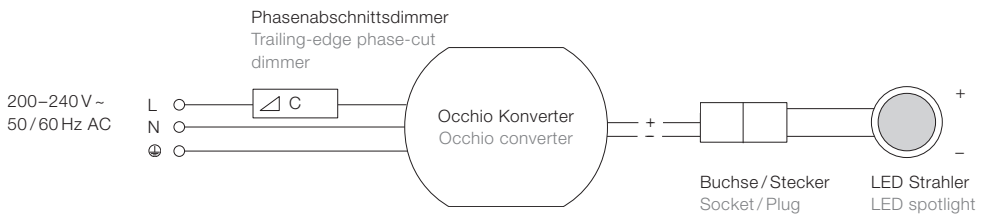

Occhio

Occhio GmbH
Wiener Platz 7
81667 München
Fon +49-89-44 77 86 30
Fax +49-89-44 77 86 39
info@occhio.de
www.occhio.de



010404295639163010