
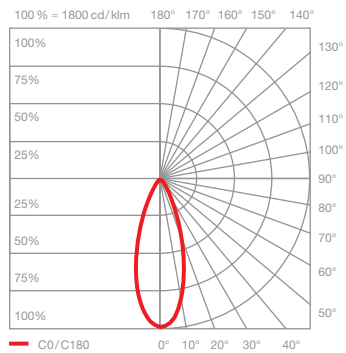


Luna piena up lighting effects

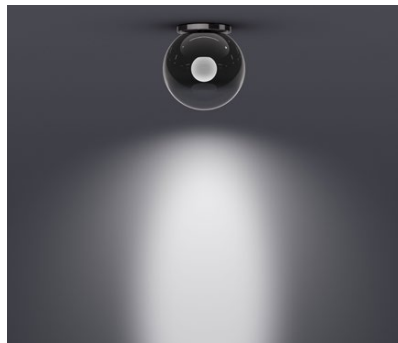

downlight

direct, glare-free downlight (Occhio fireball optic),
beam angle approx. 50°


light source: Occhio fireball

luminous flux : high color 9 W 550 lm


control options

version (»color tune«)


»touchless control« / Occhio air / phase cut dimming (switchable at power supply)

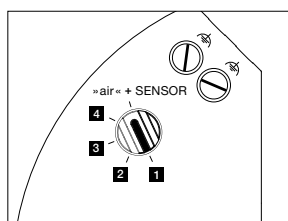


1. sospeso/piena/scura up

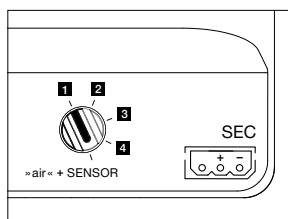

2. sospeso/piena/scura flat/sospeso pure

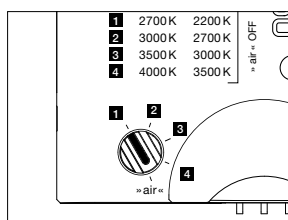


3. parete

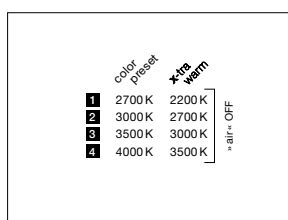

4. Possible, adjustable colour temperatures according to the selected configuration (colour preset or »x-tra warm«). touchless control and Occhio air are deactivated, trailing edge phase-cut dimming possible.

Occhio air powered by Casambi

Luna luminaires can be dimmed via »touchless control« (basso, sogno, sospeso and sospeso cloud) and Occhio air (standard for all Luna luminaires). Alternatively, dimming is possible via trailing edge phase-cut dimmer (Occhio air can be deactivated via power supply, not for basso, sogno and sospeso cloud).

 **Occhio air (standard)**
Bluetooth control via Occhio air app or »air« controller (optional), control of individual luminaires, groups and scenes.

sospeso up (1.)
sospeso flat / pure (2.)

switch position: »air« + SENSOR
»air« + »touchless control« (Bluetooth and gesture control), control via »touchless control« and Occhio air app or »air« controller, switching, dimming, »color tune« (color temperature continuously adjustable), no external dimming possible, control and sensors can be deactivated via Occhio air app

switch position: 1 2 3 4 = »air« OFF
adjustable color temperature according to selected configuration (4 steps, see 4.), trailing-edge phase cut dimming possible, Occhio air deactivated

sospeso cloud

»air« + »touchless control« (Bluetooth and gesture control), control via »touchless control« and Occhio air app or »air« controller, switching, dimming, »color tune« (color temperature continuously adjustable according to selected configuration), no external dimming possible, control and sensors can be deactivated via Occhio air app

basso/sogno

»air« + »touchless control« (Bluetooth and gesture control), control via »touchless control« and Occhio air app or »air« controller, switching, dimming, »color tune« (color temperature continuously adjustable according to selected configuration), control and sensors can be deactivated via Occhio air app

parete (3.)

switch position: »air«
control via Occhio air app or »air« controller, switching, dimming, »color tune« (color temperature continuously adjustable), no external dimming possible

switch position: 1 2 3 4 = »air« OFF
adjustable color temperature according to selected configuration (4 steps, see 4.), trailing-edge phase cut dimming possible, Occhio air deactivated

piena/scura up (1.)
piena/scura flat (2.)

switch position: »air« + SENSOR
»air« (Bluetooth control), control via Occhio air app or »air« controller, switching, dimming, »color tune« (color temperature continuously adjustable), no external dimming possible, no gesture control for piena and scura

switch position: 1 2 3 4 = »air« OFF
adjustable color temperature according to selected configuration (4 steps, see 4.), trailing-edge phase cut dimming possible, Occhio air deactivated