
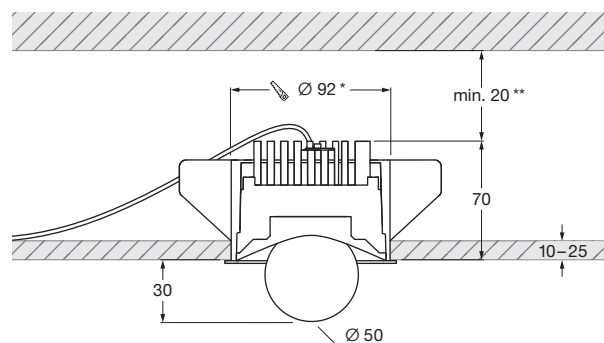


Coro moon piano v edge »air« datasheet

LED recessed downlight with fireball light source (non-tiltable). piano v downlight version for mounting on hollow ceilings. edge model with filigree ceiling edge. The downlight is mounted with a simple tension spring mechanism and requires no screw fittings. Version with remote power supply unit, connection to 230 V AC mains voltage. Switching, dimming and »color tune« via Occhio air. The color temperature can be adjusted continuously between 2700–4000 K (optional 2200–3500 K).

The innovative LED fireball technology creates a special lighting effect - direct light in forward direction and atmospheric illumination by the fireballs indirect light. The fireball as a light source has a light cone of 30°.

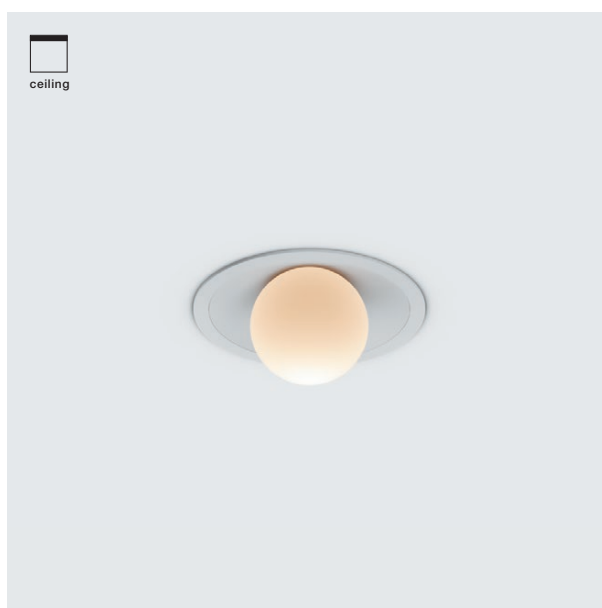

* cut-out dimensions



** minimum thermal distance, installation height depending on driver

dimensions in mm

technical data Coro moon piano v edge »air«

properties	material	aluminium, glass, painted, plastic
	weight	1.1 kg
surface	tube	matt white, matt black
Occhio »color tune« LED	average life time	> 50.000 hrs
	energy efficiency class	This product contains a light source of energy efficiency class F (2200–3500K) or E (2700–4000K)
	power	LED 9 W (incl. Occhio power supply unit approx. 12 W, standby < 0.5 W)
	color rendering index	CRI Ra 92
	color temperature (color consistency)	color tune: 2200–3500 K (2-step) 2700–4000 K (2-step)
electricity	dimming	via Occhio air
	connection	230 V AC
	permitted operating conditions	ambient temperature 10–30°C, for indoor use only

Coro moon piano v edge »air« lighting effects

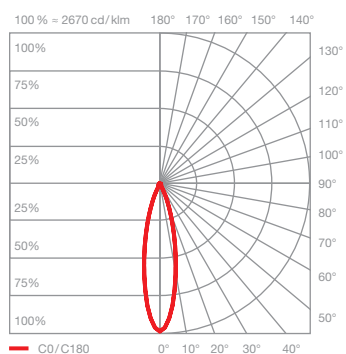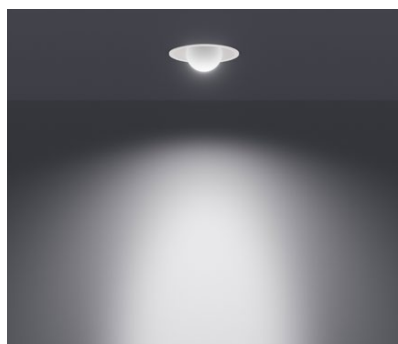

moon

direct, glare-free light,
beam angle approx. 30°

optics: Occhio fireball

power: high color 9 W

luminous flux: 2200–3500 K 510–660 lm
2700–4000 K 580–710 lm