
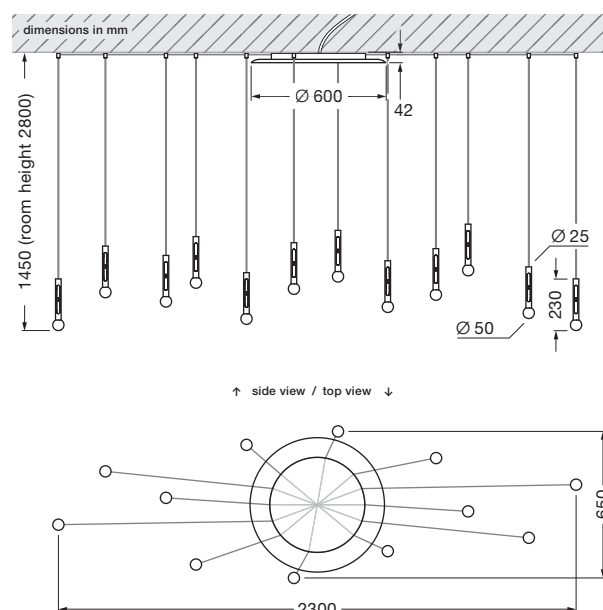


Coro moon spider 12 »air« datasheet

LED suspended luminaire spider cloud with 12 rod-shaped heads with fireball light source and round canopy. spider cloud version for surface mounting. Coro spider configurations planned for perfect positioning above a dinner table. Table height 0.75 m, room height 2,80 m–3,20 m, table length 2,80 m–3,00 m. Ensemble can be personalized by individual positions for cable redirections and set of cables.


Version with integrated power supply unit, connection to 230 V AC mains voltage. Switching, dimming and »color tune« via Occhio air or »touchless control« (gesture control on head). All heads are synchronized (no individual head control). The color temperature can be adjusted continuously between 2700–4000 K (optional 2200–3500 K). The zoom optic is glare-free and the beam angle continuously adjustable between 40–80°.

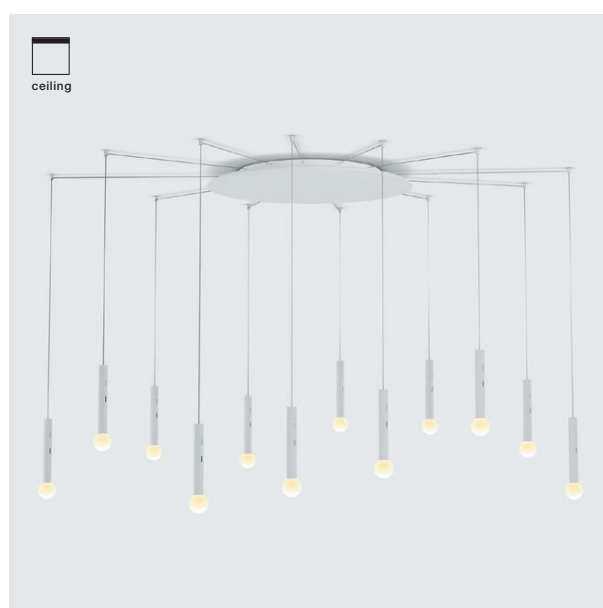

technical data Coro moon spider 12 »air«

properties	material	aluminium, glass, PVD coated, painted, plastic
	cable length / arrangement	1450 mm (room height 2,8 m) / arrangement height adjustable by $\pm$ 400 mm
	weight	9.2 kg
surface	head	gold, matt gold, rose gold polished, matt silver, matt white, matt black, phantom polished, black phantom polished, dark chrome polished
	pads / cover	matt white, matt black
	cable	white, black
	canopy	matt white, matt black
Occhio »color tune« LED	average life time	> 50.000 hrs
	energy efficiency class	This product contains a light source of energy efficiency class F (2200–3500K) or E (2700–4000K)
	power	LED 12 x 6 W (incl. Occhio power supply unit approx. 97 W, standby < 0.5 W)
	color rendering index	CRI Ra 92
	color temperature (color consistency)	color tune: 2200–3500 K (2-step) 2700–4000 K (2-step)
electricity	dimming	via »touchless control« and Occhio air
	connection	230 V AC
	permitted operating conditions	ambient temperature 10–30°C, for indoor use only

Coro moon spider 12 »air« lighting effects

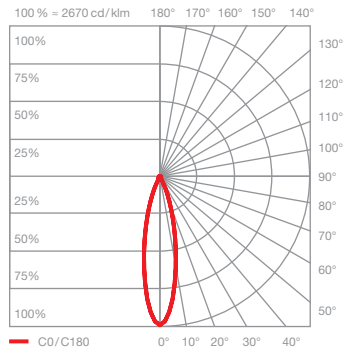

moon

direct, glare-free light,
beam angle approx. 30°

optics: Occhio fireball

power: high color 12 x 6 W

luminous flux: 2200–3500 K 12 x 340–440 lm
2700–4000 K 12 x 390–470 lm