


Coro moon vivo flat phase cut datasheet

LED ceiling downlight with fireball light source (non-tiltable) and mirror disc. flat version for mounting on hollow ceilings. Version with remote power supply unit, connection to 230VAC mains voltage.

Dimmable via phase-cut dimmer. The color temperature can be configured to 2700 K, 3000 K or 4000 K when ordering. The innovative LED fireball technology creates a special lighting effect - direct light in forward direction and atmospheric illumination by the fireballs indirect light. The fireball as a light source has a light cone of 30°.

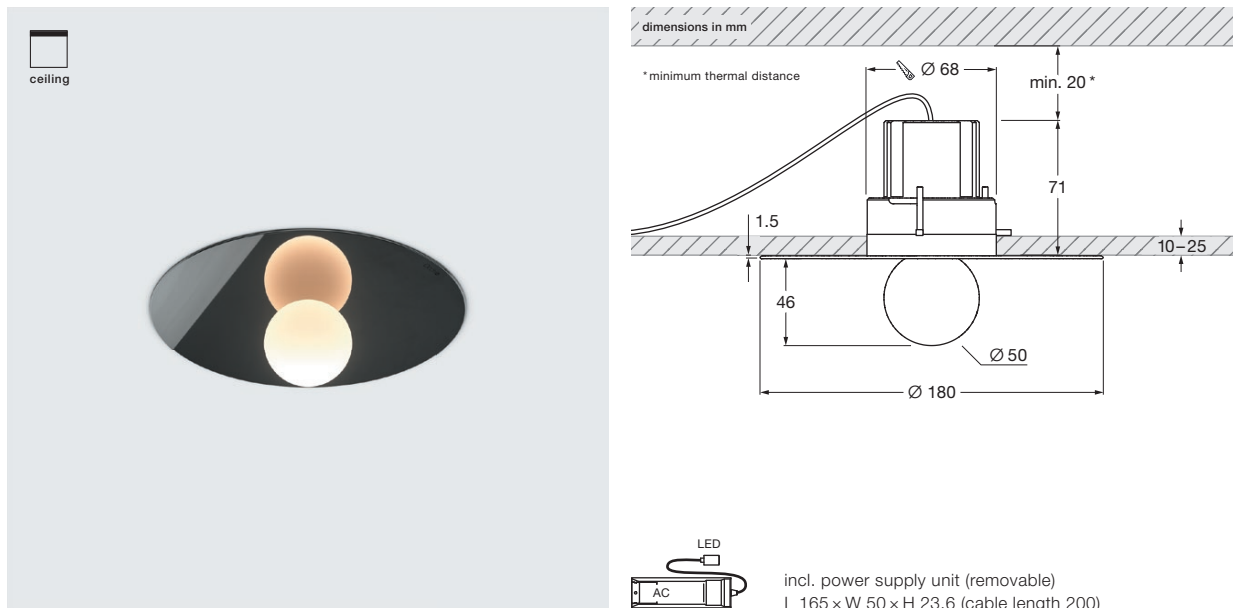


technical data Coro moon vivo flat phase cut

properties	material	aluminium, glass, PVD coated, painted, plastic
	weight	1 kg
surface	mirror disc	soft bronze, dark chrome polished, phantom
Occhio LED	average life time	> 50.000 hrs
	energy efficiency class	This product contains a light source of energy efficiency class F (2700 K, 3000 K) or E (4000 K)
	power	LED 9 W (incl. Occhio power supply unit approx. 12 W, standby < 0.5 W)
	color rendering index	CRI Ra 92
	color temperature (color consistency)	2700 K / 3000 K / 4000 K (2-step)
electricity	dimming	via phase cut dimmer*
	connection	230 V AC
	permitted operating conditions	ambient temperature 10–30°C, for indoor use only

* dimmer not included in the scope of delivery, for a list of compatible dimmers, see www.occhio.com/dim_en

Coro moon vivo flat phase cut lighting effects

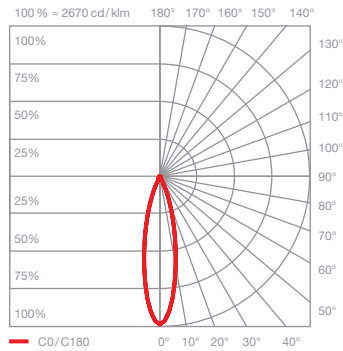

moon

direct, glare-free light,
beam angle approx. 30°

optics: Occhio fireball

power: high color 9W

luminous flux: 2700 K 670lm
3000 K 720lm
4000 K 820lm