


## Coro moon zero v »air« datasheet

LED recessed downlight with fireball light source (non-tiltable). zero v downlight version for flush mounting in hollow ceilings with revision. The downlight is mounted with a separate mounting sleeve. Version with remote power supply unit, connection to 230 VAC mains voltage. Switching, dimming and »color tune« via Occhio air. The color temperature can be adjusted continuously between 2700–4000 K (optional 2200–3500 K).


The innovative LED fireball technology creates a special lighting effect - direct light in forward direction and atmospheric illumination by the fireballs indirect light. The fireball as a light source has a light cone of 30°.

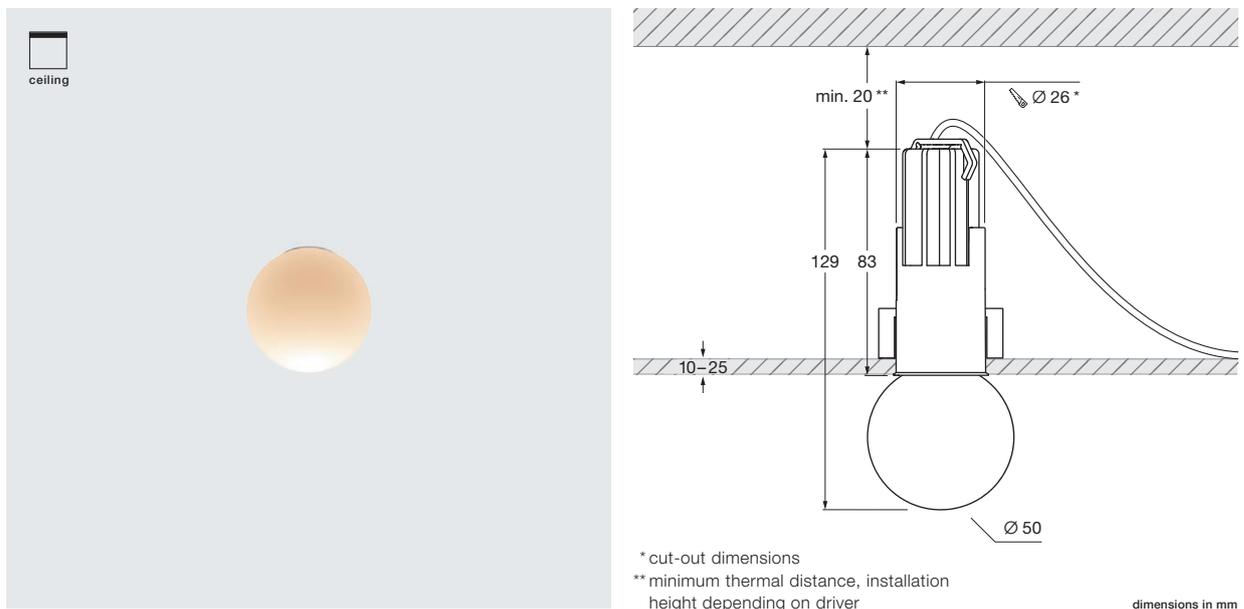

### technical data Coro moon zero v »air«

properties	material	aluminium, glass, painted, plastic
	weight	0.6 kg
surface	holding ring	white, black
	Occhio »color tune« LED	
Occhio »color tune« LED	average life time	> 50.000 hrs
	energy efficiency class	This product contains a light source of energy efficiency class F (2200–3500K) or E (2700–4000K)
	power	LED 7 W (incl. Occhio power supply unit approx. 9 W, standby < 0.5 W)
	color rendering index	CRI Ra 92
electricity	color temperature (color consistency)	color tune: 2200–3500 K (2-step)      2700–4000 K (2-step)
	dimming	via Occhio air
electricity	connection	230 VAC
	permitted operating conditions	ambient temperature 10–30°C, for indoor use only

## Coro moon zero v »air« lighting effects

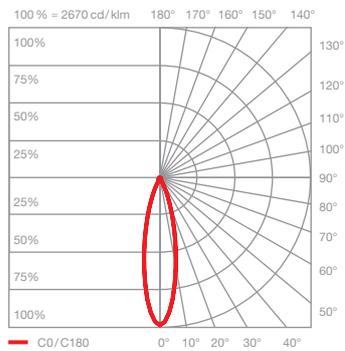

### moon

direct, glare-free light,  
beam angle approx. 30°

optics: Occhio fireball

power: high color 7 W

luminous flux: 2200–3500 K 420–550 lm  
2700–4000 K 480–590 lm