


Coro moon zero v pro datasheet



LED recessed spotlight with fireball light source (downlight non-tiltable) for hollow ceilings with revision. zero model for flush mounting. The spotlight is mounted with a separate mounting sleeve. Version with remote power supply unit, connection to external constant current power source (driver). Dimmable via customer-supplied dimmable power supply unit. The innovative LED fireball technology creates a special lighting effect - direct, downward-facing light and atmospheric illumination by the fireballs indirect light. The fireball as a light source has a light cone of 30°.

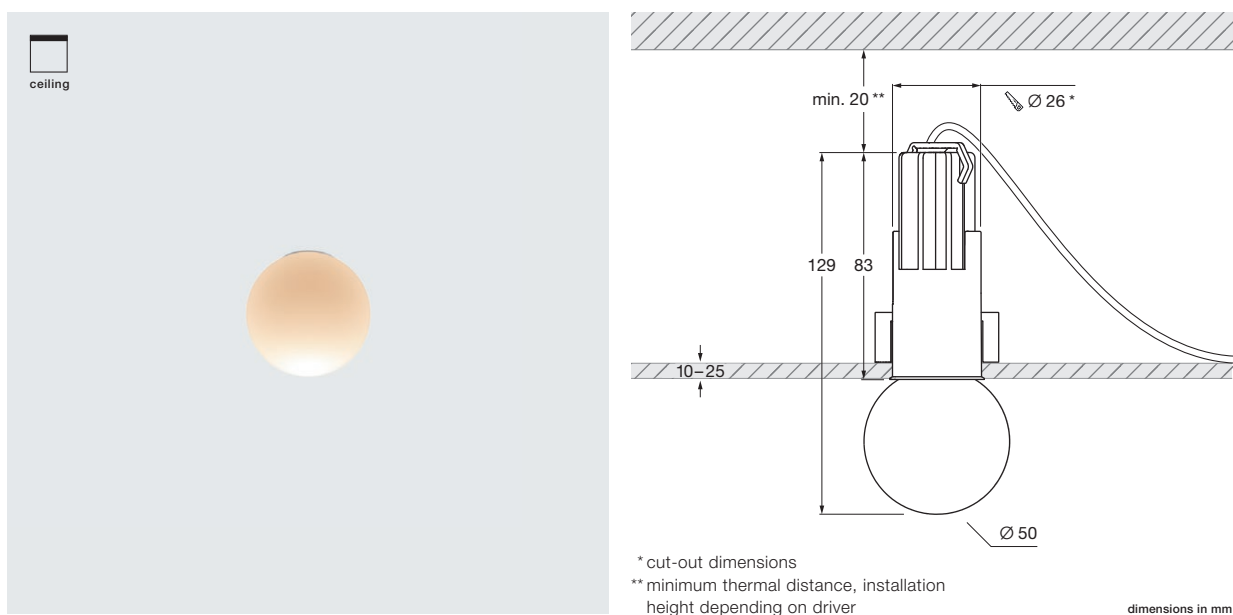

technical data Coro moon zero v pro

properties	material	aluminium, glass, painted, plastic
	weight	0.3 kg
surface	holding ring	white, black
Occhio LED	average life time	> 50.000 hrs
	energy efficiency class (luminous efficiency)	F (106 lm / W, @4000 K single color)
	power	LED 7 W
	color rendering index	CRI Ra 92
	color temperature (color consistency)	single color: 2700 K, 3000 K, 4000 K (2-step) color tune: 2200-3500 K (2-step) 2700-4000 K (2-step)
electricity	dimming	with suitable power supply unit
	connection	single color (1-channel): max. 390 mA / 18 VDC color tune (2-channel): max. 780 mA total current ($I_1 + I_2$) / 9 VDC per channel
	permitted operating conditions	ambient temperature 10-30°C, for indoor use only

Coro moon zero v pro
lighting effects

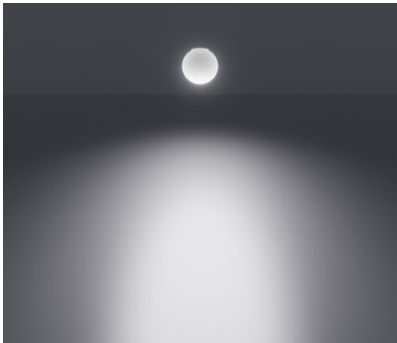

moon

direct, glare-free light,
beam angle approx. 30°

optics: Occhio fireball

power: high color 7 W

luminous flux: 2700 K 560 lm
3000 K 600 lm
4000 K 680 lm
2200–3500 K 420–550 lm
2700–4000 K 480–590 lm