
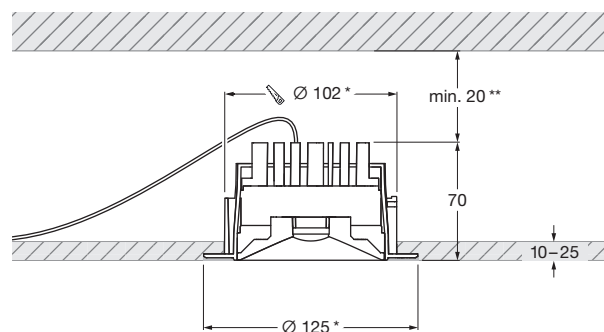


## Coro piano v pure »air« datasheet

LED recessed downlight with fixed lens optic (non-tiltable). piano v downlight version for mounting on hollow ceilings. pure model for frameless installation. The downlight is mounted with a separate plaster ring.

Version with remote power supply unit, connection to 230 VAC mains voltage. Switching, dimming and »color tune« via Occhio air. The color temperature can be adjusted continuously between 2700–4000 K (optional 2200–3500 K). The fixed lens optic has a light cone of 60°.

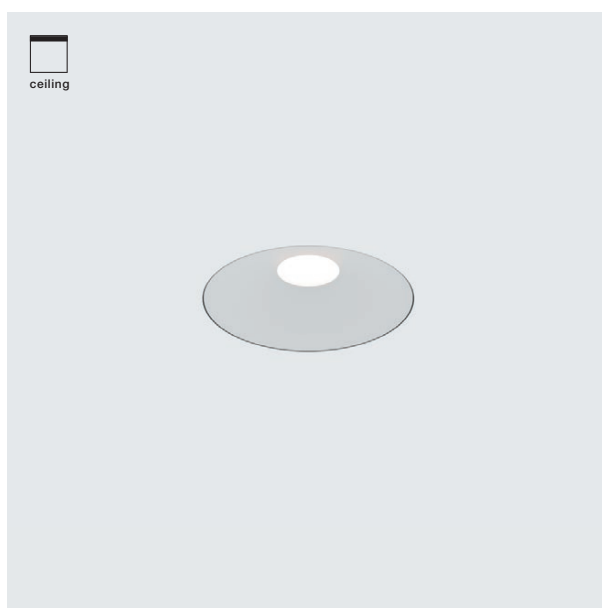

\* cut-out and surrounding fold required for mounting; matching step grinder optionally available



\*\* minimum thermal distance, installation height depending on driver

dimensions in mm

### technical data Coro piano v pure »air«

|                         |                                       |  |
|-------------------------|---------------------------------------|--|
| properties              | material                              | aluminium, glass, painted, plastic   |
|                         | weight                                | 0.8 kg   |
| surface                 | tube                                  | matt white, matt black   |
| Occhio »color tune« LED | average life time                     | > 50.000 hrs   |
|                         | energy efficiency class               | This product contains a light source of energy efficiency class F (2200–3500K) or E (2700–4000K) |
|                         | power                                 | LED 9 W (incl. Occhio power supply unit approx. 12 W, standby < 0.5 W)                           |
|                         | color rendering index                 | CRI Ra 92  |
|                         | color temperature (color consistency) | color tune: 2200–3500 K (2-step)      2700–4000 K (2-step)                                       |
| electricity             | dimming                               | via Occhio air   |
|                         | connection                            | 230 V AC   |
|                         | permitted operating conditions        | ambient temperature 10–30°C, for indoor use only   |

## Coro piano v pure »air« lighting effects

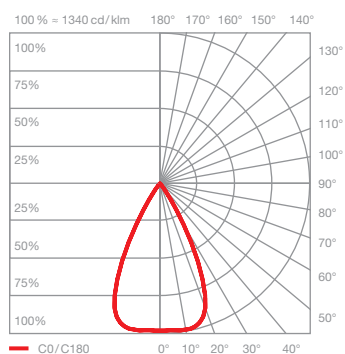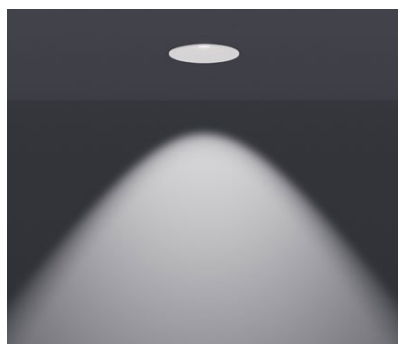

### lens

direct light, beam angle approx. 60°

optics: lens

power: high color 9 W

luminous flux: 2200–3500 K 310–410 lm  
2700–4000 K 360–430 lm