


Coro sospeso fix flat pro datasheet

LED suspended luminaire with rod-shaped head and zoom optics. Version with flat base for installation on hollow ceilings or ceiling sockets. Version with remote power supply unit, connection to external constant current power source (driver). Dimmable via customer-supplied dimmable power supply unit. The zoom optics are glare-free and continuously adjustable within 40–80°.

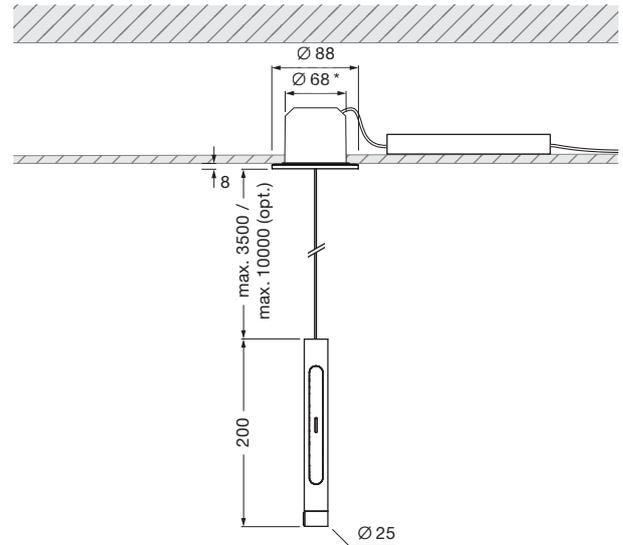


* cut-out dimensions

dimensions in mm

technical data Coro sospeso fix flat pro



properties	material	aluminium, glass, PVD coated, painted, plastic
	height setting	max. 3500 mm (can be adjusted during fitting)
	weight	0.4 kg
surface	head / zoom	bronze, matt gold, rose gold, matt silver, matt white, matt black, phantom, black phantom
	pads / cover	matt white, matt black
	cable	white, black
Occhio LED	average life time	> 50.000 hrs
	energy efficiency class (luminous efficiency)	G (58 lm / W, @4000 K single color)
	power	LED 6W
	color rendering index	CRI Ra 92
	color temperature (color consistency)	single color: 2700K, 3000K, 4000K (2-step) color tune: 2200–3500K (2-step) 2700–4000K (2-step)
electricity	dimming	with suitable power supply unit
	connection	single color (1-channel): max. 500 mA / 12 VDC color tune (2-channel): max. 1000 mA total current (I ₁ + I ₂) / 6 VDC per channel
	permitted operating conditions	ambient temperature 10–30°C, for indoor use only

Coro sospeso fix flat pro lighting effects

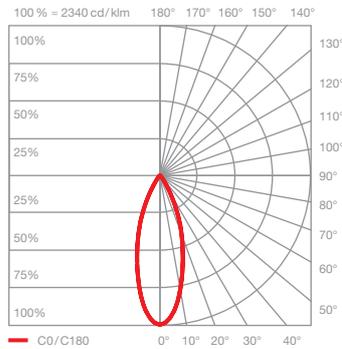

Z40
directed light (approx. 40°)

optics:	zoom lens	
power:	high color	6W
luminous flux:	2700 K	170lm
	3000 K	180lm
	4000 K	210lm
	2200–3500 K	130–170lm
	2700–4000 K	150–180lm

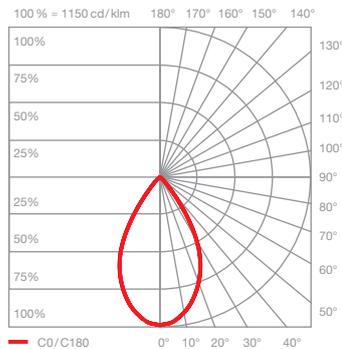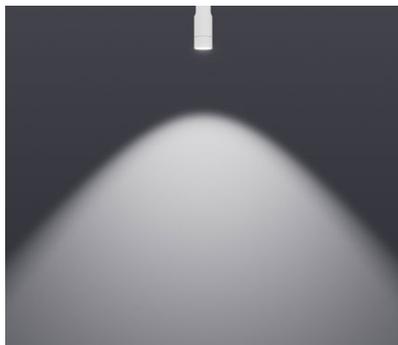

Z80
directed light (approx. 80°)

optics:	zoom lens	
power:	high color	6W
luminous flux:	2700 K	270lm
	3000 K	280lm
	4000 K	320lm
	2200–3500 K	200–260lm
	2700–4000 K	230–280lm