


## Coro sospeso var up »air« datasheet

LED suspended luminaire with rod-shaped head and zoom optic. up version for surface mounting. The suspension cable is continuously adjustable between 50–200 cm.

Version with integrated power supply unit, connection to 230 V AC mains voltage. Switching, dimming and »color tune« via Occhio air or »touchless control« (gesture control on head). The color temperature can be adjusted continuously between 2700–4000 K (optional 2200–3500 K). The zoom optic is glare-free and the beam angle continuously adjustable between 40–80°.


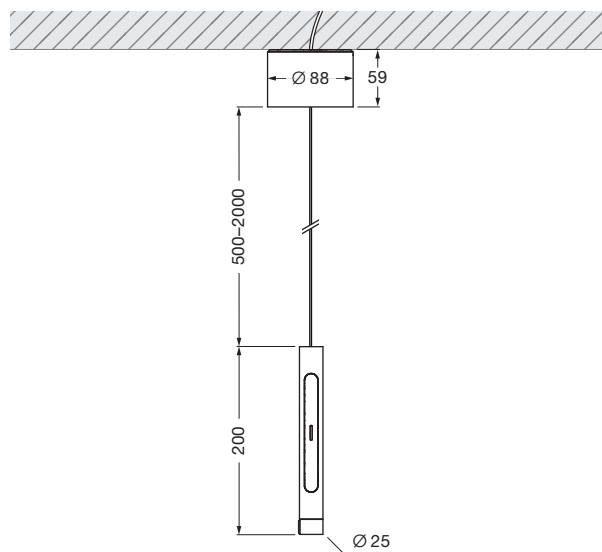


dimensions in mm

### technical data Coro sospeso var up »air«

properties	material	aluminium, glass, PVD coated, painted, plastic
	height adjustment	500–2000 mm (variable)
	weight	0.6 kg
surface	head / zoom	gold, matt gold, rose gold polished, matt silver, matt white, matt black, phantom polished, black phantom polished, dark chrome polished
	pads / cover	matt white, matt black
	cable	transparent
Occhio »color tune« LED	average life time	> 50.000 hrs
	energy efficiency class	This product contains a light source of energy efficiency class F (2200–3500K) or E (2700–4000K)
	power	LED 6W (incl. Occhio power supply unit approx. 8W, standby < 0.5W)
	color rendering index	CRI Ra 92
	color temperature (color consistency)	color tune: 2200–3500 K (2-step)      2700–4000 K (2-step)
electricity	dimming	via »touchless control« and Occhio air
	connection	230 V AC
	permitted operating conditions	ambient temperature 10–30°C, for indoor use only

## Coro sospeso var up »air« lighting effects

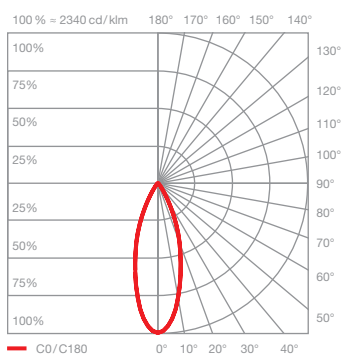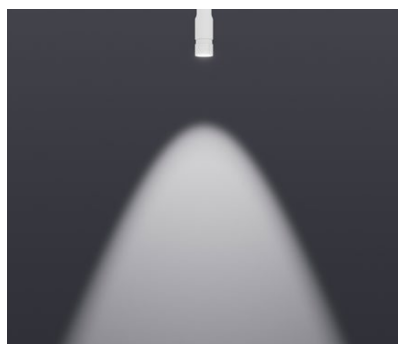


### Z40

directed light (approx. 40°)

optics: zoom lens

power: high color 6 W

luminous flux: 2200–3500 K 130–170 lm  
2700–4000 K 150–180 lm

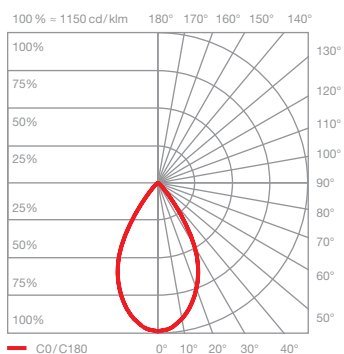

### Z80

directed light (approx. 80°)

optics: zoom lens

power: high color 6 W

luminous flux: 2200–3500 K 200–260 lm  
2700–4000 K 230–280 lm