


## Luna parete cover pro datasheet

LED wall luminaire with spherical head and directed light aimed upwards and a glass sphere diameter of 125 mm. The innovative LED fireball technology creates a special lighting effect – direct, upward-facing and atmospheric lights of the fireball within the glass sphere.



Version with iris shutter for installation on 68 mm wall sockets. Glass cover and fireball removable for maintenance purposes, LED interchangeable. The color temperature can be selected upon purchase (2700 K / 3000 K / 4000 K).

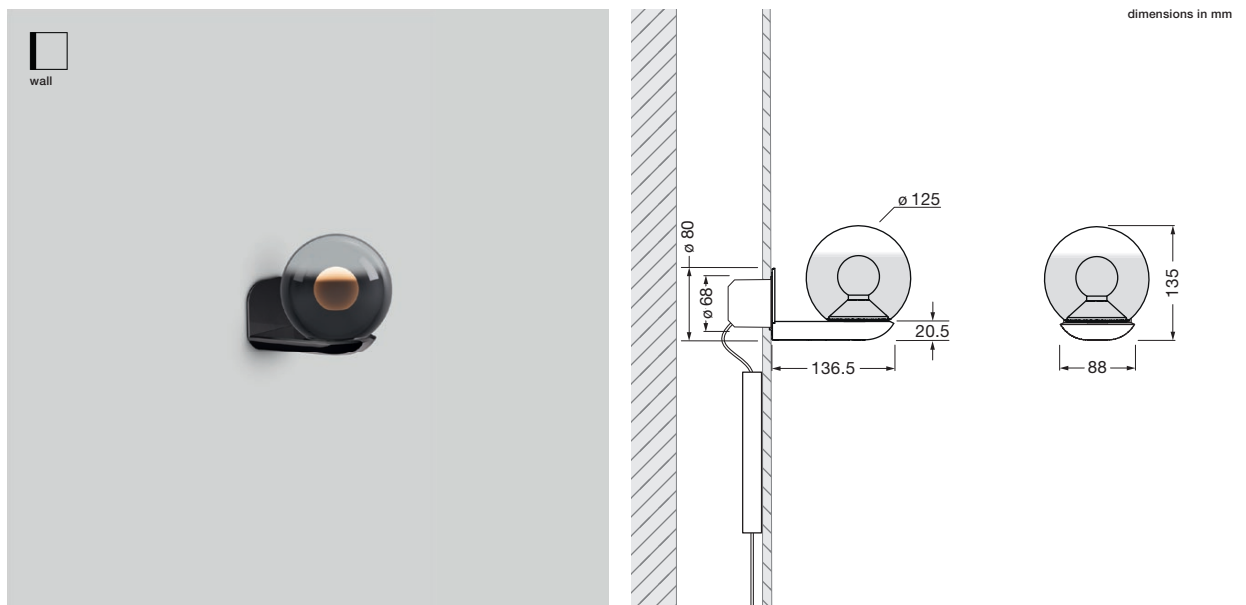

### technical data Luna parete cover pro

properties	material	aluminium, glass, PVD coated, steel, plastic
	weight	0.9 kg
surface	head / body / base	dark chrome, phantom
Occhio »color tune« LED	average life time	> 50.000 hrs
	energy efficiency class (luminous efficiency)	G (65 lm/W)
	power	LED 9 W
	color rendering index	CRI Ra 95
	color temperature (color consistency)	2700 / 3000 / 4000 K (2-step)
electricity	dimming	with suitable power supply unit
	connection	1 x 500 mA konst. / 18–24 V DC
	permitted operating conditions	max. 30°C for indoor use only

## Luna parete cover pro lighting effects

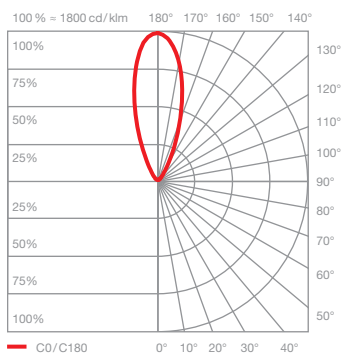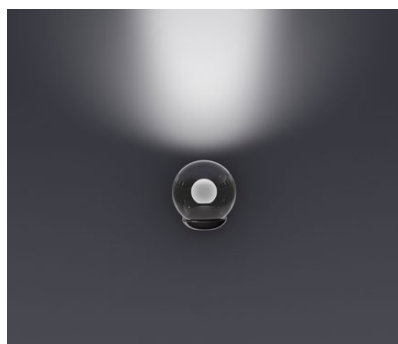

### uplight

direct, glare-free uplight (Occhio fireball optic),  
beam angle approx. 50°

light source:

Occhio fireball

luminous flux :	4000 K	9 W	630 lm
	3000 K	9 W	550 lm
	2700 K	9 W	520 lm