


Luna parete pro datasheet

LED wall luminaire with spherical head and directed light aimed upwards and a glass sphere diameter of 125 mm. The innovative LED fireball technology creates a special lighting effect – direct, upward-facing and atmospheric lights of the fireball within the glass sphere.



Version for surface mounting. Glass cover and fireball removable for maintenance purposes, LED interchangeable. The color temperature can be selected upon purchase (2700 K/3000 K/4000 K).

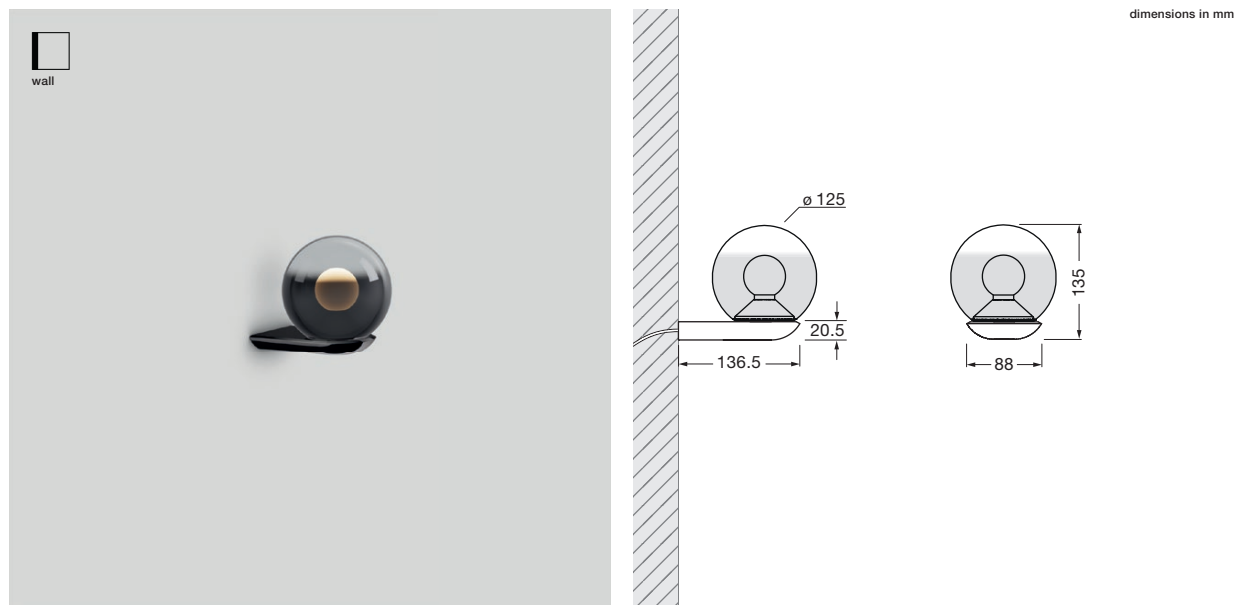

technical data Luna parete pro

properties	material	aluminium, glass, PVD coated, steel, plastic
	weight	0.8 kg
surface	head / body / base	dark chrome, phantom
Occhio »color tune« LED	average life time	> 50.000 hrs
	energy efficiency class (luminous efficiency)	G (65 lm/W)
	power	LED 9 W
	color rendering index	CRI Ra 95
	color temperature (color consistency)	2700 / 3000 / 4000 K (2-step)
electricity	dimming	via trailing-edge phasecut dimmer *
	connection	1 x 500 mA konst. / 18–24 V DC
	permitted operating conditions	max. 30°C for indoor use only

Luna parete pro
lighting effects

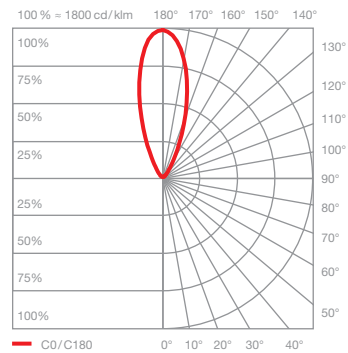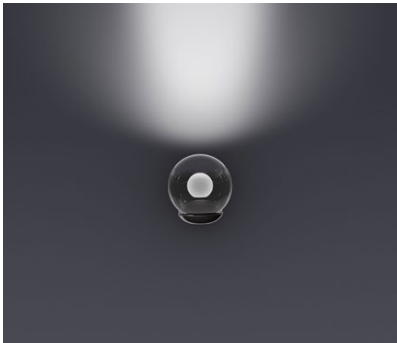

uplight			
direct, glare-free uplight (Occhio fireball optic), beam angle approx. 50°			
light source:		Occhio fireball	
luminous flux :	4000 K	9 W	630 lm
	3000 K	9 W	550 lm
	2700 K	9 W	520 lm