


Luna scura flat pro datasheet

LED wall luminaire with spherical head and indirect light aimed towards the wall. With optional glass sphere diameters of 125/160/200 mm. The innovative LED fireball technology creates a special lighting effect – indirect light towards the wall and atmospheric lights of the fireball within the glass sphere.



Version with flat base for installation on hollow space walls or wall socket. Glass cover and fireball removable for maintenance purposes, LED interchangeable. The color temperature can be selected upon purchase (2700 K/3000 K/4000 K).

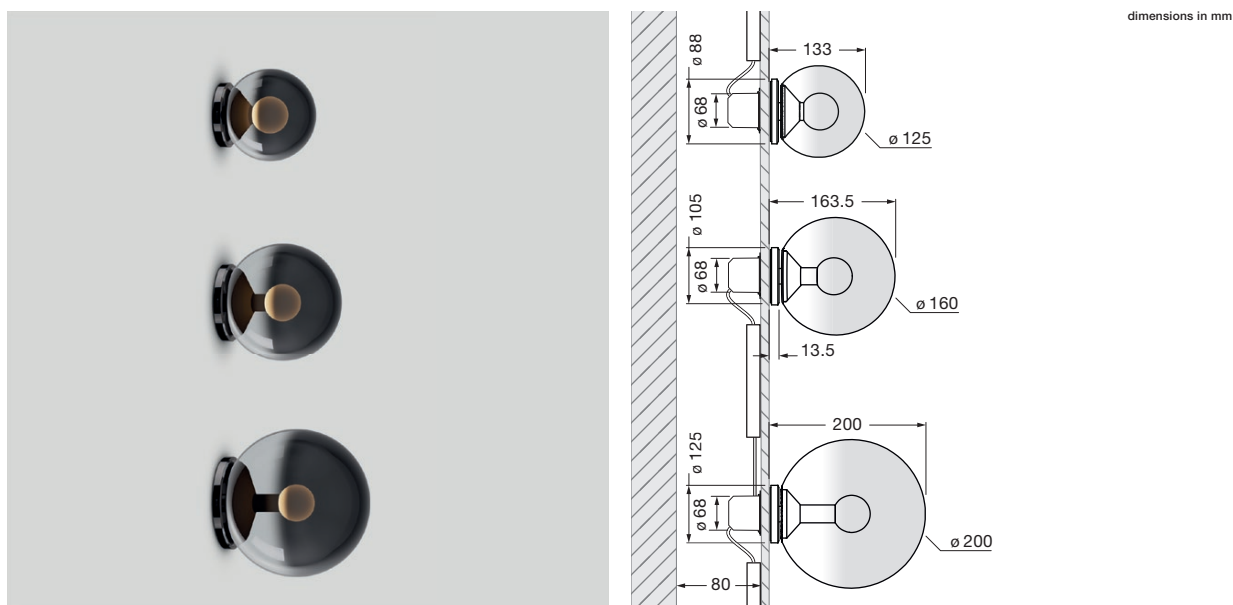

technical data Luna scura flat pro

properties	material	aluminium, glass, PVD coated, steel, plastic
	weight	125 = 0.6 kg / 160 = 0.8 kg / 200 = 1.0 kg
surface	head / body / base	dark chrome, phantom
Occhio »color tune« LED	average life time	> 50.000 hrs
	energy efficiency class (luminous efficiency)	G (24 lm/W)
	power	LED 9 W
	color rendering index	CRI Ra 95
	color temperature (color consistency)	2700 / 3000 / 4000 K (2-step)
electricity	dimming	via trailing-edge phasecut dimmer
	connection	1 x 500 mA konst. / 18–24 V DC
	permitted operating conditions	max. 30°C for indoor use only

Luna scura flat pro
lighting effects

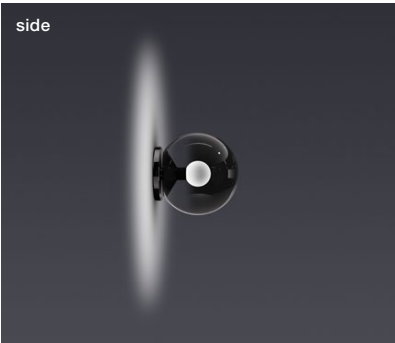

backlight
indirect, glare-free backlight (Occhio fireball optic)

light source: Occhio fireball

luminous flux :	4000 K	9 W	230 lm
	3000 K	9 W	200 lm
	2700 K	9 W	190 lm

