


## Luna sospeso fix flat pro datasheet

LED suspended luminaire with spherical head and directed light aimed downwards. With optional glass sphere diameters of 125/160/200 mm. The maximum pendulum length is 3500 mm (adjustable during mounting). The innovative LED fireball technology creates a special lighting effect – direct, downward-facing and atmospheric lights of the fireball within the glass sphere.

Version with flat base for installation on hollow space ceilings or ceiling socket. Head, glass cover and fireball removable for maintenance purposes, LED interchangeable. The color temperature can be selected upon purchase (2700 K/3000 K/4000 K).

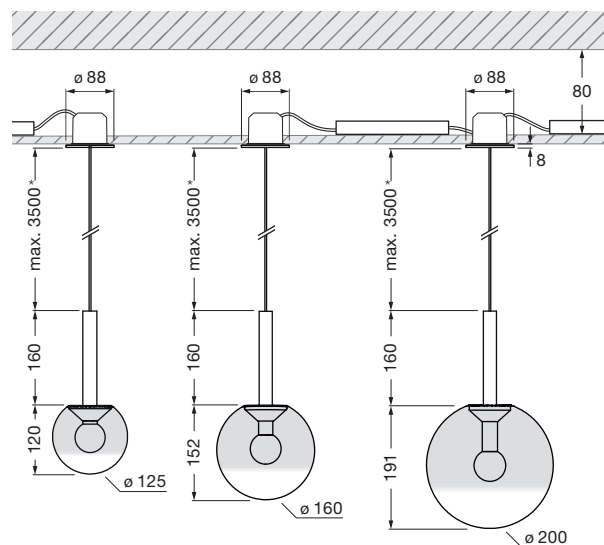


custom length 10000 mm possible

dimensions in mm

### technical data Luna sospeso fix flat pro

properties	material	aluminium, glass, PVD coated, steel, plastic
	height adjustment	max. 3500 mm (selectable during assembly), custom length of max. 10000 mm possible
	weight	125 = 0.9 kg / 160 = 1.0 kg / 200 = 1.1 kg
surface	head / body / base	dark chrome, phantom
	cable	black fabric cable
Occhio »color tune« LED	average life time	> 50.000 hrs
	energy efficiency class (luminous efficiency)	G (65 lm/W)
	power	LED 9 W
	color rendering index	CRI Ra 95
	color temperature (color consistency)	2700 / 3000 / 4000 K (2-step)
electricity	dimming	via trailing-edge phasecut dimmer*
	connection	1 x 500 mA konst. / 18–24 V DC
	permitted operating conditions	max. 30°C for indoor use only

Luna sospeso fix flat pro  
lighting effects



**downlight**  
direct, glare-free downlight (Occhio fireball optic),  
beam angle approx. 50°

light source:	Occhio fireball		
luminous flux :	4000 K	9 W	630 lm
	3000 K	9 W	550 lm
	2700 K	9 W	520 lm