


Lunanova 140  
datasheet

Luna chandelier in three different sizes with up to 43 heads. Dark chrome mirrored Luna glass spheres in sizes 125 / 160 / 200 mm are concentrically arranged on a mirrored disc. Lunanova for near-ceiling version and Lunanova alta for fully suspended version. The innovative LED Fireball technology produces a special lighting effect – direct, downward-facing, directional light as well as an atmospheric glow of the fireball within the glass sphere. Controllable via Occhio air, »circular fading« ensures unique, magical lighting effects.

Version with integrated ballasts for surface mounting, connection to 230 V AC mains voltage. Head, glass shade and Fireball can be removed for maintenance. The ballast can be accessed via a hydraulic lowering mechanism. The color temperature is continuously adjustable via Occhio air from 2700–4000 K (optional 2200–3500 K).

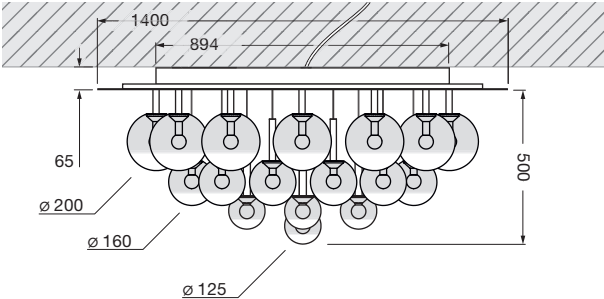


incl. power supply unit (removable) dimensions in mm

| technical data Lunanova 140 |                                       |                                                                                                  |
|-----------------------------|---------------------------------------|--------------------------------------------------------------------------------------------------|
| properties                  | material                              | steel, stainless steel, aluminium, glass, PVD-coated, plastic                                    |
|                             | weight                                | 94 kg *                                                                                          |
| surface                     | head / body / canopy                  | dark chrome                                                                                      |
|                             | cable                                 | black fabric cable                                                                               |
| Occhio »color tune« LED     | average life time                     | > 50.000 hrs                                                                                     |
|                             | energy efficiency class               | This product contains a light source of energy efficiency class F (2200–3500K) or E (2700–4000K) |
|                             | power                                 | LED 31 x 9 W (incl. Occhio power supply unit total 370 W, standby < 0.5 W)                       |
|                             | color rendering index                 | CRI Ra 92                                                                                        |
|                             | color temperature (color consistency) | 2700–4000 K (2-step) <span style="float: right;">2200–3500 K (2-step)</span>                     |
| electricity                 | dimming                               | Occhio air                                                                                       |
|                             | connection                            | 230 V AC                                                                                         |
|                             | permitted operating conditions        | max. 30°C for indoor use only                                                                    |

\* The supporting construction, suspension device and mounting materials (e.g. dowels, threaded rods, etc.) must be used that are appropriate for the ceiling type and have sufficient load-bearing capacity (e.g. in accordance with DIN EN 60598-1, five times the mass of the luminaires attached to them without deformation).

## Lunanova 140 lighting effects

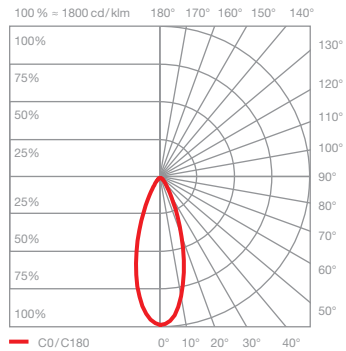

### downlight

direct, glare-free downlight  
(Occhio fireball optic), beam angle approx. 50°

light source: Occhio fireball

luminous flux : high color 31 x 9 W 550 lm