


Mito alto 40 flat pro  
datasheet



Linear LED ceiling luminaire with single-sided light emission and a length of 36.5 cm. There are two lighting effects to choose from: narrow — tightly concentrated, glare-free light to ensure perfect illumination for every use and the lighting effect wide — expansive light for diffuse brightening of rooms and surfaces.

Version for hollow ceilings incl. power supply unit, cover and inlay (access panel to the power supply unit on the appropriate place required). The color temperature can be selected at the time of purchase (2700 K / 3000 K / 4000 K).

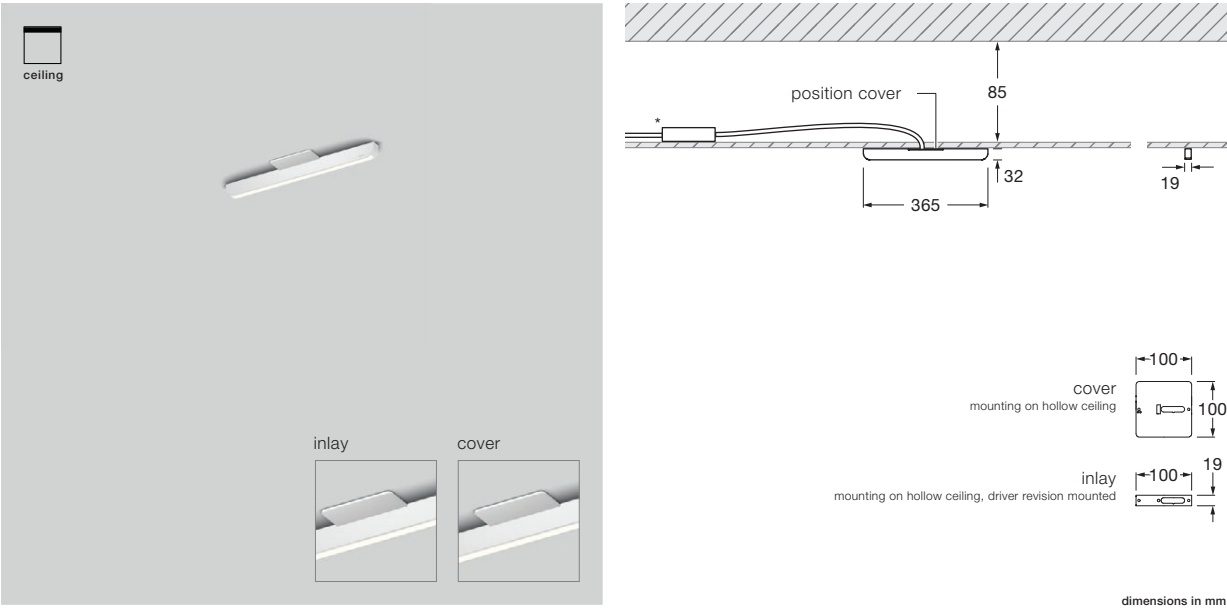

technical data Mito alto 40 flat pro		
properties	material	head aluminium, painted, PVD-coated steel, optical plastic
	weight	cover painted plastic 0.8 kg
surface	head	bronze, matt gold, rose gold, matt silver, matt white, matt black, phantom, black phantom
	cover	matt white, matt silver, matt black
Occhio LED	average life time	> 50.000 hrs
	energy efficiency class (luminous efficiency)	G (58 lm / W)
	power	LED 15 W
	color rendering index	high color; CRI Ra 95
	color temperature	2700–4000 K
electricity	dimming	with suitable power supply unit
	connection	max. 550 mA const. / > 32 V DC
	permitted operating conditions	max. 30°C for indoor use only

## Mito alto 40 flat pro lighting effects

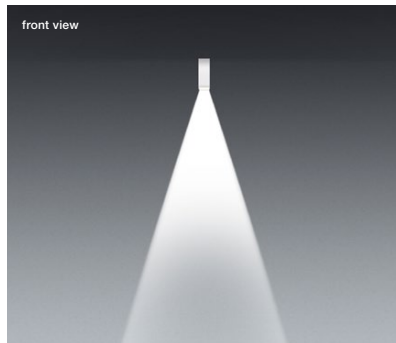

### ceiling (narrow)

concentrated light, beam angle approx. 25°

inserts:

narrow





luminous flux:

high color

15 W

800 lm

UGR (4H8H) < 19\*

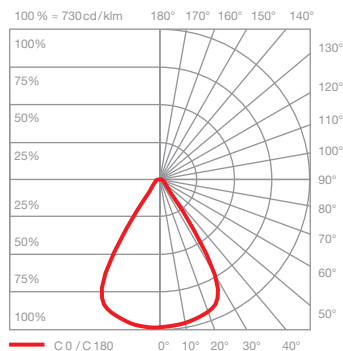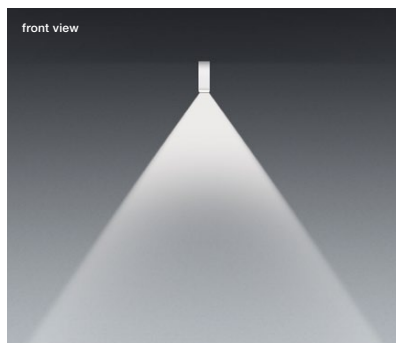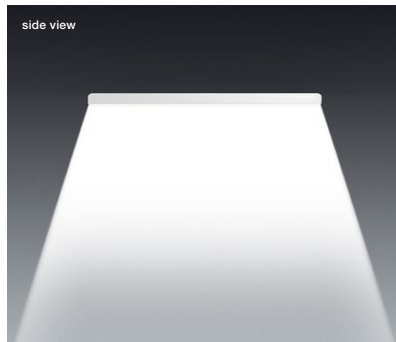

### ceiling (wide)

wide-radiation light, beam angle approx. 80°

inserts:

wide



luminous flux:

high color

15 W

800 lm

UGR (4H8H) > 19\*

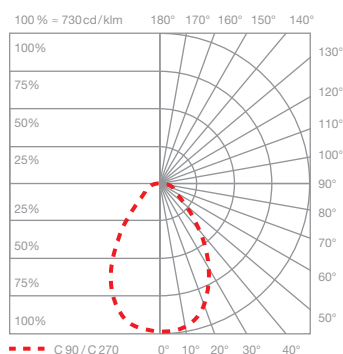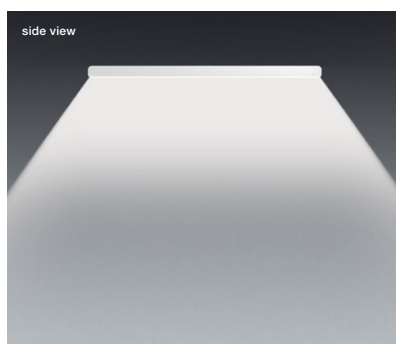

\*For a reliable assessment of glare values in a real application of a luminaire we recommend to carry out an individual calculation which can be prepared by our lighting team (lightingdesign@occhio.de).