


Più alto 3d pro datasheet

LED wall/ceiling spotlight with single-sided light output. Optionally available with lens optics (Più) or flat cone glass with internal lens (Più R).

Version with flat base for fitting on hollow ceiling or flush-mounted box with remote power supply unit, connection to external power source (driver). Dimmable via customer-supplied dimmable power supply unit. Movable in any direction thanks to Occhio 3D kinematics with two pivots set at an angle of 45° to each other. Using a simple mechanism, the lighting effect can be changed at any time through the use of optional inserts, dichroitic colour filter can be additionally inserted, Occhio light module with replaceable LED.

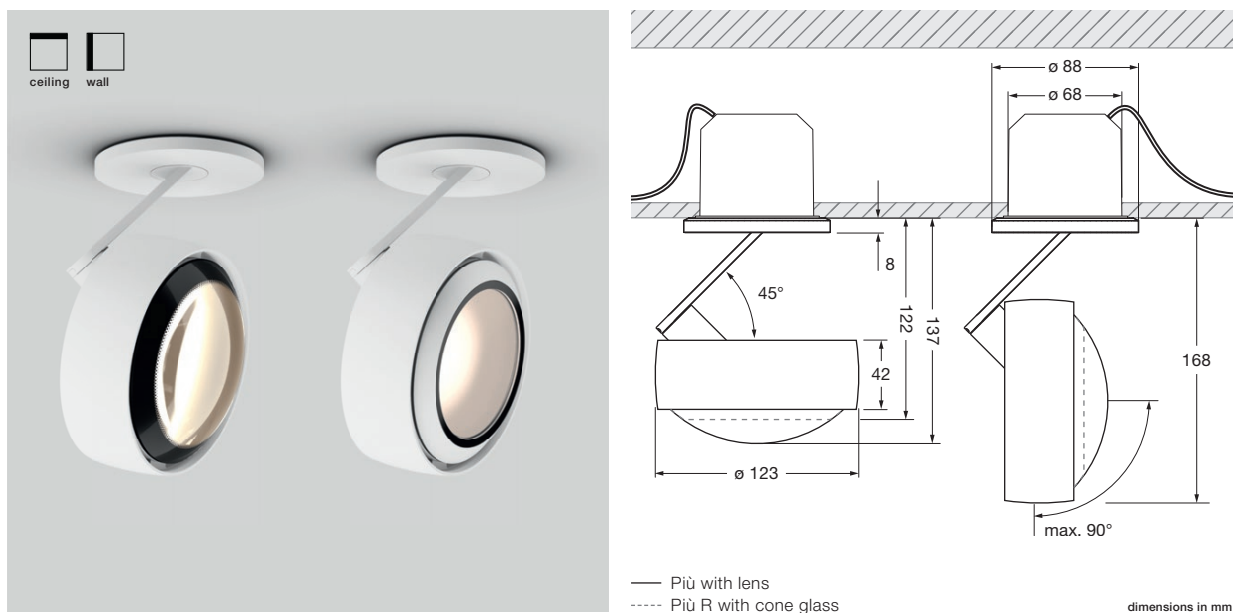



technical data Più alto 3d pro

properties	material	aluminium, brass, steel – chrome-plated or painted, optical plastic, glass		
	turning range body	360° (with stop)		
	turning range head	360° (with stop)		
	weight	1 kg		
surface	head	matt gold, rose gold, bronze, shiny chrome, matt chrome, glossy white, matt white, matt black, phantom, black phantom		
	body	shiny chrome, matt chrome, matt white, matt black		
	base	shiny chrome, matt chrome, glossy white, matt white, matt black		
	lens	matt white, matt black (lens edge)		
	cone glass	rose gold, bronze, shiny chrome, matt chrome, matt white, matt black, phantom, black phantom		
Occhio light module	average life time	> 50.000 hrs		
	energy efficiency class (luminous efficiency)	G (69 lm / W)		
	power	LED 26 W		
	color rendering index	perfect color; CRI Ra 97	high flux; CRI Ra 85	
	color temperature	2700 K, 3000 K	3000 K, 3500 K, 4000 K	
electricity	dimming	by trailing-edge phase-cut dimmer, button or DALI (depending on power supply unit)		
	power supply unit	remote, operation via constant-current source, max. 700 mA / > 36 V DC		
	permitted operating conditions	max. 30°C for indoor use only		

Più alto 3d pro overview optics

Più	C 80	S 100	S 80	S 60	S 40	S 30		
small lens low								
small lens medium								
satinised glass								
soft edge glass								
fresnel lens								
color filter (optional)								
lens								
Più R	B	C 100	C 80	S 100	S 80	S 60	S 40	S 30
small lens low								
small lens medium								
small lens high								
satinised glass								
soft edge glass								
fresnel lens								
color filter (optional)								
cone glass								
	diffus	100°, contour	80°, contour	100°, soft	80°, soft	60°, soft	40°, soft	30°, soft

Più alto 3d pro
Più lighting effects


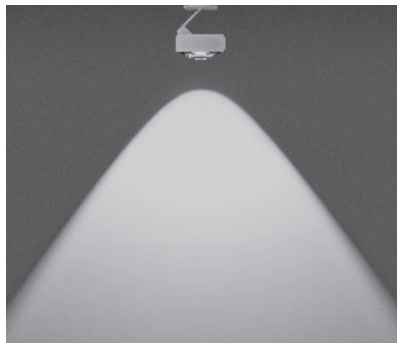


C 80 contour

scattered light with contour beam angle
(approx. 80°)

inserts: lens

luminous flux: perfect color 26 W 1640 lm
high flux 26 W 2240 lm

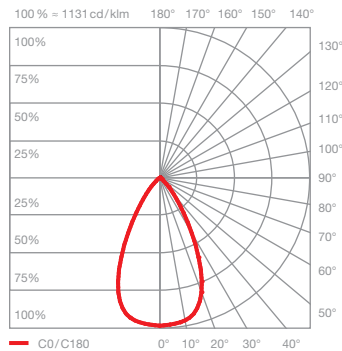
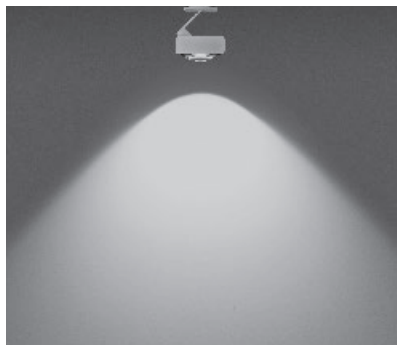


S 100 soft

scattered light with soft contour beam angle
(approx. 100°)

inserts: lens
satinised glass

luminous flux: perfect color 26 W 1260 lm
high flux 26 W 1720 lm

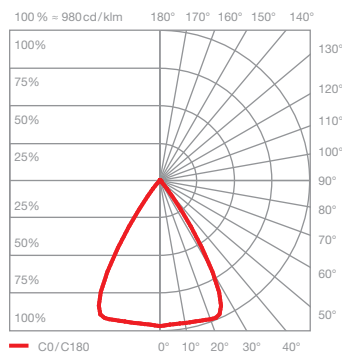
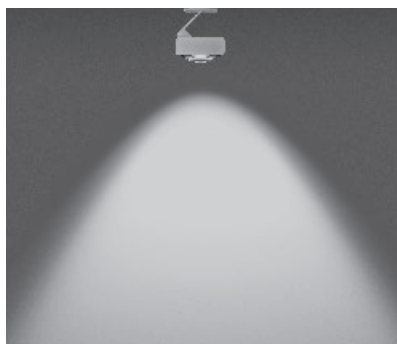


S 80 soft

scattered light with soft contour beam angle
(approx. 80°)

inserts: lens
soft edge glass

luminous flux: perfect color 26 W 1420 lm
high flux 26 W 1930 lm

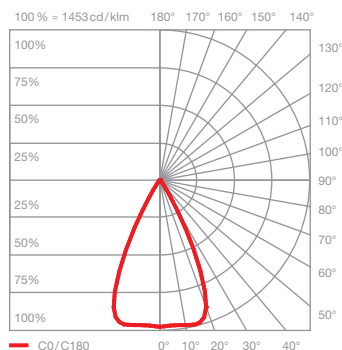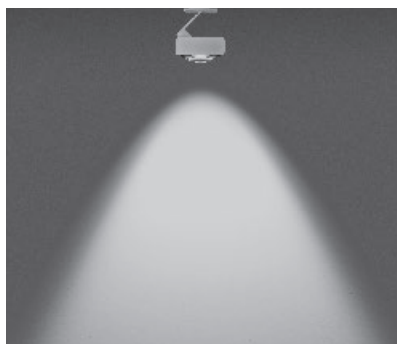



S 60 soft

scattered light with soft contour beam angle
(approx. 60°)

inserts: lens
small lens low
soft edge glass

luminous flux: perfect color 26 W 1610 lm
high flux 26 W 2200 lm

Più alto 3d pro
Più lighting effects

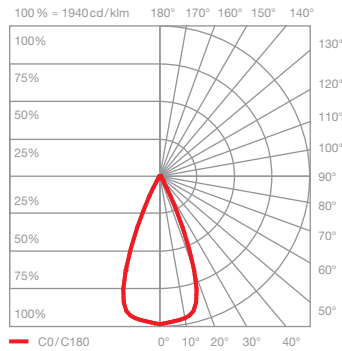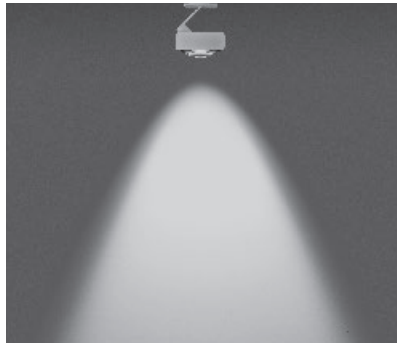


S40 soft

scattered light with soft contour beam angle (approx. 40°)

inserts: lens
small lens medium
soft edge glass

luminous flux: perfect color 26W 1680lm
high flux 26W 2300lm

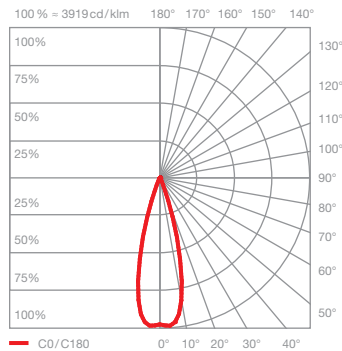


S30 soft

scattered light with soft contour beam angle (approx. 30°)

inserts: lens
small lens medium
fresnel lens

luminous flux: perfect color 26W 1650lm
high flux 26W 2250lm



Più alto 3d pro Più R lighting effects

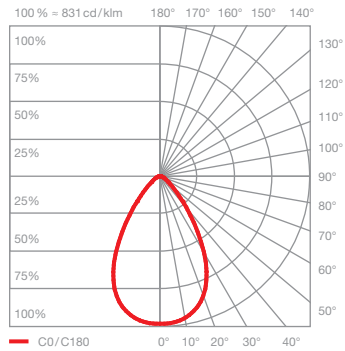

B diffus diffused light

inserts: cone glass
small lens low
satinised glass

luminous flux: perfect color 26W 1370lm
high flux 26W 1870lm

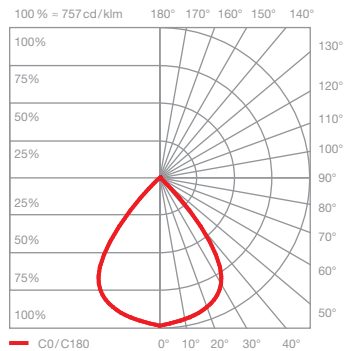
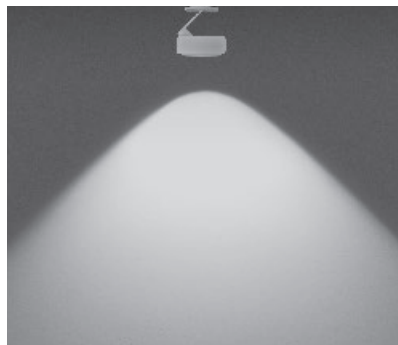


C 100 contour

scattered light with contour beam angle (approx. 100°)

inserts: cone glass
small lens low

luminous flux: perfect color 26W 1680lm
high flux 26W 2290lm

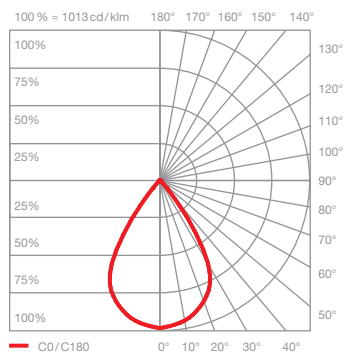
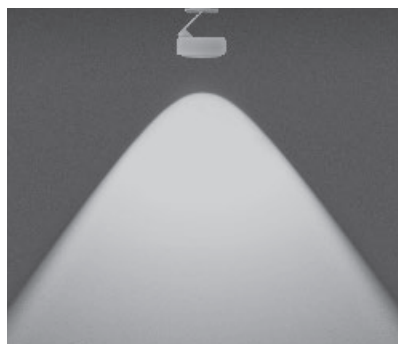


C 80 contour

scattered light with contour beam angle (approx. 80°)

inserts: cone glass
small lens medium

luminous flux: perfect color 26W 1810lm
high flux 26W 2460lm

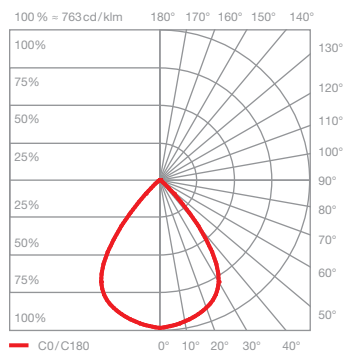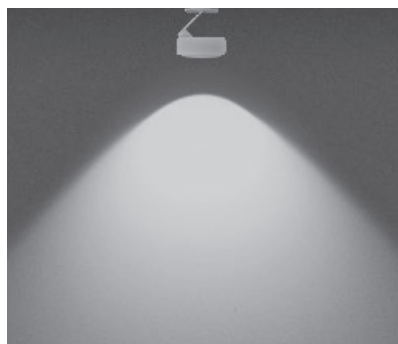



S 100 soft

scattered light with soft contour beam angle (approx. 100°)

inserts: cone glass
small lens low
soft edge glass

luminous flux: perfect color 26W 1520lm
high flux 26W 2070lm

Più alto 3d pro Più R lighting effects


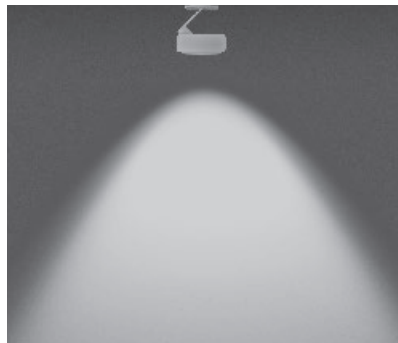


S80 soft

scattered light with soft contour beam angle (approx. 80°)

inserts: cone glass
small lens medium
soft edge glass

luminous flux: perfect color 26W 1690lm
high flux 26W 2310lm

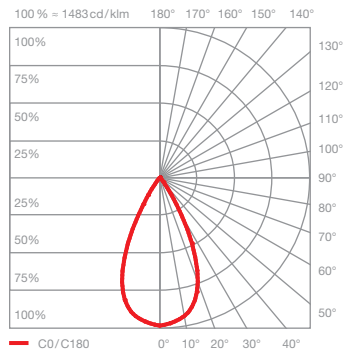
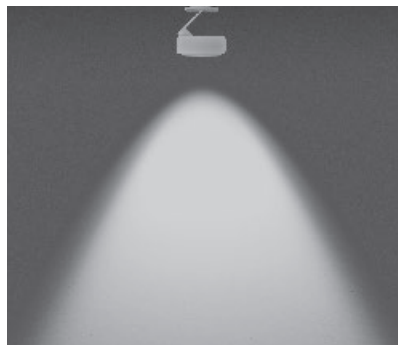


S60 soft

scattered light with soft contour beam angle (approx. 60°)

inserts: cone glass
small lens high
soft edge glass

luminous flux: perfect color 26W 1610lm
high flux 26W 2200lm

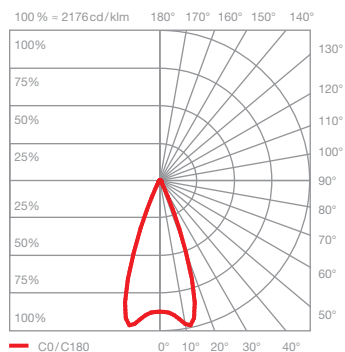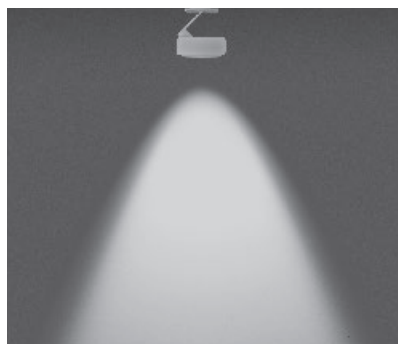


S40 soft

scattered light with soft contour beam angle (approx. 40°)

inserts: cone glass
small lens medium
fresnel lens

luminous flux: perfect color 26W 1600lm
high flux 26W 2190lm

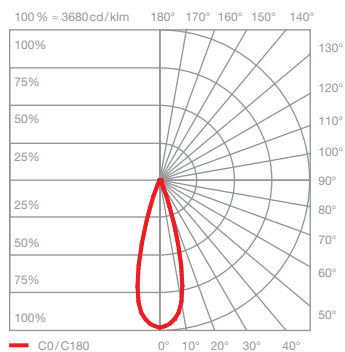

S30 soft

scattered light with soft contour beam angle (approx. 30°)

inserts: cone glass
small lens high
fresnel lens

luminous flux: perfect color 26W 1560lm
high flux 26W 2130lm