


Più alto 3d track DALI pro datasheet

LED wall/ceiling spotlight with single-sided light output. Optionally available with lens optics (Più) or flat cone glass with internal lens (Più R).

Version for 1- or 3-phase bus bar (EUTRAC-compatible) with integrated power supply unit, connection to 230 V AC / 50 Hz mains voltage. Dimmable via DALI. Movable in any direction thanks to Occhio 3D kinematics with two pivots set at an angle of 45° to each other. Using a simple mechanism, the lighting effect can be changed at any time through the use of optional inserts, dichroitic colour filter can be additionally inserted, Occhio light module with replaceable LED.

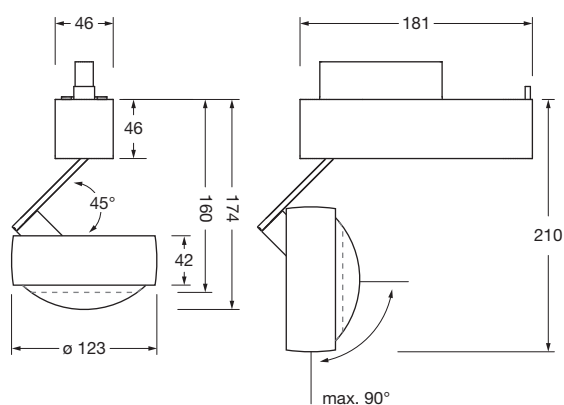

— Più with lens
 ----- Più R with cone glass

dimensions in mm



technical data Più alto 3d track DALI pro

properties	material	aluminium, brass, steel – chrome-plated or painted, optical plastic, glass	
	turning range body	360° (with stop)	
	turning range head	360° (with stop)	
	weight	1.2 kg	
surface	head	matt gold, rose gold, bronze, shiny chrome, matt chrome, glossy white, matt white, matt black, phantom, black phantom	
	body	shiny chrome, matt chrome, matt white, matt black	
	track housing	shiny chrome, matt chrome, glossy white, matt white, matt black	
	lens	matt white, matt black (lens edge)	
	cone glass	rose gold, bronze, shiny chrome, matt chrome, matt white, matt black, phantom, black phantom	
Occhio light module	average life time	> 50.000 hrs	
	energy efficiency class (luminous efficiency)	G (69 lm / W)	
	power	LED 26 W	
	color rendering index	perfect color; CRI Ra 97	high flux; CRI Ra 85
	color temperature	2700 K, 3000 K	3000 K, 3500 K, 4000 K
electricity	dimming	by DALI	
	power supply unit	integrated, operation at 230 V AC / 50 Hz	
	permitted operating conditions	max. 30°C for indoor use only	

Più alto 3d track DALI pro overview optics

Più		C 80	S 100	S 80	S 60	S 40	S 30	
small lens low								
small lens medium								
satinsised glass								
soft edge glass								
fresnel lens								
color filter (optional)								
lens								
Più R	B	C 100	C 80	S 100	S 80	S 60	S 40	S 30
small lens low								
small lens medium								
small lens high								
satinsised glass								
soft edge glass								
fresnel lens								
color filter (optional)								
cone glass								
	diffus	100°, contour	80°, contour	100°, soft	80°, soft	60°, soft	40°, soft	30°, soft

Più alto 3d track DALI pro
Più lighting effects

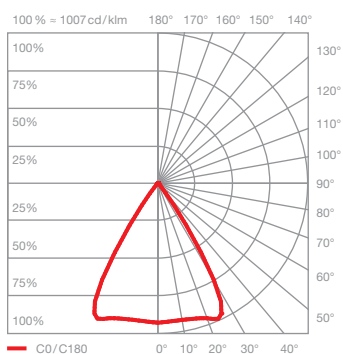
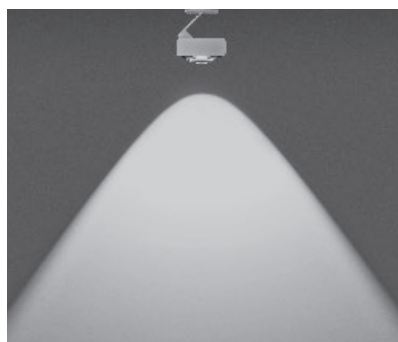


C 80 contour

scattered light with contour beam angle
(approx. 80°)

inserts: lens

luminous flux:	perfect color	26 W	1640 lm
	high flux	26 W	2240 lm

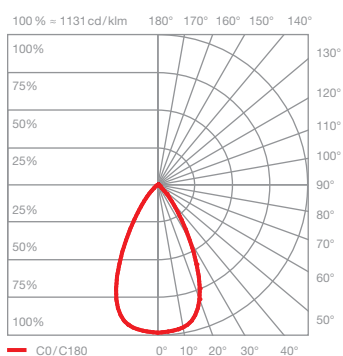
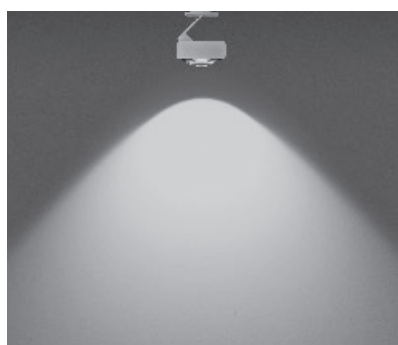


S 100 soft

scattered light with soft contour beam angle
(approx. 100°)

inserts: lens
satinised glass

luminous flux:	perfect color	26 W	1260 lm
	high flux	26 W	1720 lm

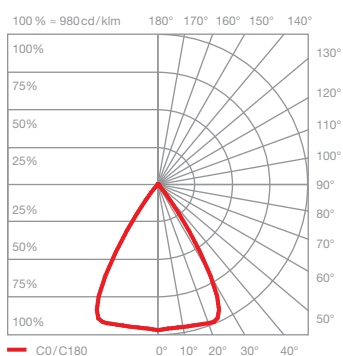
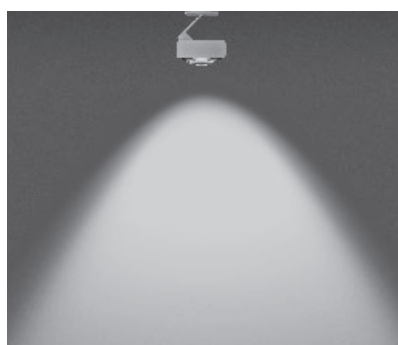


S 80 soft

scattered light with soft contour beam angle
(approx. 80°)

inserts: lens
soft edge glass

luminous flux:	perfect color	26 W	1420 lm
	high flux	26 W	1930 lm

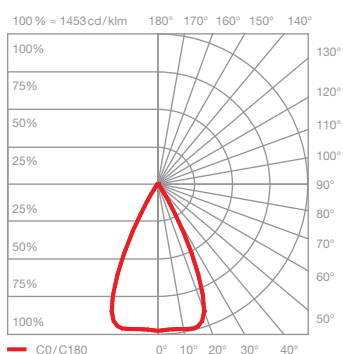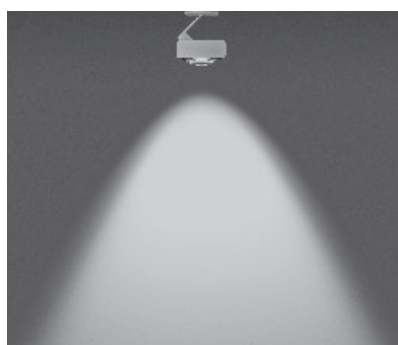



S 60 soft

scattered light with soft contour beam angle
(approx. 60°)

inserts: lens
small lens low
soft edge glass

luminous flux:	perfect color	26 W	1610 lm
	high flux	26 W	2200 lm

Più alto 3d track DALI pro
Più lighting effects

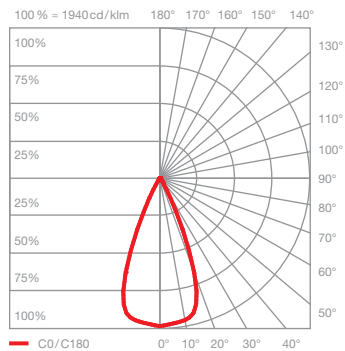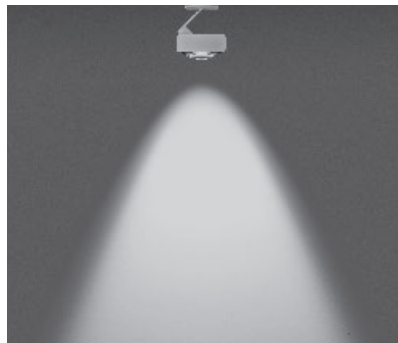


S40 soft

scattered light with soft contour beam angle (approx. 40°)

inserts: lens
small lens medium
soft edge glass

luminous flux: perfect color 26 W 1680 lm
high flux 26 W 2300 lm

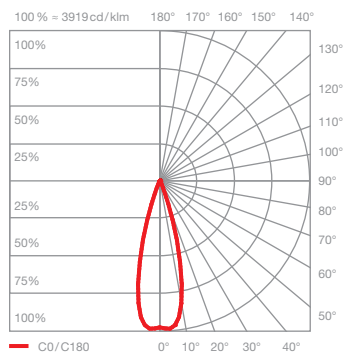


S30 soft

scattered light with soft contour beam angle (approx. 30°)

inserts: lens
small lens medium
fresnel lens

luminous flux: perfect color 26 W 1650 lm
high flux 26 W 2250 lm



Più alto 3d track DALI pro Più R lighting effects

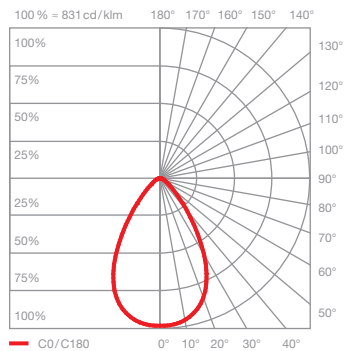

B diffus diffused light

inserts: cone glass
small lens low
satinised glass



luminous flux: perfect color 26 W 1370 lm
high flux 26 W 1870 lm

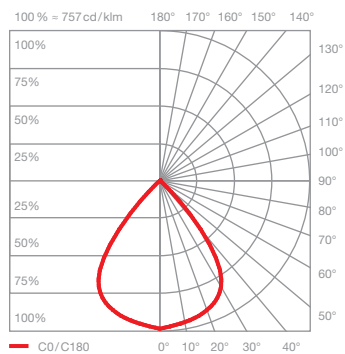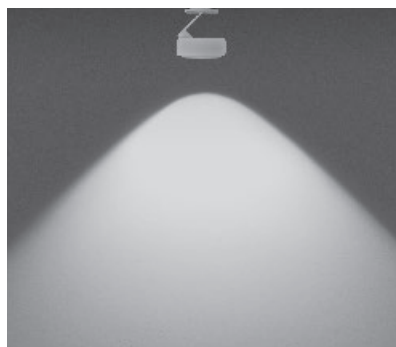

C 100 contour scattered light with contour beam angle (approx. 100°)

inserts: cone glass
small lens low



luminous flux: perfect color 26 W 1680 lm
high flux 26 W 2290 lm

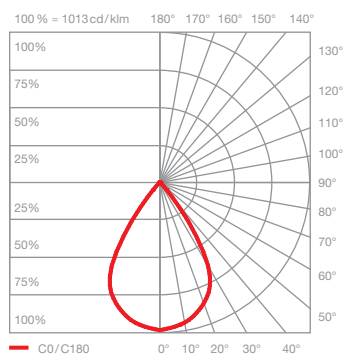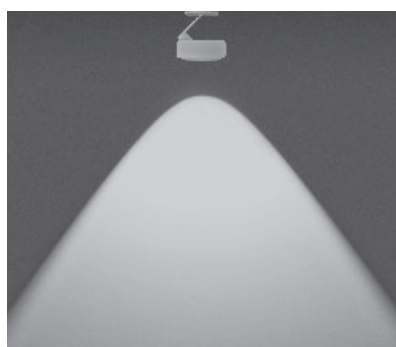

C 80 contour scattered light with contour beam angle (approx. 80°)

inserts: cone glass
small lens medium

luminous flux: perfect color 26 W 1810 lm
high flux 26 W 2460 lm

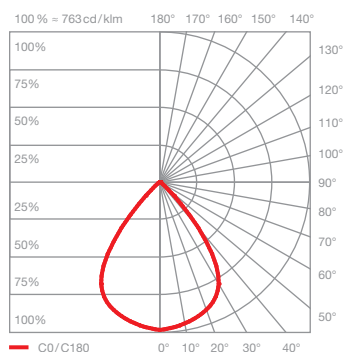
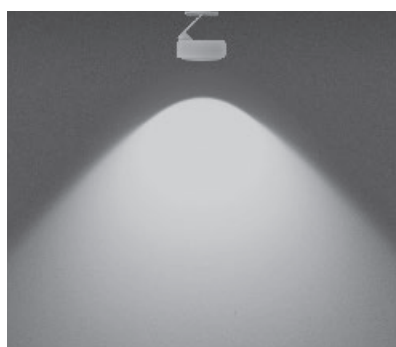


S 100 soft scattered light with soft contour beam angle (approx. 100°)

inserts: cone glass
small lens low
soft edge glass

luminous flux: perfect color 26 W 1520 lm
high flux 26 W 2070 lm

Più alto 3d track DALI pro Più R lighting effects

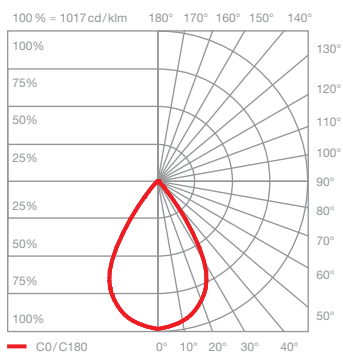
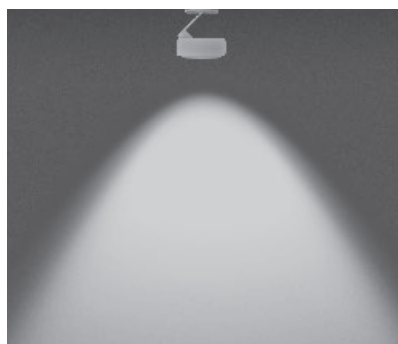


S80 soft

scattered light with soft contour beam angle
(approx. 80°)

inserts: cone glass
small lens medium
soft edge glass

luminous flux: perfect color 26W 1690lm
high flux 26W 2310lm

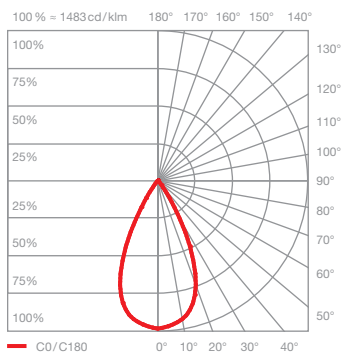
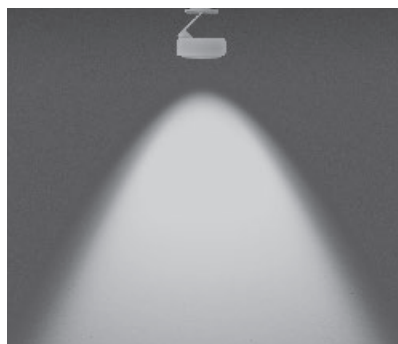


S60 soft

scattered light with soft contour beam angle
(approx. 60°)

inserts: cone glass
small lens high
soft edge glass

luminous flux: perfect color 26W 1610lm
high flux 26W 2200lm

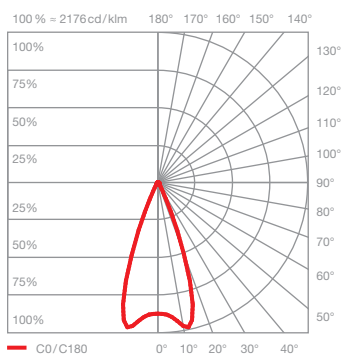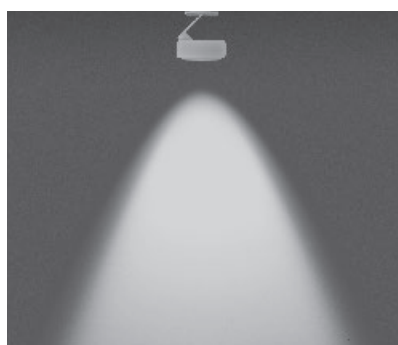


S40 soft

scattered light with soft contour beam angle
(approx. 40°)

inserts: cone glass
small lens medium
fresnel lens

luminous flux: perfect color 26W 1600lm
high flux 26W 2190lm

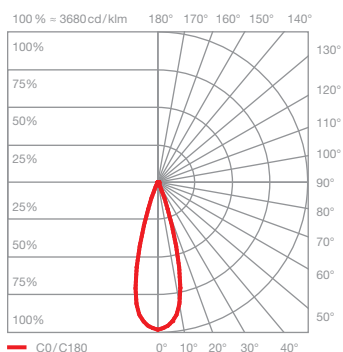

S30 soft

scattered light with soft contour beam angle
(approx. 30°)

inserts: cone glass
small lens high
fresnel lens

luminous flux: perfect color 26W 1560lm
high flux 26W 2130lm