


Più alto pro datasheet

LED ceiling spotlight with single-sided light output. Optionally available with lens optics (Più) or flat cone glass with internal lens (Più R).

Version for fitting on hollow ceiling box or ceiling box with remote power supply unit, connection to external power source (driver). Dimmable via customer-supplied dimmable power supply unit. Thanks to the special fastening technology, it can be rotated through 360° and pivoted by 52° using the integrated joint. Can be fixed in a vertical position for use as a downlight. Using a simple mechanism, the lighting effect can be changed at any time through the use of optional inserts, dichroitic colour filter can be additionally inserted, Occhio light module with replaceable LED.

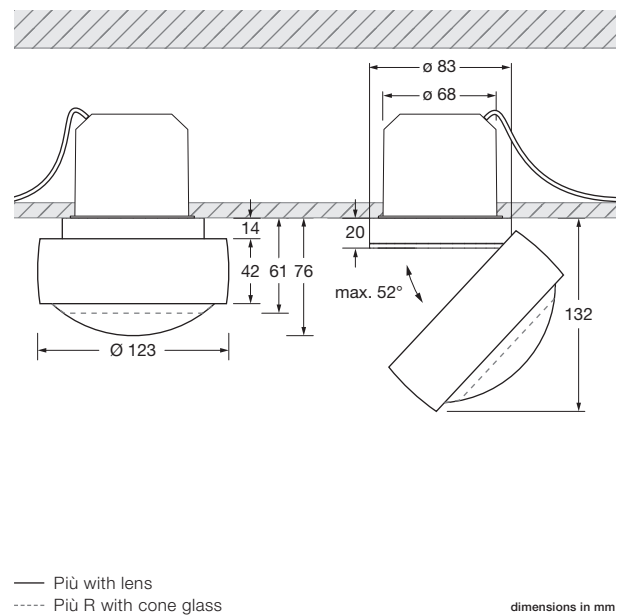



technical data Più alto pro

properties	material	aluminium, brass, steel – chrome-plated or painted, optical plastic, glass	
	turning range body	360° (with stop)	
	mobility head	52° (with stop)	
	weight	1 kg	
surface	head	matt gold, rose gold, bronze, shiny chrome, matt chrome, glossy white, matt white, matt black phantom, black phantom	
	base	shiny chrome, matt chrome, matt white, matt black	
	lens	matt white, matt black (lens edge)	
	cone glass	rose gold, bronze, shiny chrome, matt chrome matt white, matt black, phantom, black phantom	
Occhio light module	average life time	> 50.000 hrs	
	energy efficiency class (luminous efficiency)	G (69 lm / W)	
	power	LED 26 W	
	color rendering index	perfect color; CRI Ra 97	high flux; CRI Ra 85
	color temperature	2700 K, 3000 K	3000 K, 3500 K, 4000 K
electricity	dimming	by trailing-edge phase-cut dimmer, button or DALI (depending on power supply unit)	
	power supply unit	remote, operation via constant-current source, max. 700 mA / > 36 V DC	
	permitted operating conditions	max. 30°C for indoor use only	

Più alto pro overview optics

Più	C 80	S 100	S 80	S 60	S 40	S 30		
small lens low								
small lens medium								
satinised glass								
soft edge glass								
fresnel lens								
color filter (optional)								
lens								
Più R	B	C 100	C 80	S 100	S 80	S 60	S 40	S 30
small lens low								
small lens medium								
small lens high								
satinised glass								
soft edge glass								
fresnel lens								
color filter (optional)								
cone glass								
	diffus	100°, contour	80°, contour	100°, soft	80°, soft	60°, soft	40°, soft	30°, soft



Più alto pro
Più lighting effects

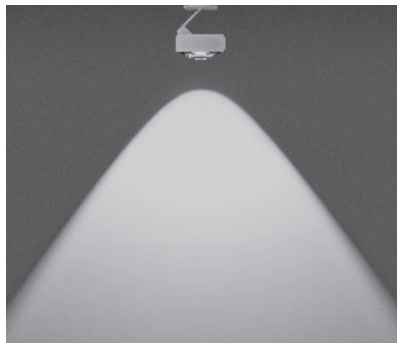

C 80 contour
scattered light with contour beam angle
(approx. 80°)

inserts: lens



luminous flux: perfect color 26 W 1640 lm
high flux 26 W 2240 lm

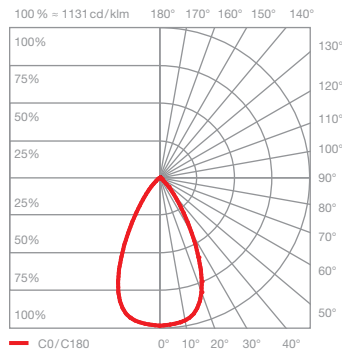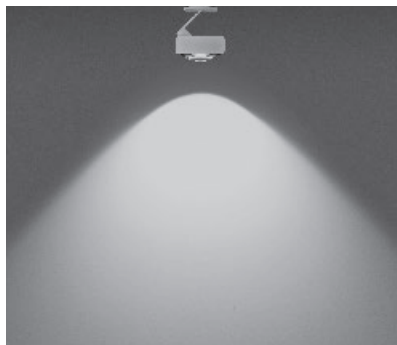

S 100 soft
scattered light with soft contour beam angle
(approx. 100°)

inserts: lens
satinised glass



luminous flux: perfect color 26 W 1260 lm
high flux 26 W 1720 lm

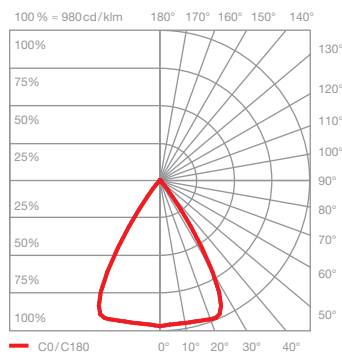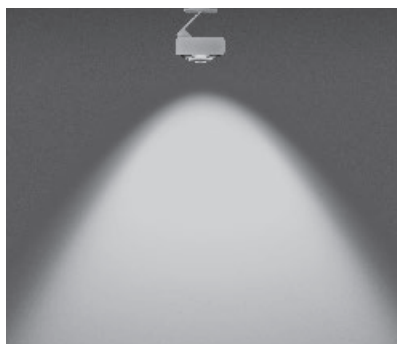

S 80 soft
scattered light with soft contour beam angle
(approx. 80°)

inserts: lens
soft edge glass

luminous flux: perfect color 26 W 1420 lm
high flux 26 W 1930 lm

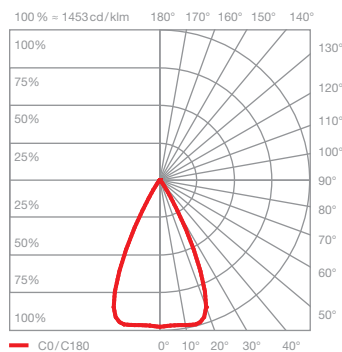
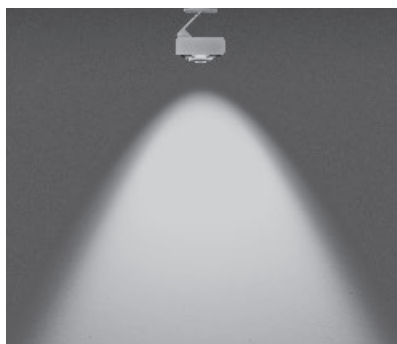


S 60 soft
scattered light with soft contour beam angle
(approx. 60°)

inserts: lens
small lens low
soft edge glass

luminous flux: perfect color 26 W 1610 lm
high flux 26 W 2200 lm

Più alto pro
Più lighting effects

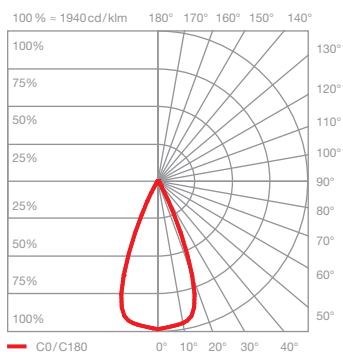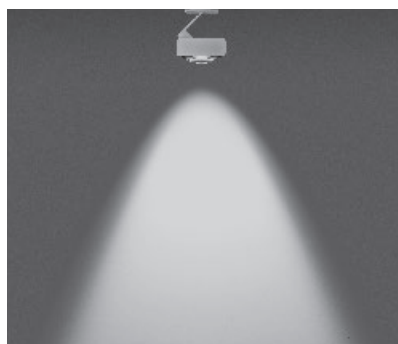


S40 soft

scattered light with soft contour beam angle (approx. 40°)

inserts: lens
small lens medium
soft edge glass

luminous flux: perfect color 26W 1680lm
high flux 26W 2300lm

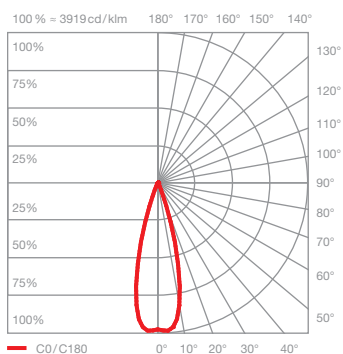



S30 soft

scattered light with soft contour beam angle (approx. 30°)

inserts: lens
small lens medium
fresnel lens

luminous flux: perfect color 26W 1650lm
high flux 26W 2250lm



Più alto pro Più R lighting effects

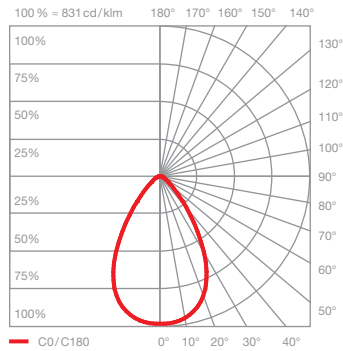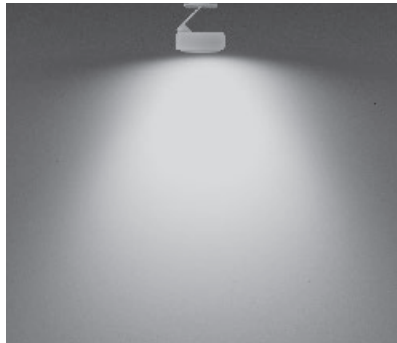

B diffus diffused light

inserts: cone glass
small lens low
satinised glass



luminous flux: perfect color 26W 1370lm
high flux 26W 1870lm

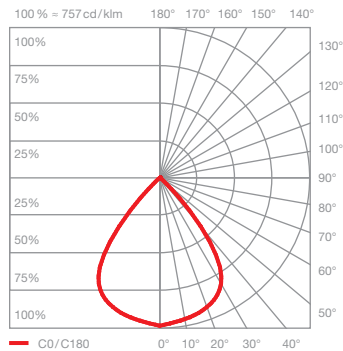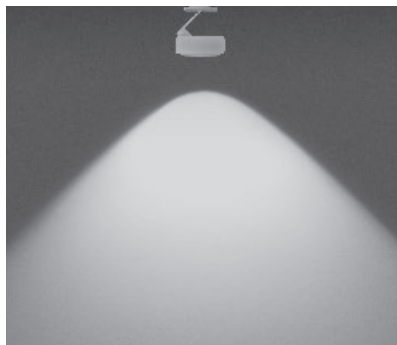

C 100 contour scattered light with contour beam angle (approx. 100°)

inserts: cone glass
small lens low



luminous flux: perfect color 26W 1680lm
high flux 26W 2290lm

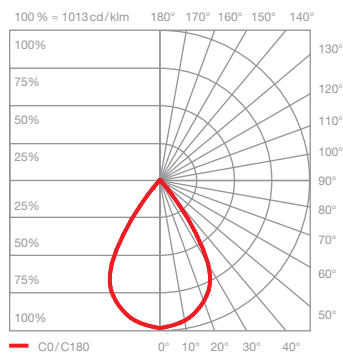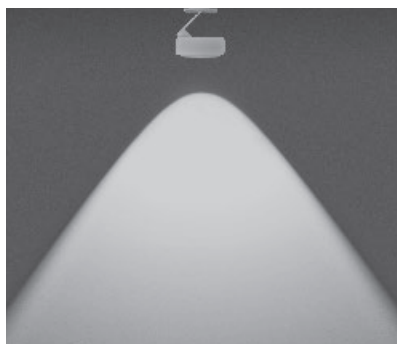

C 80 contour scattered light with contour beam angle (approx. 80°)

inserts: cone glass
small lens medium

luminous flux: perfect color 26W 1810lm
high flux 26W 2460lm

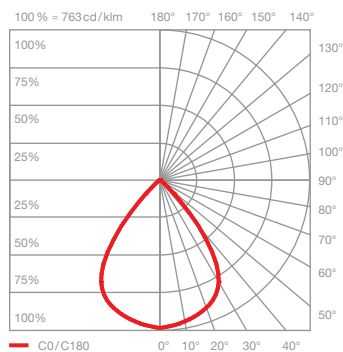
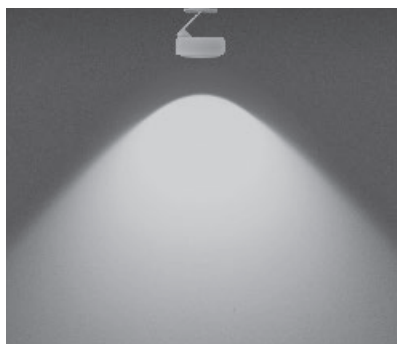


S 100 soft scattered light with soft contour beam angle (approx. 100°)

inserts: cone glass
small lens low
soft edge glass

luminous flux: perfect color 26W 1520lm
high flux 26W 2070lm

Più alto pro Più R lighting effects

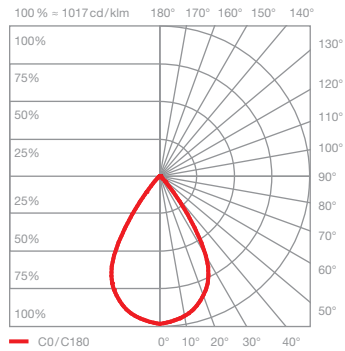
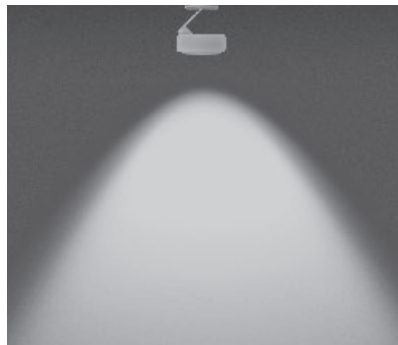


S80 soft

scattered light with soft contour beam angle (approx. 80°)

inserts: cone glass
small lens medium
soft edge glass

luminous flux: perfect color 26W 1690lm
high flux 26W 2310lm

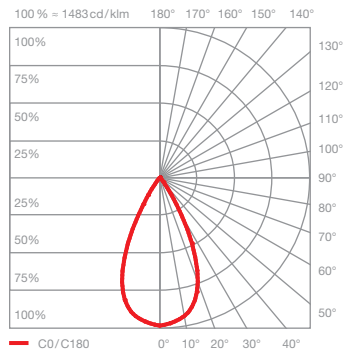
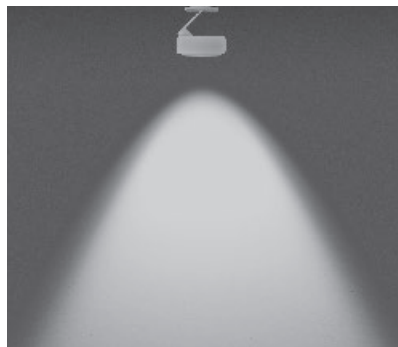


S60 soft

scattered light with soft contour beam angle (approx. 60°)

inserts: cone glass
small lens high
soft edge glass

luminous flux: perfect color 26W 1610lm
high flux 26W 2200lm

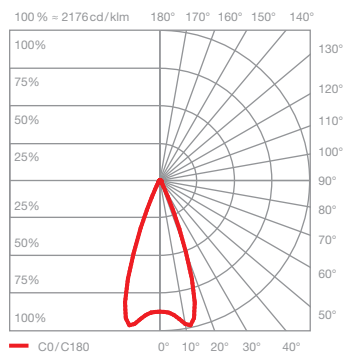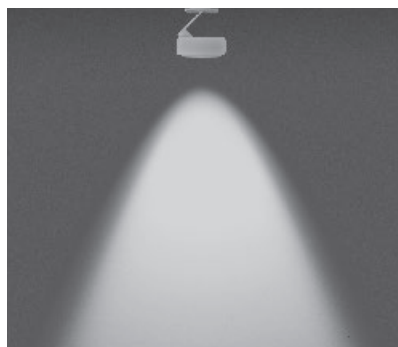


S40 soft

scattered light with soft contour beam angle (approx. 40°)

inserts: cone glass
small lens medium
fresnel lens

luminous flux: perfect color 26W 1600lm
high flux 26W 2190lm

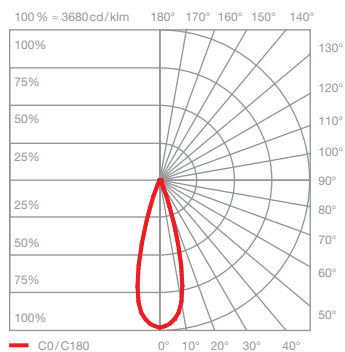

S30 soft

scattered light with soft contour beam angle (approx. 30°)

inserts: cone glass
small lens high
fresnel lens

luminous flux: perfect color 26W 1560lm
high flux 26W 2130lm