
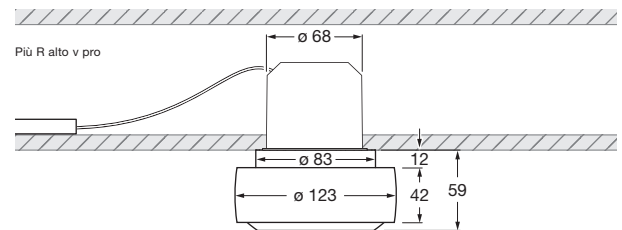


## Più alto v pro datasheet

LED ceiling spotlight with single-sided light output for use as a downlight. Choice of lens design (Più) or flat cone glass with interior lens (Più R).

Version for mounting on cavity or ceiling box with external power supply unit, connection to power source (driver). Can be dimmed at the installation location through dimmable power supply unit.

Using optional inserts and activating a simple mechanism allows the lighting effect to be changed at any time. Dichroic color filters can also be used, and the Occhio light engine can be exchanged.

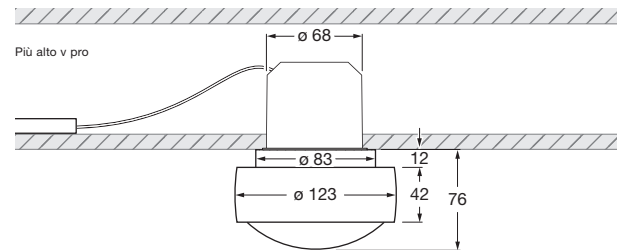

dimensions in mm



### technical data Più alto v pro

properties	material	aluminium, brass, steel – chrome-plated or painted, plastic, optical plastic, glass
	weight	0.85 kg
surface	head	matt gold, rose gold, bronze, shiny chrome, matt chrome, glossy white, matt white, matt black, phantom, black phantom
	base	shiny chrome, matt chrome, matt white, matt black
	lens	matt white, matt black (lens edge)
	cone glass	rose gold, bronze, shiny chrome, matt chrome matt white, matt black, phantom, black phantom
Occhio light module	average life time	> 50.000 hrs
	energy efficiency class (luminous efficiency)	G (69 lm / W)
	power	LED 26 W
	color rendering index	perfect color; CRI Ra 97
electricity	color temperature	2700 K, 3000 K
	dimming	with suitable power supply unit
	power supply unit	remote, operation via constant-current source, max. 700 mA / > 36 V DC
	permitted operating conditions	max. 30°C for indoor use only

## Più alto v pro overview optics

Più	C 80	S 100	S 80	S 60	S 40	S 30		
small lens low								
small lens medium								
satinised glass								
soft edge glass								
fresnel lens								
color filter (optional)								
lens								
Più R	B	C 100	C 80	S 100	S 80	S 60	S 40	S 30
small lens low								
small lens medium								
small lens high								
satinised glass								
soft edge glass								
fresnel lens								
color filter (optional)								
cone glass								
	diffus	100°, contour	80°, contour	100°, soft	80°, soft	60°, soft	40°, soft	30°, soft



Più alto v pro  
Più lighting effects

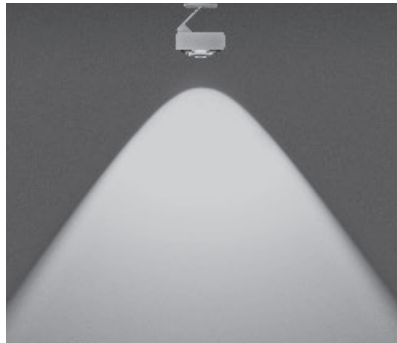

**C 80 contour**  
scattered light with contour beam angle  
(approx. 80°)

inserts: lens



luminous flux: perfect color 26 W 1640 lm  
high flux 26 W 2240 lm

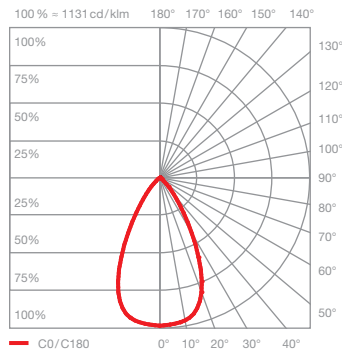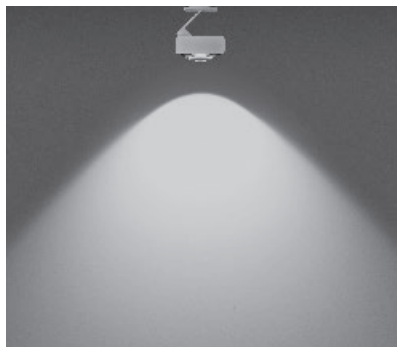

**S 100 soft**  
scattered light with soft contour beam angle  
(approx. 100°)

inserts: lens  
satinised glass



luminous flux: perfect color 26 W 1260 lm  
high flux 26 W 1720 lm

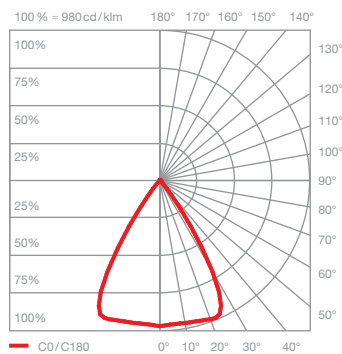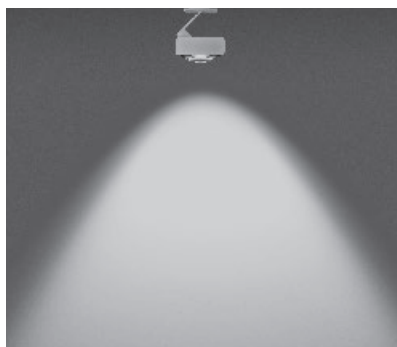

**S 80 soft**  
scattered light with soft contour beam angle  
(approx. 80°)

inserts: lens  
soft edge glass

luminous flux: perfect color 26 W 1420 lm  
high flux 26 W 1930 lm

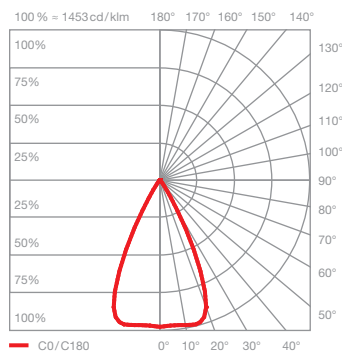
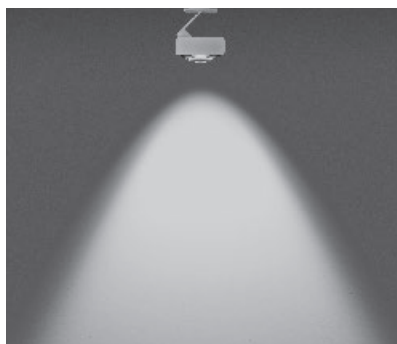


**S 60 soft**  
scattered light with soft contour beam angle  
(approx. 60°)

inserts: lens  
small lens low  
soft edge glass

luminous flux: perfect color 26 W 1610 lm  
high flux 26 W 2200 lm

Più alto v pro  
Più lighting effects

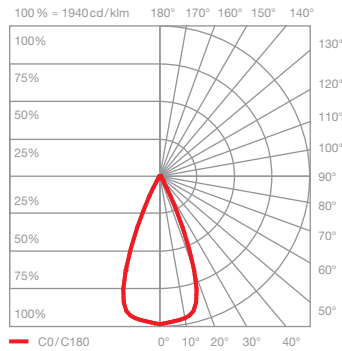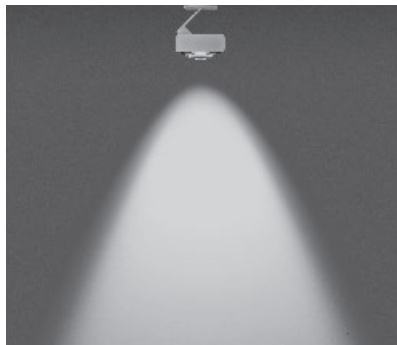


### S40 soft

scattered light with soft contour beam angle (approx. 40°)

inserts: lens  
small lens medium  
soft edge glass

luminous flux: perfect color 26W 1680lm  
high flux 26W 2300lm

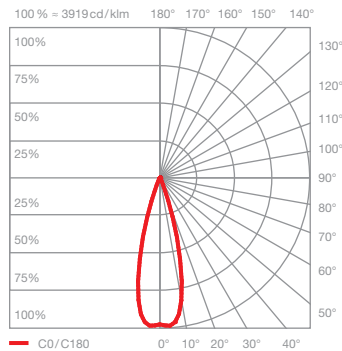



### S30 soft

scattered light with soft contour beam angle (approx. 30°)

inserts: lens  
small lens medium  
fresnel lens

luminous flux: perfect color 26W 1650lm  
high flux 26W 2250lm



Più alto v pro  
Più R lighting effects

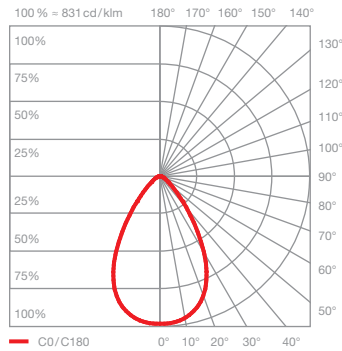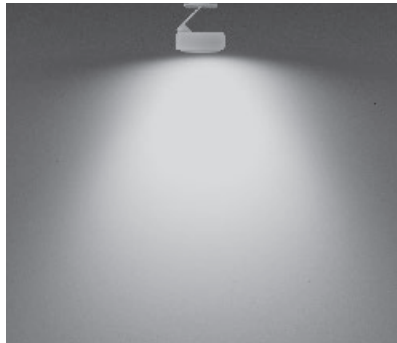

**B diffus**  
diffused light

inserts: cone glass  
small lens low  
satinised glass



luminous flux: perfect color 26W 1370lm  
high flux 26W 1870lm

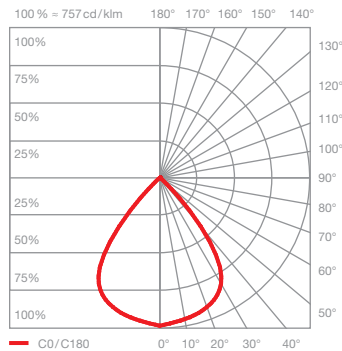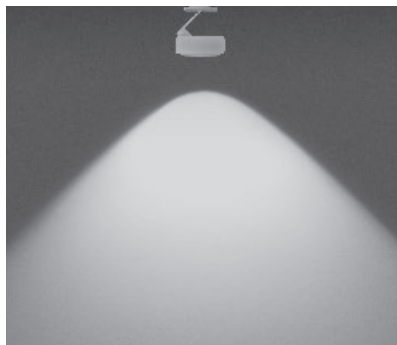

**C 100 contour**  
scattered light with contour beam angle (approx. 100°)

inserts: cone glass  
small lens low



luminous flux: perfect color 26W 1680lm  
high flux 26W 2290lm

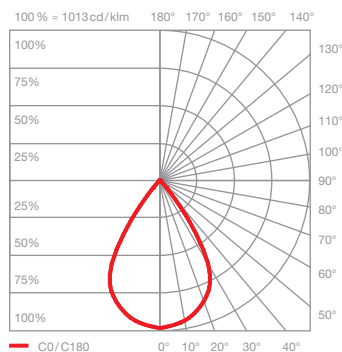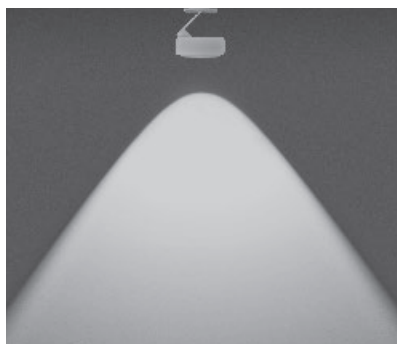

**C 80 contour**  
scattered light with contour beam angle (approx. 80°)

inserts: cone glass  
small lens medium

luminous flux: perfect color 26W 1810lm  
high flux 26W 2460lm

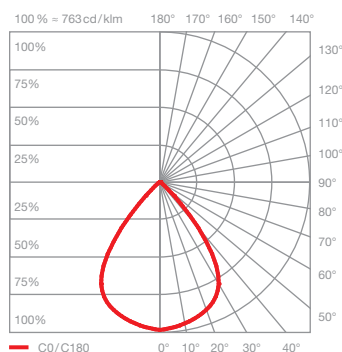
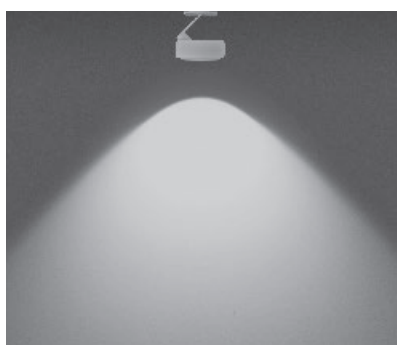


**S 100 soft**  
scattered light with soft contour beam angle (approx. 100°)

inserts: cone glass  
small lens low  
soft edge glass

luminous flux: perfect color 26W 1520lm  
high flux 26W 2070lm



Più alto v pro  
Più R lighting effects

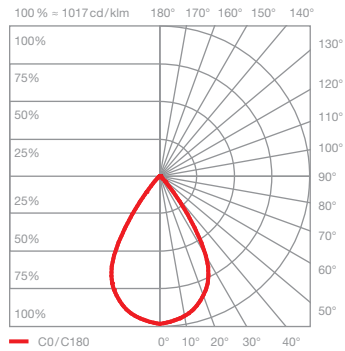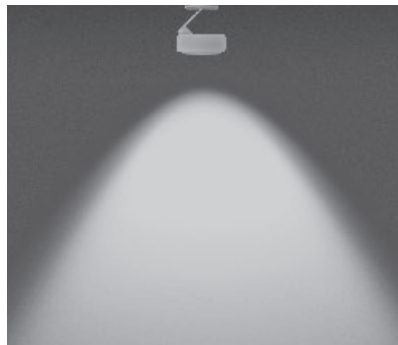

**S80 soft**  
scattered light with soft contour beam angle  
(approx. 80°)

inserts: cone glass  
small lens medium  
soft edge glass



luminous flux: perfect color 26W 1690lm  
high flux 26W 2310lm

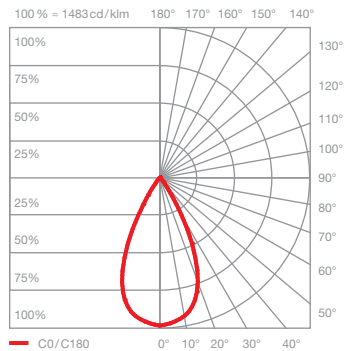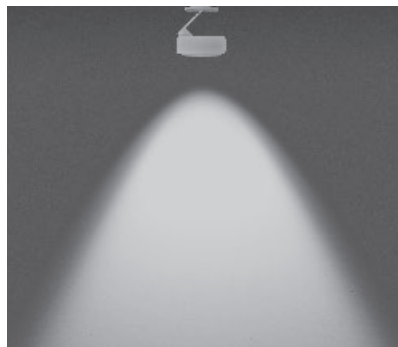

**S60 soft**  
scattered light with soft contour beam angle  
(approx. 60°)

inserts: cone glass  
small lens high  
soft edge glass


luminous flux: perfect color 26W 1610lm  
high flux 26W 2200lm

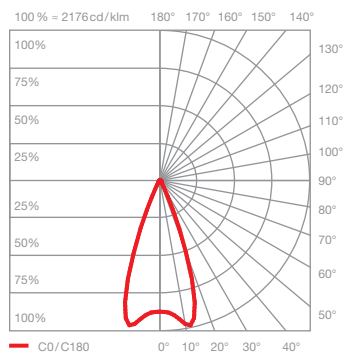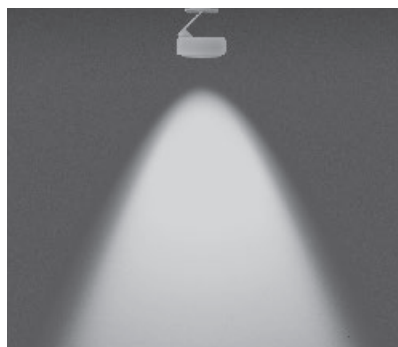

**S40 soft**  
scattered light with soft contour beam angle  
(approx. 40°)

inserts: cone glass  
small lens medium  
fresnel lens

luminous flux: perfect color 26W 1600lm  
high flux 26W 2190lm

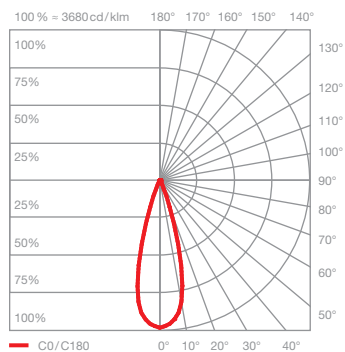

**S30 soft**  
scattered light with soft contour beam angle  
(approx. 30°)

inserts: cone glass  
small lens high  
fresnel lens

luminous flux: perfect color 26W 1560lm  
high flux 26W 2130lm