Occhio

Più piano v pro
datasheet

LED recessed spotlight (downlight non-tiltable) with magnetically attached covers (round & square) for flush mounting in hollow ceilings or solid ceilings with ceiling box. The spotlight is mounted with a simple tension spring mechanism and requires no screw fittings.

Choice of lens design (Più) or flat cone glass with interior lens (Più R). Version with external power supply unit, connection to power source (driver). Can be dimmed at the installation location with a dimmable power supply unit. Optional inserts allow the lighting effect to be changed at any time with a simple mechanism; dichroic color filters can also be used, Occhio light modules can be exchanged.

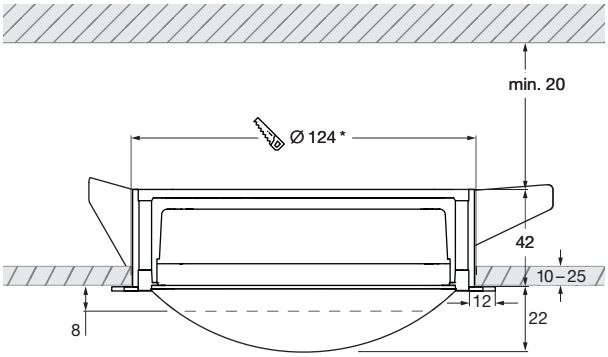

—— Più with lens
----- Più R with cone glass

* cut-out dimensions
Installation depth: 62 mm
dimensions in mm

technical data Più piano v pro

properties	material	aluminium, brass, steel – chrome-plated or painted, optical plastic, glass	
	weight	0.8 kg	
surface	head / tube	matt white, matt black	
	lens	matt white, matt black (lens edge)	
	cone glass	rose gold, bronze, shiny chrome, matt chrome, matt white, matt black, phantom, black phantom	
	cover	matt gold, rose gold, bronze, shiny chrome, matt chrome, glossy white, matt white, matt black, phantom, black phantom	
Occhio light module	average life time	> 50.000 hrs	
	energy efficiency class (luminous efficiency)	G (69 lm / W)	
	power	LED 26 W	
	color rendering index	perfect color; CRI Ra 97	high flux; CRI Ra 85
	color temperature	2700 K, 3000 K, 4000 K	3000 K, 3500 K, 4000 K
electricity	dimming	with suitable power supply unit	
	power supply unit	max. 700 mA const. / > 36 V DC	
	permitted operating conditions	max. 30°C for indoor use only	

IP 20

Più piano v pro

Più piano v pro
head H 38 mm, ø 125 mm



mounting tube with cover



hollow ceiling



concrete ceiling
(Kaiser HaloX 250 with mineral-fibre board)
driver max. L 210 mm × W 30 mm



cover

* cut-out dimensions

Più piano v pro overview optics

Più	C 80	S 100	S 80	S 60	S 40	S 30
small lens low				●		
small lens medium					●	●
satinised glass		●				
soft edge glass			●	●	●	
fresnel lens						●
color filter (optional)	●	●	●	●	●	●
lens	●	●	●	●	●	●

Più R	B	C 100	C 80	S 100	S 80	S 60	S 40	S 30
small lens low	●	●		●				
small lens medium			●		●		●	
small lens high						●		●
satinised glass	●							
soft edge glass				●	●	●		
fresnel lens							●	●
color filter (optional)	●	●	●	●	●	●	●	●
cone glass	●	●	●	●	●	●	●	●
	diffus	100°, contour	80°, contour	100°, soft	80°, soft	60°, soft	40°, soft	30°, soft

Più piano v pro
Più lighting effects



C 80 contour
scattered light with contour beam angle (approx. 80°)

inserts:	lens		
luminous flux:	perfect color	26 W	1640 lm
	high flux	26 W	2240 lm



S 100 soft
scattered light with soft contour beam angle (approx. 100°)

inserts:	lens satinised glass		
luminous flux:	perfect color	26 W	1260 lm
	high flux	26 W	1720 lm



S 80 soft
scattered light with soft contour beam angle (approx. 80°)

inserts:	lens soft edge glass		
luminous flux:	perfect color	26 W	1420 lm
	high flux	26 W	1930 lm



S 60 soft
scattered light with soft contour beam angle (approx. 60°)

inserts:	lens small lens low soft edge glass		
luminous flux:	perfect color	26 W	1610 lm
	high flux	26 W	2200 lm

Più piano v pro
Più lighting effects

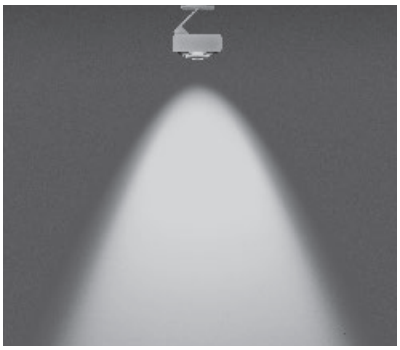



S 40 soft
scattered light with soft contour beam angle (approx. 40°)

inserts:	lens small lens medium soft edge glass		
luminous flux:	perfect color	26 W	1680 lm
	high flux	26 W	2300 lm



S 30 soft
scattered light with soft contour beam angle (approx. 30°)

inserts:	lens small lens medium fresnel lens		
luminous flux:	perfect color	26 W	1650 lm
	high flux	26 W	2250 lm

Più piano v pro
Più R lighting effects

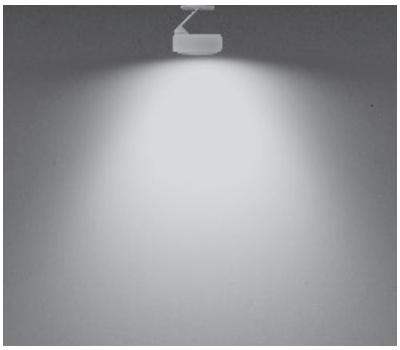



B diffus
diffused light

inserts:	cone glass small lens low satinised glass		
luminous flux:	perfect color	26 W	1370 lm
	high flux	26 W	1870 lm



C 100 contour
scattered light with contour beam angle (approx. 100°)

inserts:	cone glass small lens low		
luminous flux:	perfect color	26 W	1680 lm
	high flux	26 W	2290 lm

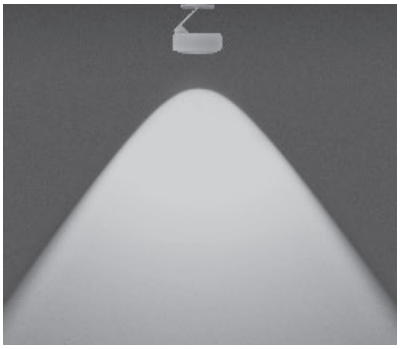



C 80 contour
scattered light with contour beam angle (approx. 80°)

inserts:	cone glass small lens medium		
luminous flux:	perfect color	26 W	1810 lm
	high flux	26 W	2460 lm



S 100 soft
scattered light with soft contour beam angle (approx. 100°)

inserts:	cone glass small lens low soft edge glass		
luminous flux:	perfect color	26 W	1520 lm
	high flux	26 W	2070 lm

Più piano v pro
Più R lighting effects



S 80 soft
scattered light with soft contour beam angle (approx. 80°)

inserts:	cone glass small lens medium soft edge glass		
luminous flux:	perfect color	26 W	1690 lm
	high flux	26 W	2310 lm



S 60 soft
scattered light with soft contour beam angle (approx. 60°)

inserts:	cone glass small lens high soft edge glass		
luminous flux:	perfect color	26 W	1610 lm
	high flux	26 W	2200 lm

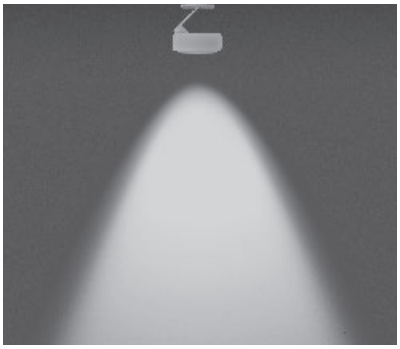



S 40 soft
scattered light with soft contour beam angle (approx. 40°)

inserts:	cone glass small lens medium fresnel lens		
luminous flux:	perfect color	26 W	1600 lm
	high flux	26 W	2190 lm

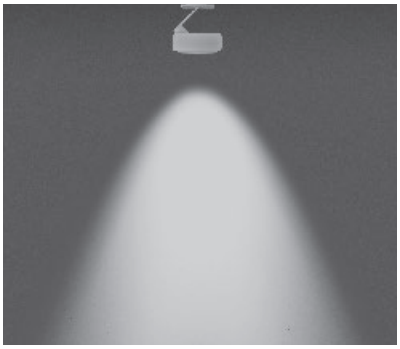



S 30 soft
scattered light with soft contour beam angle (approx. 30°)

inserts:	cone glass small lens high fresnel lens		
luminous flux:	perfect color	26 W	1560 lm
	high flux	26 W	2130 lm