


Più piano v pro datasheet

LED recessed spotlight (downlight non-tiltable) with magnetically attached covers (round & square) for flush mounting in hollow ceilings or solid ceilings with ceiling box. The spotlight is mounted with a simple tension spring mechanism and requires no screw fittings.

Choice of lens design (Più) or flat cone glass with interior lens (Più R). Version with external power supply unit, connection to power source (driver). Can be dimmed at the installation location with a dimmable power supply unit. Optional inserts allow the lighting effect to be changed at any time with a simple mechanism; dichroic color filters can also be used, Occhio light modules can be exchanged.

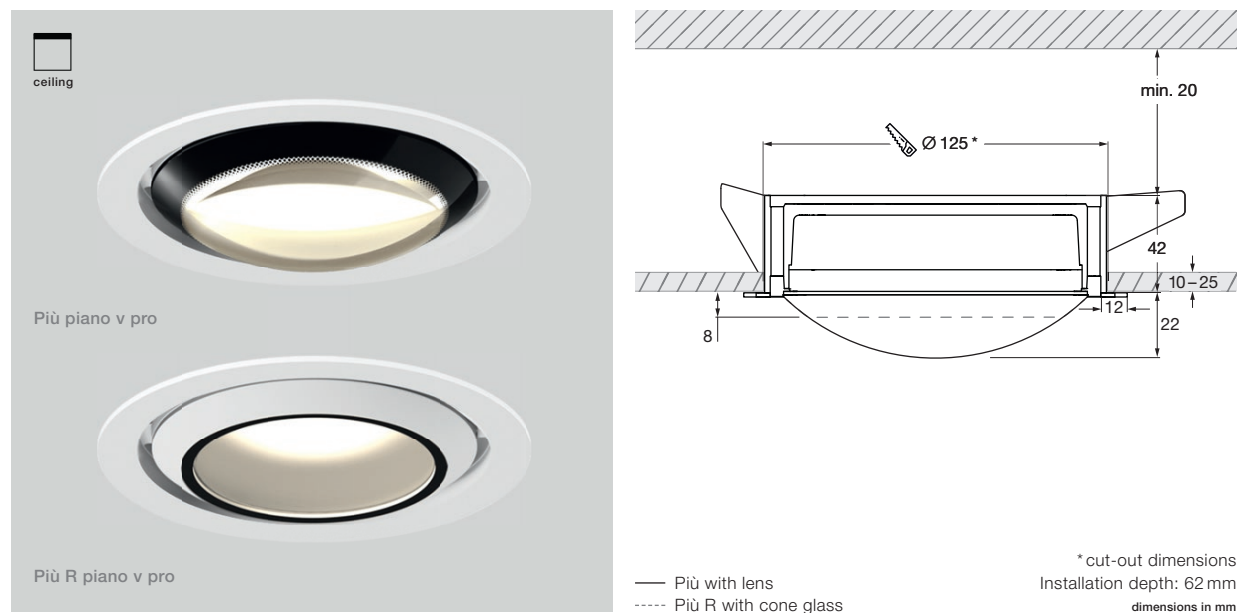


technical data Più piano v pro


properties	material	aluminium, brass, steel – chrome-plated or painted, optical plastic, glass		
	weight	0.8 kg		
surface	head / tube	matt white, matt black		
	lens	matt white, matt black (lens edge)		
	cone glass	rose gold, bronze, shiny chrome, matt chrome, matt white, matt black, phantom, black phantom		
	cover	matt gold, rose gold, bronze, shiny chrome, matt chrome, glossy white, matt white, matt black, phantom, black phantom		
Occhio light module	average life time	> 50.000 hrs		
	energy efficiency class (luminous efficiency)	G (69 lm / W)		
	power	LED 26 W		
	color rendering index	perfect color; CRI Ra 97	high flux; CRI Ra 85	
	color temperature	2700 K, 3000 K, 4000 K	3000 K, 3500 K, 4000 K	
electricity	dimming	with suitable power supply unit		
	power supply unit	max. 700 mA const. / > 36 VDC		
	permitted operating conditions	max. 30°C for indoor use only		

Più piano v pro


Più piano v pro
head H38 mm, ϕ 125 mm




mounting tube with cover



hollow ceiling



concrete ceiling
(Kaiser HaloX 250 with mineral-fibre board)
driver max. L 210 mm x W 30 mm



cover



* cut-out dimensions

Più piano v pro overview optics

Più	C 80	S 100	S 80	S 60	S 40	S 30
small lens low						
small lens medium						
satinised glass						
soft edge glass						
fresnel lens						
color filter (optional)						
lens						

Più R	B	C 100	C 80	S 100	S 80	S 60	S 40	S 30
small lens low								
small lens medium								
small lens high								
satinised glass								
soft edge glass								
fresnel lens								
color filter (optional)								
cone glass								
	diffus	100°, contour	80°, contour	100°, soft	80°, soft	60°, soft	40°, soft	30°, soft



Più piano v pro
Più lighting effects

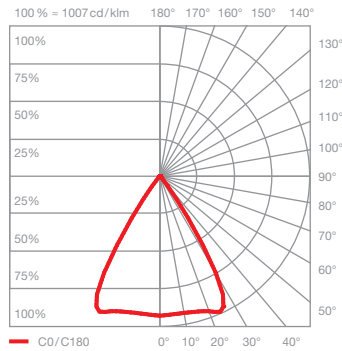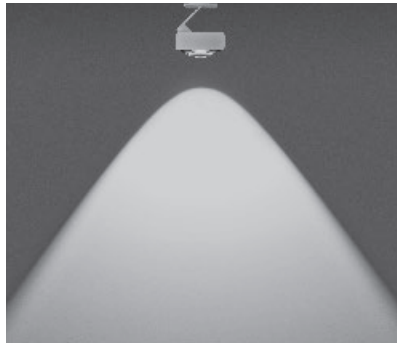

C 80 contour
scattered light with contour beam angle
(approx. 80°)

inserts: lens



luminous flux: perfect color 26 W 1640 lm
high flux 26 W 2240 lm

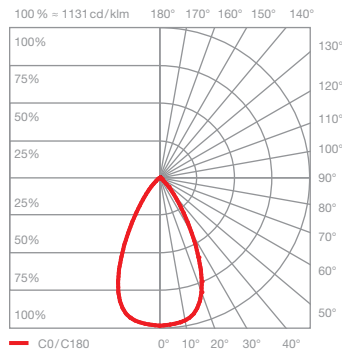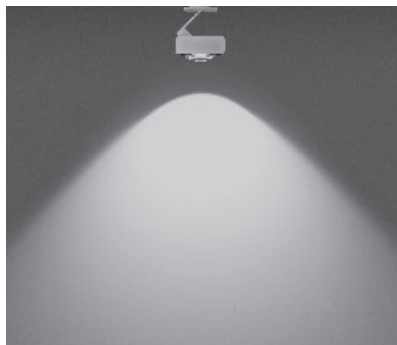

S 100 soft
scattered light with soft contour beam angle
(approx. 100°)

inserts: lens
satinised glass



luminous flux: perfect color 26 W 1260 lm
high flux 26 W 1720 lm

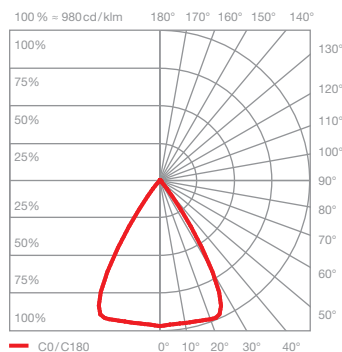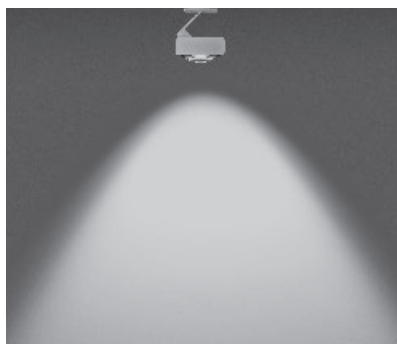

S 80 soft
scattered light with soft contour beam angle
(approx. 80°)

inserts: lens
soft edge glass

luminous flux: perfect color 26 W 1420 lm
high flux 26 W 1930 lm

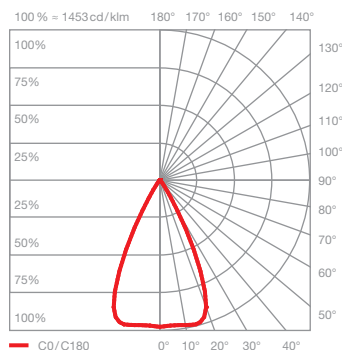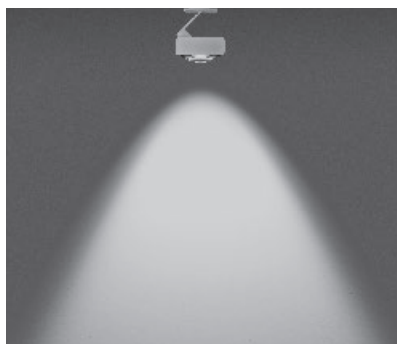


S 60 soft
scattered light with soft contour beam angle
(approx. 60°)

inserts: lens
small lens low
soft edge glass

luminous flux: perfect color 26 W 1610 lm
high flux 26 W 2200 lm

Più piano v pro
Più lighting effects

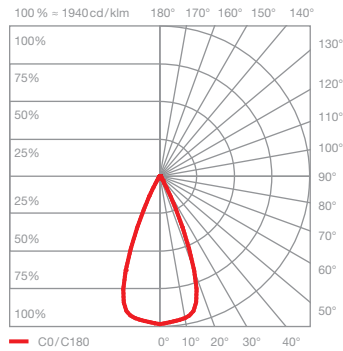


S40 soft

scattered light with soft contour beam angle (approx. 40°)

inserts: lens
small lens medium
soft edge glass

luminous flux: perfect color 26W 1680lm
high flux 26W 2300lm

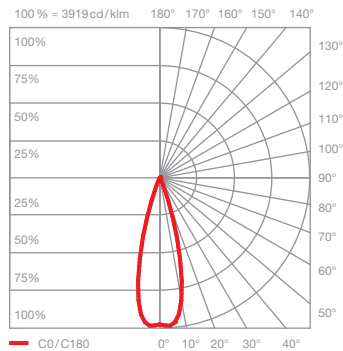


S30 soft

scattered light with soft contour beam angle (approx. 30°)

inserts: lens
small lens medium
fresnel lens

luminous flux: perfect color 26W 1650lm
high flux 26W 2250lm



Più piano v pro Più R lighting effects

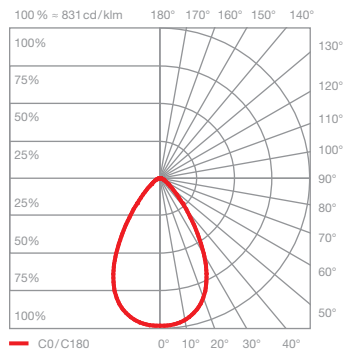

B diffus diffused light

inserts: cone glass
small lens low
satinised glass



luminous flux: perfect color 26W 1370lm
high flux 26W 1870lm

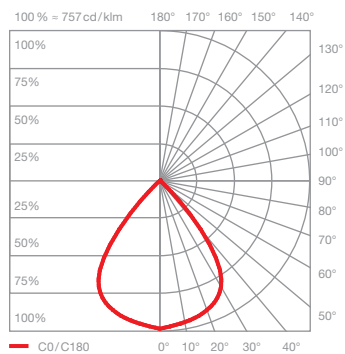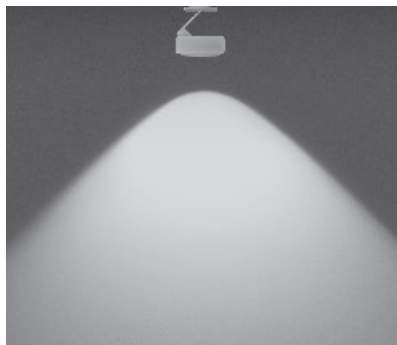

C 100 contour scattered light with contour beam angle (approx. 100°)

inserts: cone glass
small lens low



luminous flux: perfect color 26W 1680lm
high flux 26W 2290lm

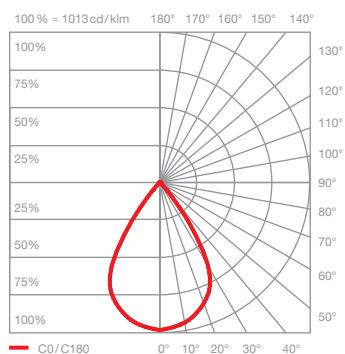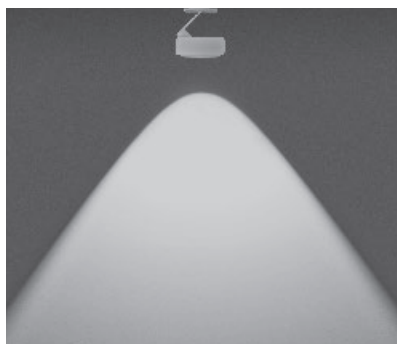

C 80 contour scattered light with contour beam angle (approx. 80°)

inserts: cone glass
small lens medium

luminous flux: perfect color 26W 1810lm
high flux 26W 2460lm

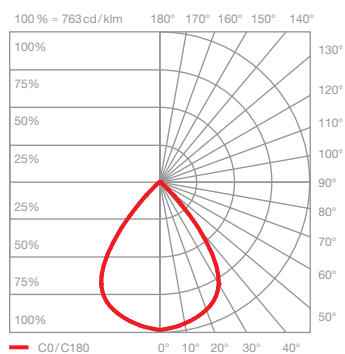
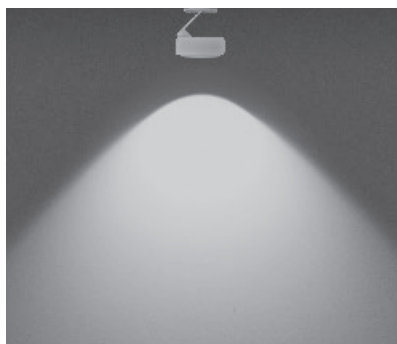


S 100 soft scattered light with soft contour beam angle (approx. 100°)

inserts: cone glass
small lens low
soft edge glass

luminous flux: perfect color 26W 1520lm
high flux 26W 2070lm



Più piano v pro Più R lighting effects

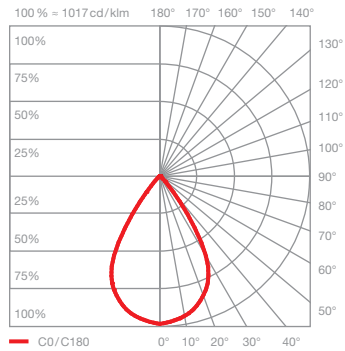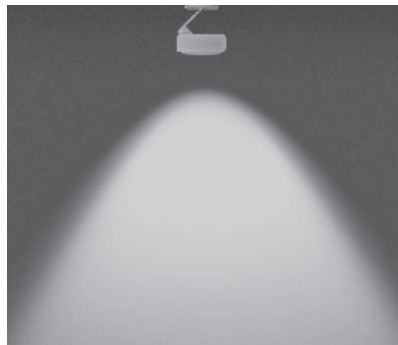

S80 soft
scattered light with soft contour beam angle
(approx. 80°)

inserts: cone glass
small lens medium
soft edge glass



luminous flux: perfect color 26W 1690lm
high flux 26W 2310lm

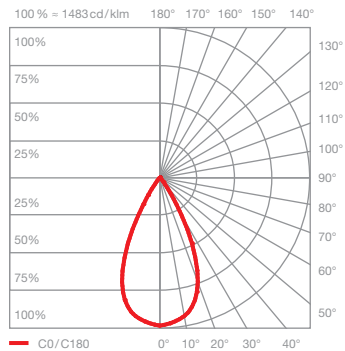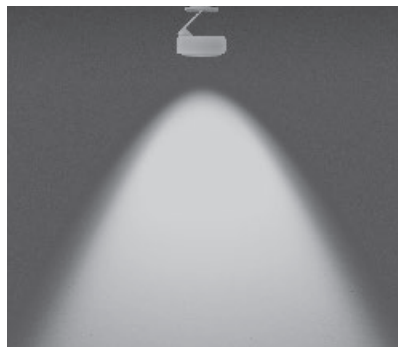

S60 soft
scattered light with soft contour beam angle
(approx. 60°)

inserts: cone glass
small lens high
soft edge glass


luminous flux: perfect color 26W 1610lm
high flux 26W 2200lm

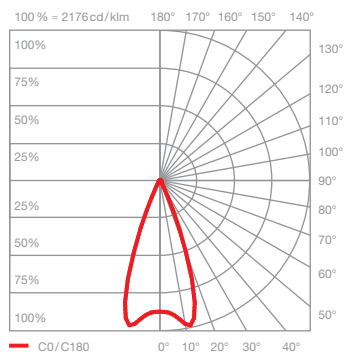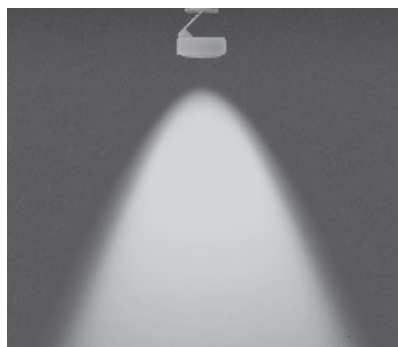

S40 soft
scattered light with soft contour beam angle
(approx. 40°)

inserts: cone glass
small lens medium
fresnel lens

luminous flux: perfect color 26W 1600lm
high flux 26W 2190lm

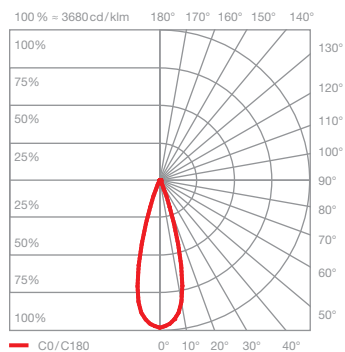

S30 soft
scattered light with soft contour beam angle
(approx. 30°)

inserts: cone glass
small lens high
fresnel lens

luminous flux: perfect color 26W 1560lm
high flux 26W 2130lm