


## Sento filo track DALI pro datasheet

LED ceiling luminaire with track housing and integrated power supply (driver) for track. Modular LED head-body-system allows free combination of different surfaces of head, body and base. Removable head for configuration and maintenance purposes, LED changeable. Heads available with one sided or double sided light output, power of light source 26W.

Lighting effect changeable by using optional inserts, dichroic color filters can be added. Adjustment via heat-decoupled carbon pin (fixation of head against rotation optional). External dimmable via DALI.



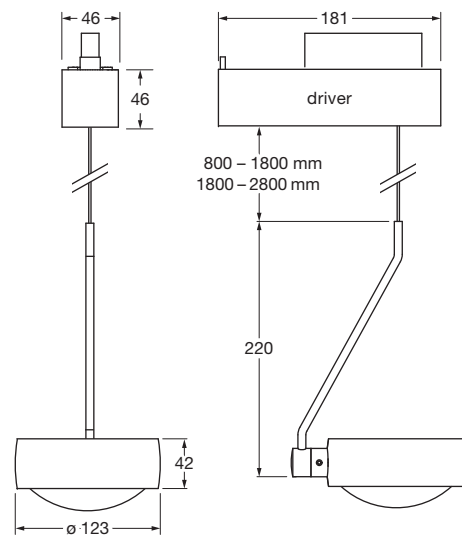












































dimensions in mm

### technical data Sento filo track DALI pro


properties	material	aluminium, steel chrome-plated, painted or anodised, plastic, glass, optical plastic		
	length	800 – 1800 mm / 1800 – 2800 mm		
	rotation head	360°		
	movability body	360°		
	weight	1.6 kg		
surface	head	matt gold, rose gold, bronze, shiny chrome, matt chrome, glossy white, matt white, matt black, phantom, black phantom		
	body	matt white, matt black, shiny chrome, matt chrome		
	track housing	shiny chrome, glossy white, matt chrome, matt white, matt black		
Occhio LED	average life time	> 50.000 hrs		
	energy efficiency class (luminous efficiency)	G (head single sided 66 lm / W, head double sided 73 lm / W)		
	power	LED 26 W		
	color rendering index	perfect color; CRI Ra 97	high flux; CRI Ra 85	
	color temperature	2700, 3000 K	3000, 3500, 4000 K	
electricity	dimming	external via DALI		
	power supply unit	integrated, for use with 230 V AC		
	permitted operating conditions	max. 30°C for indoor use only		

## Sento filo track DALI pro overview inserts

single-sided head				
spot lens				
satinised glass (optional)				
soft edge glass (optional)				
fresnel lens				
color filter (optional, power of light source max. 18 W)				
diffuser glass				
lens				
				
	<b>Sento B</b>	<b>Sento C</b>	<b>Sento S30</b>	<b>Sento S40</b>
lens				
diffuser glass				
color filter (optional, power of light source max. 18 W)				
soft edge glass (optional)				
satinised glass (optional)				
double-sided head				
satinised glass (optional)				
soft edge glass (optional)				
color filter (optional, power of light source max. 18 W)				
diffuser glass				
lens				
				
		<b>Sento A</b>	<b>Sento D</b>	<b>Sento E</b>

## Sento filo track DALI pro lighting effects

 head single sided

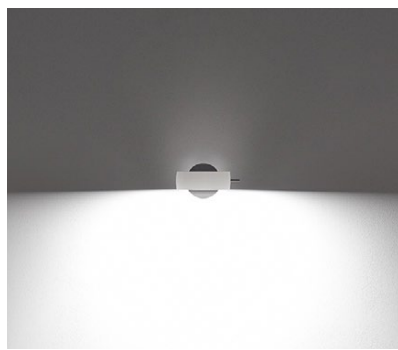

### Sento B

diffuse light

insert: diffusor glass



luminous flux: perfect color 26 W 1370lm  
high flux 26 W 1870lm



### Sento C

directed light  
beam angle approx. 80°


insert: lens  
luminous flux: perfect color 26 W 1570lm  
high flux 26 W 2150lm

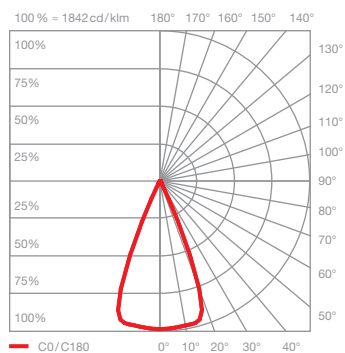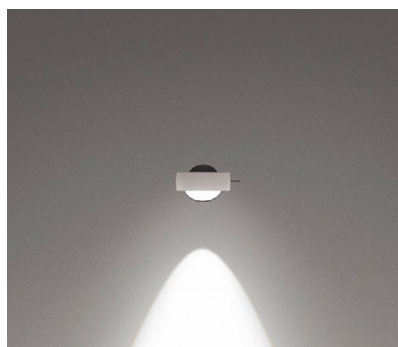

### Sento S40

directed light  
beam angle approx. 40°

insert: spot lens, lens  
soft edge glass  
luminous flux: perfect color 26 W 1560lm  
high flux 26 W 2130lm

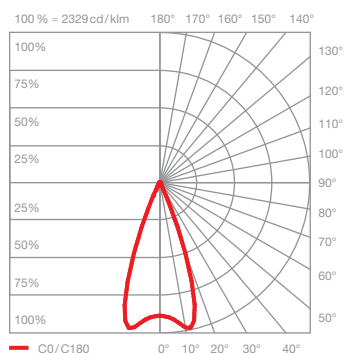


### Sento S30

directed light  
beam angle approx. 30°

insert: spot lens, lens  
fresnel lens  
luminous flux: perfect color 26 W 1530lm  
high flux 26 W 2080lm

## Sento filo track DALI pro lighting effects

 head double sided

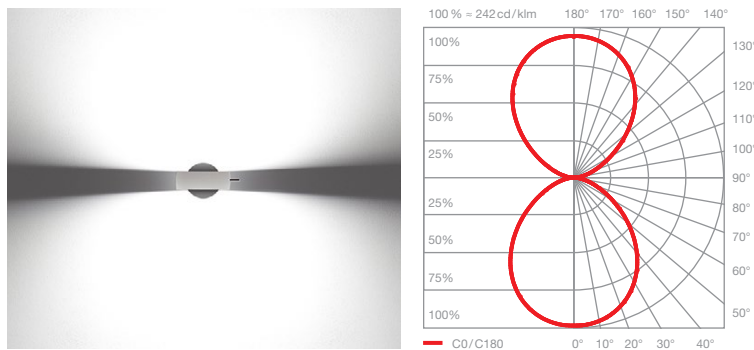


### Sento A

diffuse light in both directions

insert: diffuser glass  
diffuser glass

luminous flux: perfect color 26 W 1500lm  
high flux 26 W 2040lm

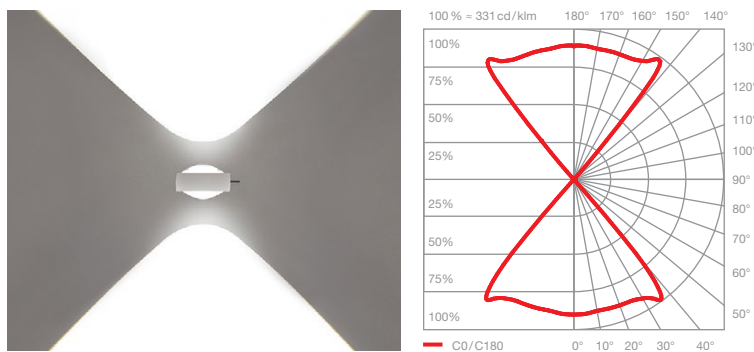


### Sento D

directed light in both directions  
beam angle approx. 80°

insert: lens  
lens

luminous flux: perfect color 26 W 1750lm  
high flux 26 W 2390lm

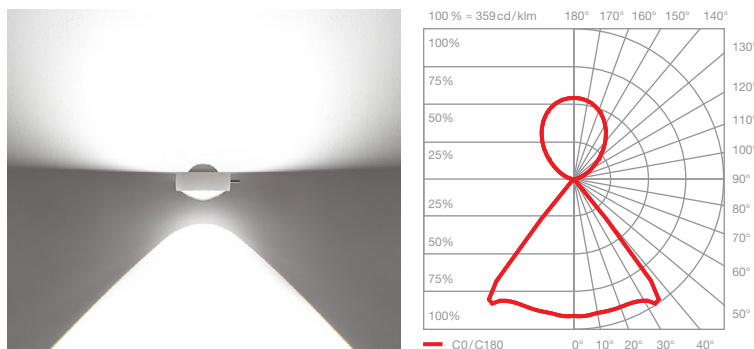

### Sento E

diffuse up light  
directed down light  
beam angle approx. 80°

insert: diffuser glass  
lens

luminous flux: perfect color 26 W 1620lm  
high flux 26 W 2200lm