


## Sento parete doppio flat pro datasheet

LED wall mounted luminaire with a flat base for mounting on cavity box. Connected to a remote constant current source (driver). Modular LED head-body-system allows free combination of different surfaces of head, body and base. Head removable for configuration and maintenance purposes, LED changeable. Heads available with one sided or double sided light output, power of light source 26 W.





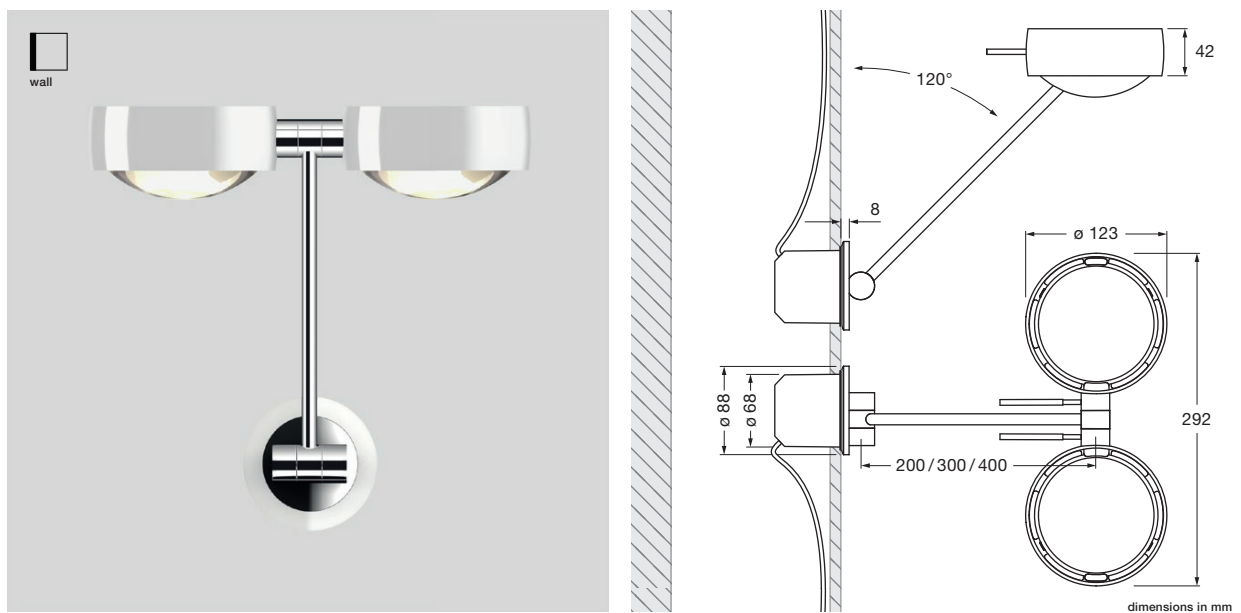








































Lighting effect changeable by using optional inserts, dichroic color filters can be added. Adjustment via heat-decoupled carbon pin (fixation of head against rotation optional). Controllable via external dimmer (depending on the power supply unit).



### technical data Sento parete doppio flat pro



properties	material	aluminium, steel chrome-plated, painted or anodised, plastic, glass, optical plastic
	length	200 / 300 / 400 mm
	rotation head	360°
	swivel range	120°
	weight	2.5 kg
surface	head	matt gold, rose gold, bronze, shiny chrome, matt chrome, glossy white, matt white, matt black, phantom, black phantom
	body	matt white, matt black, shiny chrome, matt chrome
	base	shiny chrome, glossy white, matt chrome, matt white
Occhio LED	average life time	> 50.000 hrs
	energy efficiency class (luminous efficiency)	G (head single sided 66 lm/W, head double sided 73 lm/W)
	power single sided/ double sided	2 x LED 26 W max. 700 mA (> 36 DC) / max. 2 x 350 mA (> 36 DC)
	color rendering index	perfect color; CRI Ra 97      high flux; CRI Ra 85
	color temperature	2700, 3000 K      3000, 3500, 4000 K
electricity	dimming	with trailing edge phase-cut dimmer, push button, DALI or 1-10V (depends on driver)
	power supply unit	remote, driven by constant current source max. 700 mA / > 36 V DC per head
	permitted operating conditions	max. 30°C for indoor use only

## Sento parete doppio flat pro overview inserts

single-sided head				
spot lens				
satinised glass (optional)				
soft edge glass (optional)				
fresnel lens				
color filter (optional, power of light source max. 18 W)				
diffuser glass				
lens				
				
	<b>Sento B</b>	<b>Sento C</b>	<b>Sento S30</b>	<b>Sento S40</b>
lens				
diffuser glass				
color filter (optional, power of light source max. 18 W)				
soft edge glass (optional)				
satinised glass (optional)				
double-sided head				
satinised glass (optional)				
soft edge glass (optional)				
color filter (optional, power of light source max. 18 W)				
diffuser glass				
lens				
				
		<b>Sento A</b>	<b>Sento D</b>	<b>Sento E</b>

## Sento parete doppio flat pro lighting effects

 head single sided

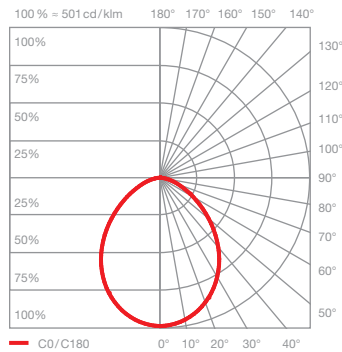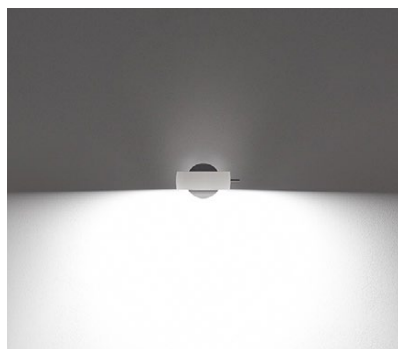


### Sento B

diffuse light

insert: diffusor glass



luminous flux: perfect color 2 x 26 W 1370lm  
high flux 2 x 26 W 1870lm

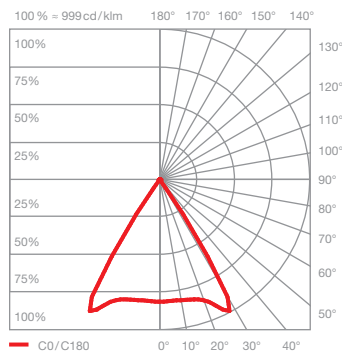

### Sento C

directed light  
beam angle approx. 80°

insert: lens  
luminous flux: perfect color 2 x 26 W 1570lm  
high flux 2 x 26 W 2150lm

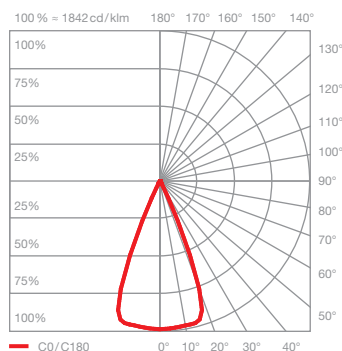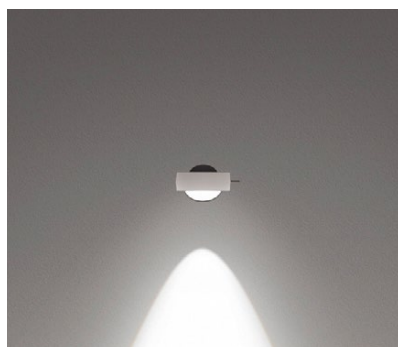


### Sento S40

directed light  
beam angle approx. 40°

insert: spot lens, lens  
soft edge glass

luminous flux: perfect color 2 x 26 W 1560lm  
high flux 2 x 26 W 2130lm

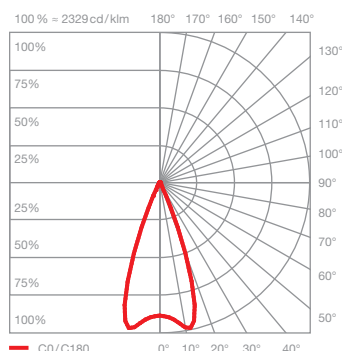

### Sento S30



directed light  
beam angle approx. 30°

insert: spot lens, lens  
fresnel lens

luminous flux: perfect color 2 x 26 W 1530lm  
high flux 2 x 26 W 2080lm

## Sento parete doppio flat pro lighting effects

 head double sided

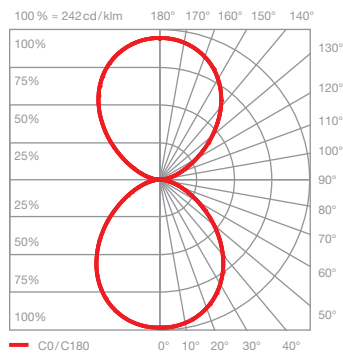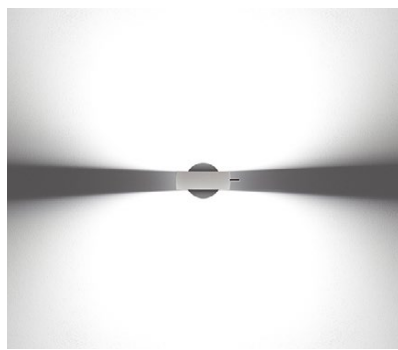


### Sento A

diffuse light in both directions

insert: diffuser glass  
diffuser glass

luminous flux: perfect color 2 x 26 W 1500lm  
high flux 2 x 26 W 2040lm


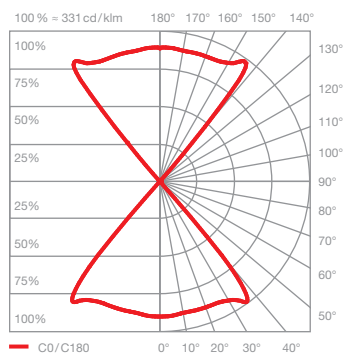


### Sento D

directed light in both directions  
beam angle approx. 80°

insert: lens  
lens

luminous flux: perfect color 2 x 26 W 1750lm  
high flux 2 x 26 W 2390lm

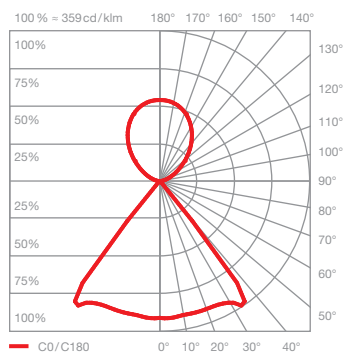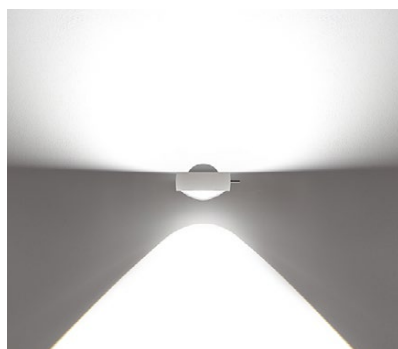

### Sento E

diffuse up light  
directed down light  
beam angle approx. 80°

insert: diffuser glass  
lens

luminous flux: perfect color 2 x 26 W 1620lm  
high flux 2 x 26 W 2200lm