


## Divo soffitto due mains voltage halogen

Ceiling luminaire - modular system consisting of body and head


Thanks to its unique modularity the Occhio head-body system delivers impressive lighting solutions for your room. For different lighting effects diverse, turnable reflector heads are available, which can be easily substituted at any time thanks to a simple plug-in mechanism. The diverse wall and ceiling boxes allow for all recessed and surface mounting options.

Ceiling luminaire Occhio Divo soffitto due consisting of

- |                          |   |
|--------------------------|---|
| body Occhio soffitto due | - different length and surfaces           |
| head Occhio Divo         | - different lighting effects and surfaces |
| Occhio accessories       | - different mounting options and surfaces |

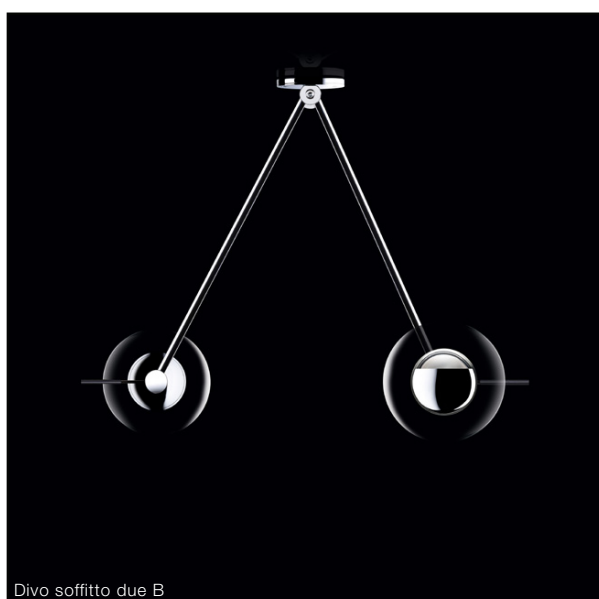

Divo soffitto due B

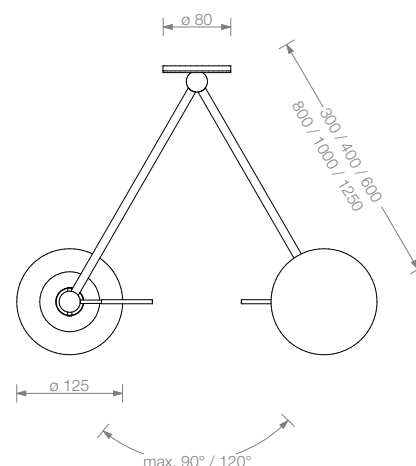

Divo soffitto due B

**material**  
aluminium, brass, steel, glass

**surface**  
head: chrome, matt chrome  
body: chrome, matt chrome

**length / travel**  
30 cm, 40 cm, 60 cm / 120°  
80 cm, 100 cm, 125 cm / 90°

**recommended lighting effect**  
A, B, C, E see p.2 cutsheet

**light source**  
mains voltage halogen, operating voltage 230 V  
2 x 60/70 W, B15d Eco,  
energy efficiency grade D, lifetime 2.000 h



**luminous flux (bulb)**  
60 W / 980 lm, 70 W / 1180 lm

**color temperature / color rendering**  
2900 K / CRI 100

**weight**  
body and reflector head max. 2,5 kg

**mounting accessories**  
for surface or recessed mounting, see p.3 cutsheet

## Divo soffitto due recommended lighting effect

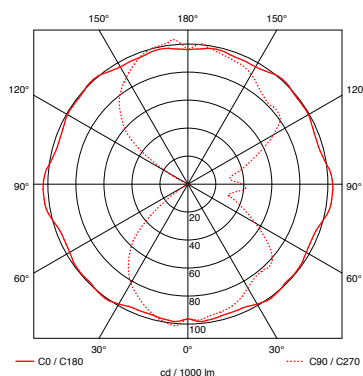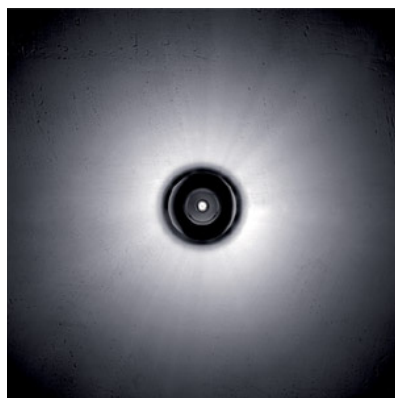

### Divo A

Reflector head for light with open luminaire and radial distribution



with satinised glass, the light output varies compared to the illustrations shown

#### efficiency of reflector head

clear glass 96%  
satinised glass 93%

#### material / surface

clear or satinised, heat-resistant glass  
reflector aluminium  
fixture matt chrome or chrome

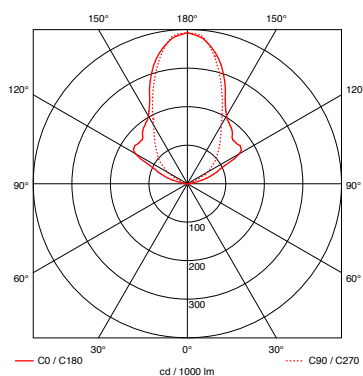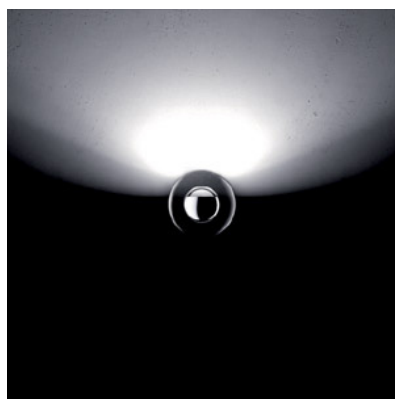

### Divo B

reflector head for light with wide radiation to one side



with satinised glass, the light output varies compared to the illustrations shown

#### efficiency of reflector head

clear glass 69%  
satinised glass 66%

#### material / surface

clear or satinised, heat-resistant glass  
reflector aluminium  
fixture matt chrome or chrome

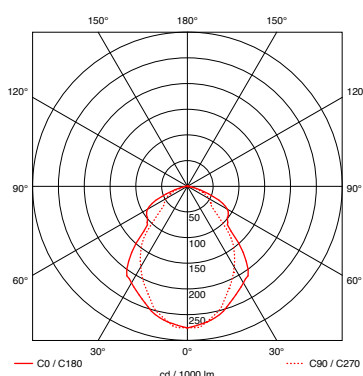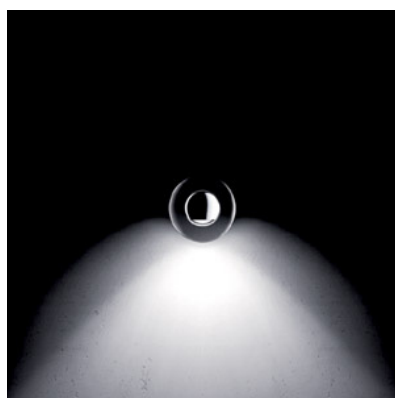

### Divo C

reflector head for light with narrow radiation to one side



with satinised glass, the light output varies compared to the illustrations shown

#### efficiency of reflector head

clear glass 54%  
satinised glass 52%

#### material / surface

clear or satinised, heat-resistant glass  
reflector aluminium  
fixture matt chrome or chrome

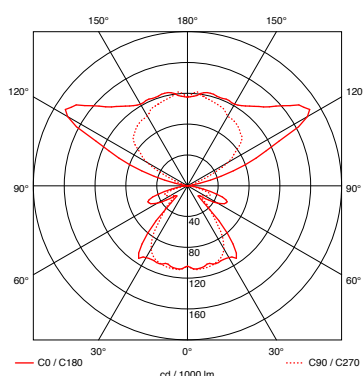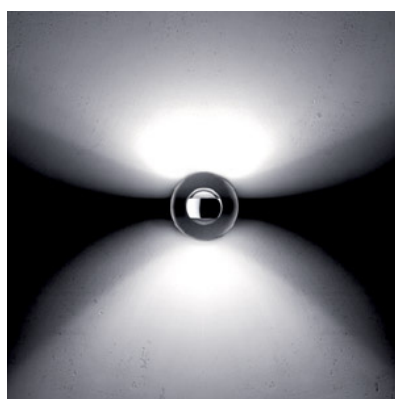

### Divo E

reflector head for light with wide radiation to one and narrow radiation to the other side

with satinised glass the light output varies compared to the illustrations shown

#### efficiency of reflector head

clear glass 79%  
satinised glass 77%

#### material / surface

clear or satinised, heat-resistant glass  
reflector aluminium  
fixture matt chrome or chrome

# cutsheet

# Occhio

3|3

## Divo soffitto due

Item number

Item number  
\_matt chrome M  
\_chrome C

### soffitto due




max. 2 x 70 W  
mains voltage halogen B15d

30 cm	8S 32 00 _
40 cm	8S 33 00 _
60 cm	8S 34 00 _
80 cm	8S 35 00 _
100 cm	8S 36 00 _
125 cm	8S 37 00 _



### Divo A




clear glass

8K 00 A1 M  
8K 00 A1 C

satinised glass

8K 00 A2 M  
8K 00 A2 C

### Divo B




clear glass

8K 00 B1 M  
8K 00 B1 C

satinised glass

8K 00 B2 M  
8K 00 B2 C

### Divo C




clear glass

8K 00 C1 M  
8K 00 C1 C

satinised glass

8K 00 E2 M  
8K 00 E2 C

### Divo E



clear glass


8K 00 E1 M  
8K 00 E1 C

satinised glass

8K 00 E2 M  
8K 00 E2 C




### flat box



for plastering or wall / ceiling box  
h 8 mm, ø 80 mm


8Z 00 00 \_



180° turnable  
h 12 mm, ø 80 mm


8Z 00 01 \_

### spacing box




for surface mounting  
h 22 mm, ø 80 mm

8Z 01 00 \_



with hole for external cable supply  
h 22 mm, ø 80 mm

8Z 03 00 \_



180° turnable  
h 26 mm, ø 80 mm

8Z 01 01 \_