

Divo soffitto singolo low voltage halogen


Ceiling luminaire - modular system consisting of body and head

Thanks to its unique modularity the Occhio head-body system delivers impressive lighting solutions for your room. For different lighting effects diverse, turnable reflector heads are available, which can be easily substituted at any time thanks to a simple plug-in mechanism. The diverse wall and ceiling boxes allow for all recessed and surface mounting options.


Ceiling luminaire Occhio Divo soffitto singolo consisting of

- | | |
|------------------------------|---|
| body Occhio soffitto singolo | - different length and surfaces |
| head Occhio Divo | - different lighting effects and surfaces |
| Occhio accessories | - different mounting options and surfaces |

IP 20

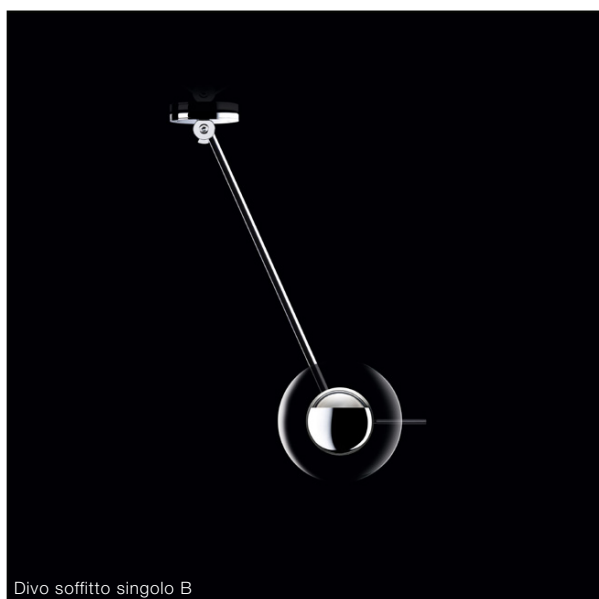

Divo soffitto singolo B

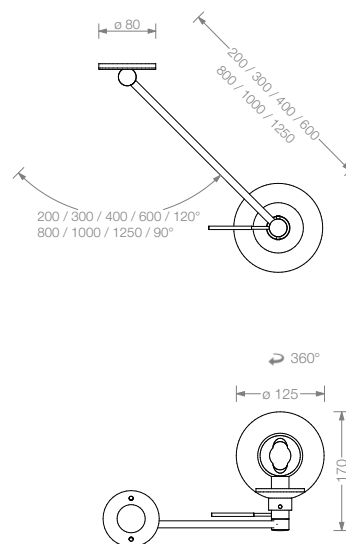

material

aluminium, brass, steel, glass

surface

head: chrome, matt chrome
body: chrome, matt chrome

length / travel

20 cm, 30 cm, 40 cm, 60 cm / 120°
80 cm, 100 cm, 125 cm / 90°

recommended lighting effect

A, B, C, E see p.2 cutsheet

light source

low voltage halogen, operating voltage 12 V
max. 60 W, GY6.35, energy efficiency grade B, lifetime 4.000 h

luminous flux (bulb)

35 W / 860 lm, 50 W / 1180 lm, 60 W / 1650 lm

color temperature / color rendering

3000 K / CRI 100



weight

body and reflector head max. 1,5 kg

mounting accessories

for surface or recessed mounting, see p.4 cutsheet
external transformer necessary

Divo soffitto singolo recommended lighting effects

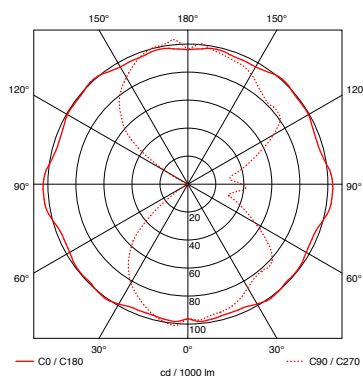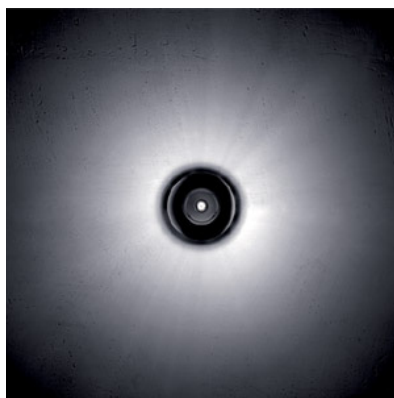

Divo A

Reflector head for light with open luminaire and radial distribution



with satinised glass, the light output varies compared to the illustrations shown

efficiency of reflector head

clear glass 96%
satinised glass 93%

material / surface

clear or satinised, heat-resistant glass
reflector aluminium
fixture matt chrome or chrome

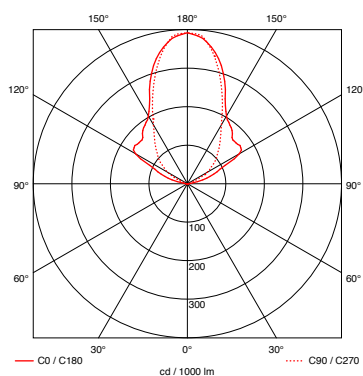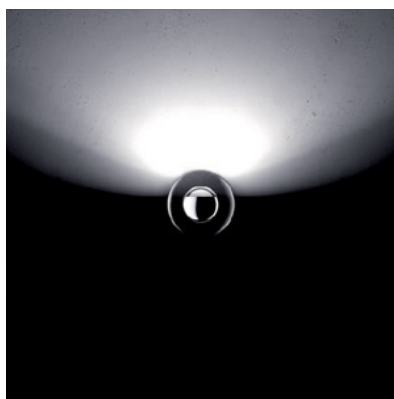

Divo B

reflector head for light with wide radiation to one side


with satinised glass, the light output varies compared to the illustrations shown

efficiency of reflector head

clear glass 69%
satinised glass 66%

material / surface

clear or satinised, heat-resistant glass
reflector aluminium
fixture matt chrome or chrome

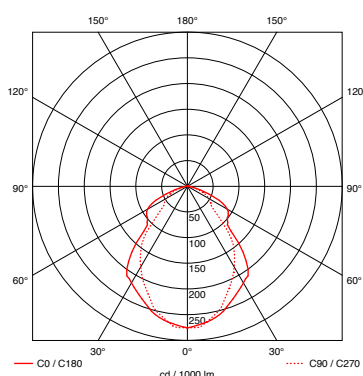

Divo C

reflector head for light with narrow radiation to one side



with satinised glass, the light output varies compared to the illustrations shown

efficiency of reflector head

clear glass 54%
satinised glass 52%

material / surface

clear or satinised, heat-resistant glass
reflector aluminium
fixture matt chrome or chrome

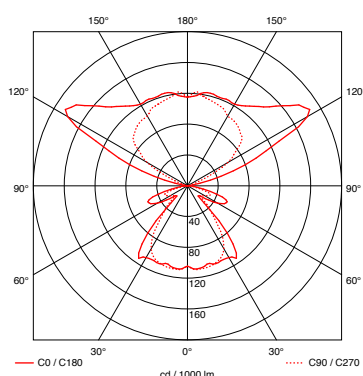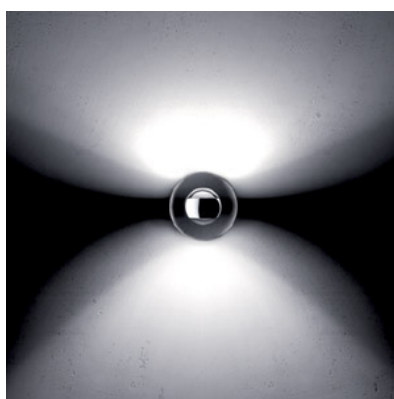

Divo E

reflector head for light with wide radiation to one and narrow radiation to the other side

with satinised glass the light output varies compared to the illustrations shown

efficiency of reflector head

clear glass 79%
satinised glass 77%

material / surface





clear or satinised, heat-resistant glass
reflector aluminium
fixture matt chrome or chrome

Divo soffitto singolo
Item number

Item number
_matt chrome M
_chrome C

soffitto singolo			
		max. 60 W	
		low voltage halogen GY6.35	
	30 cm		7P 12 00 _
	40 cm		7P 13 00 _
	60 cm		7P 14 00 _
	80 cm		7P 15 00 _
	100 cm		7P 16 00 _
	125 cm		7P 17 00 _



Divo A			
		clear glass	8K 00 A1 M
			8K 00 A1 C
		satinised glass	8K 00 A2 M
			8K 00 A2 C
Divo B			
		clear glass	8K 00 B1 M
			8K 00 B1 C
		satinised glass	8K 00 B2 M
			8K 00 B2 C
Divo C			
		clear glass	8K 00 C1 M
			8K 00 C1 C
		satinised glass	8K 00 C2 M
			8K 00 C2 C
Divo E			
		clear glass	8K 00 E1 M
			8K 00 E1 C
		satinised glass	8K 00 E2 M
			8K 00 E2 C




--	--

Divo soffitto singolo
Item number

Item number
_matt chrome M
_chrome C



mounting transformer on site

flat box		
		for plastering or wall / ceiling box h 8 mm, ø 80 mm
Electronic transformer max. 150 W		
		for mounting in cavity walls / ceilings, trailing- or leading-edge dimmable, 50 – 150 W, l 153 mm, w 54 mm, h 36 mm
Electronic transformer max. 105 W		
		for mounting in cavity walls / ceilings, trailing- or leading-edge dimmable, 35 – 105 W, l 107 mm, w 52 mm, h 30 mm
Electronic transformer max. 70 W		
		
		for mounting in flush-mounted boxes (wall / ceiling), not for verticale on ceiling, not for plastering box ceiling, trailing- or leading-edge dimmable, 20 – 70 W, ø 53 mm, h 22 mm



transformer in surface mounted box

Box singolo		
		mounting version incl. electronic transformer 35 – 75 W 176 mm, w 88 mm, h 28 mm
		track version

matt chrome	7Z 40 10 M	F
chrome	7Z 40 10 C	F
bianco / chrome	7Z 40 10 B	F
nero / chrome	7Z 40 10 N	F
matt chrome	4Z 40 10 M	F
chrome	4Z 40 10 C	F
bianco / chrome	4Z 40 10 B	F
nero / chrome	4Z 40 10 N	F