

Divo verticale low voltage halogen

Ceiling luminaire - modular system consisting of body and head

Thanks to its unique modularity the Occhio head-body system delivers impressive lighting solutions for your room. For different lighting effects diverse, turnable reflector heads are available, which can be easily substituted at any time thanks to a simple plug-in mechanism. The diverse wall and ceiling boxes allow for all recessed and surface mounting options.


Ceiling luminaire Occhio Divo verticale consisting of

- body Occhio verticale - different length and surfaces
- head Occhio Divo - different lighting effects and surfaces
- Occhio accessories - different mounting options and surfaces

IP 20     



Divo verticale H



Divo verticale H

material

aluminium, brass, steel, glass

surface

head: chrome, matt chrome
body: chrome, matt chrome

length

20 cm, 30 cm, 40 cm, 60 cm
length including reflector head

recommended lighting effect

A, Fw, G, H see p.2 cutsheet

light source

low voltage halogen, operating voltage 12 V
max. 60 W, GY6.35, energy efficiency grade B, lifetime 4.000 h

luminous flux (bulb)

35 W / 860 lm, 50 W / 1180 lm, 60 W / 1650 lm

color temperature / color rendering

3000 K / CRI 100

weight

body and reflector head max. 0,9 kg



mounting accessories

for surface or recessed mounting, see p.4 cutsheet
external transformer necessary

cutsheet

Occhio

Divo verticale recommended lighting effect

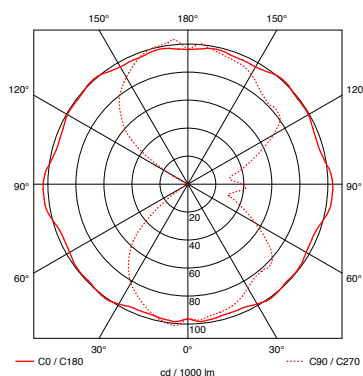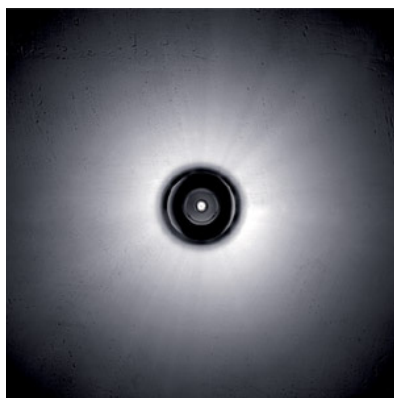

Divo A

Reflector head for light with open luminaire and radial distribution



with satinised glass, the light output varies compared to the illustrations shown

efficiency of reflector head

clear glass 96%
satinised glass 93%

material / surface

clear or satinised, heat-resistant glass
reflector aluminium
fixture matt chrome or chrome

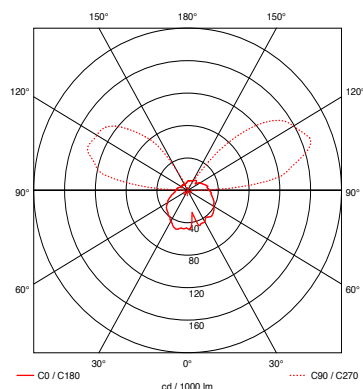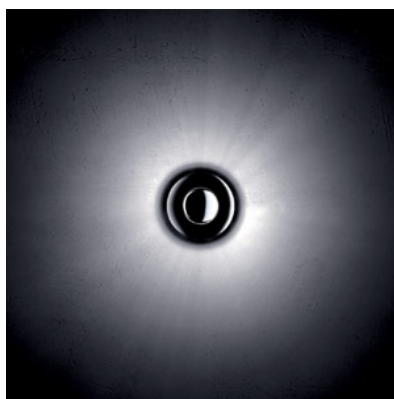

Divo Fw

reflector head for light with wide radiation up


with satinised glass, the light output varies compared to the illustrations shown

efficiency of reflector head

clear glass 63%
satinised glass 61%

material / surface

clear or satinised, heat-resistant glass
reflector aluminium
fixture matt chrome or chrome

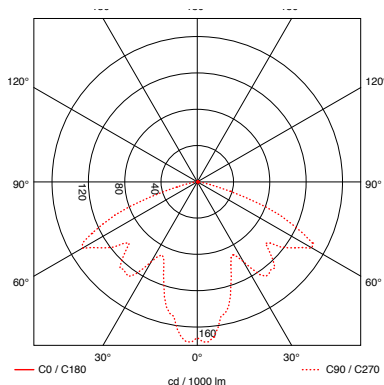

Divo G

reflector head for light with narrow radiation down


with satinised glass, the light output varies compared to the illustrations shown

efficiency of reflector head

clear glass 54%
satinised glass 52%

material / surface

clear or satinised, heat-resistant glass
reflector aluminium
fixture matt chrome or chrome

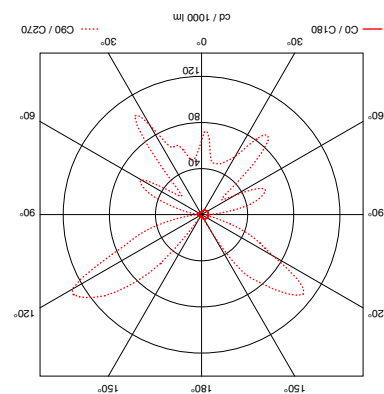

Divo H

reflector head for light with narrow radiation down and wide radiation up

with satinised glass, the light output varies compared to the illustrations shown

efficiency of reflector head

clear glass 57%
satinised glass 54%

material / surface

clear or satinised, heat-resistant glass
reflector aluminium
fixture matt chrome or chrome

cutsheet





Occhio

Divo verticale
Item number

Item number
_matt chrome M
_chrome C

verticale			
	20 cm		30 / 40 / 60 cm
		max. 60 W low voltage halogen GY6.35	
		lengths with reflector heads	
20 cm		7V 11 00 _	
30 cm		7V 12 00 _	
40 cm		7V 13 00 _	
60 cm		7V 14 00 _	



Divo A			
	glass clear		8K 00 A1 M 8K 00 A1 C
	satinised glass		8K 00 A2 M 8K 00 A2 C
Divo Fw			
	glass clear		8K 00 F1 M 8K 00 F1 C
	satinised glass		8K 00 F2 M 8K 00 F2 C
Divo G			
	glass clear		8K 00 G1 M 8K 00 G1 C
	satinised glass		8K 00 G2 M 8K 00 G2 C
Divo H			
	glass clear		8K 00 H1 M 8K 00 H1 C
	satinised glass		8K 00 H2 M 8K 00 H2 C




--	--

Divo verticale
Item number

Item number
_matt chrome M
_chrome C



mounting transformer on site

flat box		
		for plastering or wall / ceiling box h 8 mm, ø 80 mm
		8Z 00 00 M 8Z 00 00 C
Electronic transformer max. 150 W		
		for mounting in cavity walls / ceilings, trailing- or leading-edge dimmable, 50 – 150 W, l 153 mm, w 54 mm, h 36 mm
		7Z 00 03 T
		
Electronic transformer max. 105 W		
		for mounting in cavity walls / ceilings, trailing- or leading-edge dimmable, 35 – 105 W, l 107 mm, w 52 mm, h 30 mm
		7Z 00 01 T
		
Electronic transformer max. 70 W		
		for mounting in flush-mounted boxes (wall / ceiling), not for verticale on ceiling, not for plastering box ceiling, trailing- or leading-edge dimmable, 20 – 70 W, ø 53 mm, h 22 mm
		7Z 00 02 T



transformer in surface mounted box

Box singolo			
		mounting version incl. electronic transformer 35 – 75 W 176 mm, w 88 mm, h 28 mm	
			matt chrome 7Z 40 10 M F chrome 7Z 40 10 C F bianco / chrome 7Z 40 10 B F nero / chrome 7Z 40 10 N F
		track version	
			matt chrome 4Z 40 10 M F chrome 4Z 40 10 C F bianco / chrome 4Z 40 10 B F nero / chrome 4Z 40 10 N F