

cutsheet

Occhio

1 | 3


Divo lettura low voltage halogen


Floor luminaire - modular system consisting of body and head

Thanks to its unique modularity the Occhio head-body system delivers impressive lighting solutions for your room. For different lighting effects diverse, turnable reflector heads are available, which can be easily substituted at any time thanks to a simple plug-in mechanism. The diverse wall and ceiling boxes allow for all recessed and surface mounting options.

Floor luminaire Occhio Divo lettura consisting of

- body Occhio lettura - different length and surfaces
- head Occhio Divo - different lighting effects and surfaces

IP 20     

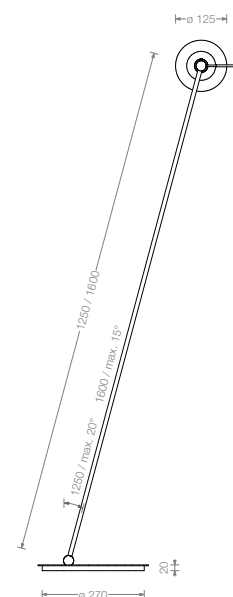

material
aluminium, brass, steel, glass

surface
head: chrome, matt chrome
body: chrome, matt chrome
base: chrome, matt chrome, black or white high gloss surface (bianco, nero), matt black surface

length / travel
125 cm / 20°, 160 cm / 15°, base optional 360° rotatable

recommended lighting effect
B, C, E see p.2 cutsheet

light source
low voltage halogen, operating voltage 12 V
max. 60 W, GY6.35, energy efficiency grade B, lifetime 4.000 h


luminous flux (bulb)
60 W / 1650 lm

color temperature / color rendering
3000 K / CRI 100

weight
body and reflector head max. 7,5 kg

interface
Rocker switch element with dimmer and trafo,
optional for dimming or touchdimming the luminaire

Divo lettura recommended lighting effect

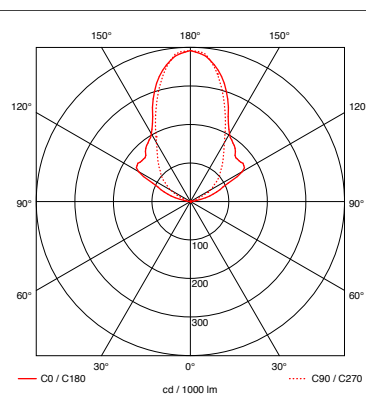

Divo B
reflector head for light with wide radiation to one side


with satinised glass, the light output varies compared to the illustrations shown

efficiency of reflector head

clear glass 69%
satinised glass 66%

material / surface

clear or satinised, heat-resistant glass
reflector aluminium
fixture matt chrome or chrome

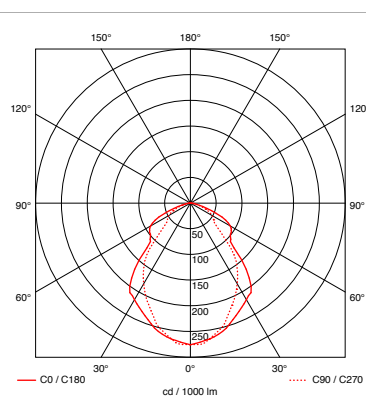

Divo C
reflector head for light with narrow radiation to one side



with satinised glass, the light output varies compared to the illustrations shown

efficiency of reflector head

clear glass 54%
satinised glass 52%

material / surface

clear or satinised, heat-resistant glass
reflector aluminium
fixture matt chrome or chrome

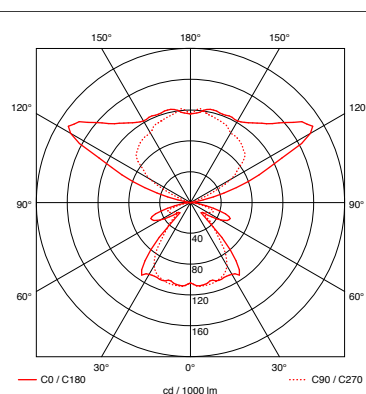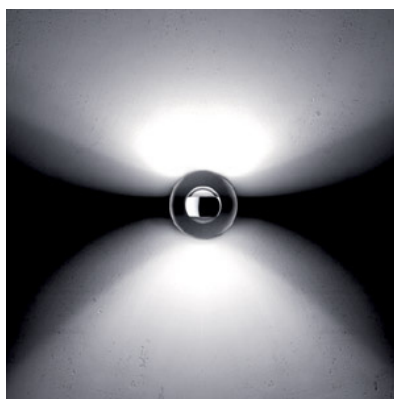

Divo E
reflector head for light with wide radiation to one and narrow radiation to the other side

with satinised glass the light output varies compared to the illustrations shown

efficiency of reflector head

clear glass 79%
satinised glass 77%

material / surface

clear or satinised, heat-resistant glass
reflector aluminium
fixture matt chrome or chrome


Divo lettura

Item numbers

Base surface
(cover changeable)

item number
_matt chrome M
_chrome C

lettura

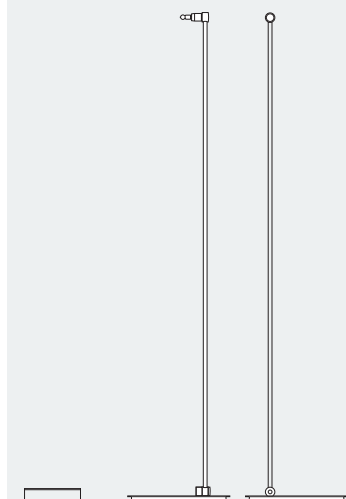

max. 60 W low voltage halogen
GY6.35, Occhio controller NV
(rocker switch) incl. bulb 60 W IRC,
height 160 cm, ø base 27 cm

160 cm version with turnable base

max. 60 W low voltage halogen
GY6.35, Occhio controller NV
(rocker switch) incl. bulb 60 W Eco,
height 125 cm, ø base 27 cm

125 cm version with turnable base

matt black	7L 78 00 MS F
matt chrome	7L 78 00 MM F
chrome	7L 78 00 CC F
bianco	7L 78 00 CB F
nero	7L 78 00 CN F


matt black	7L 78 00 MS T
matt chrome	7L 78 00 MM T
chrome	7L 78 00 CC T
bianco	7L 78 00 CB T
nero	7L 78 00 CN T

matt black	7L 77 00 MS F
matt chrome	7L 77 00 MM F
chrome	7L 77 00 CC F
bianco	7L 77 00 CB F
nero	7L 77 00 CN F

matt black	7L 77 00 MS T
matt chrome	7L 77 00 MM T
chrome	7L 77 00 CC T
bianco	7L 77 00 CB T
nero	7L 77 00 CN T



Divo B




clear glass

8K 00 B1 M
8K 00 B1 C

satinsed glass

8K 00 B2 M
8K 00 B2 C

Divo C




clear glass

8K 00 C1 M
8K 00 C1 C

satinsed glass

8K 00 C2 M
8K 00 C2 C

Divo E



clear glass

8K 00 E1 M
8K 00 E1 C

satinsed glass

8K 00 E2 M
8K 00 E2 C



Occhio sensorpad optional



pluggable into Occhio controller NV,
ø 45 mm, length of cable 180 cm

7L 70 01 M
7L 70 01 C