

cutsheet

Occhio

1 | 3

Divo stilo low voltage halogen


Floor luminaire - modular system consisting of body and head

Thanks to its unique modularity the Occhio head-body system delivers impressive lighting solutions for your room. For different lighting effects diverse, turnable reflector heads are available, which can be easily substituted at any time thanks to a simple plug-in mechanism. The diverse wall and ceiling boxes allow for all recessed and surface mounting options.


Floor luminaire Occhio Divo stilo consisting of

- body Occhio stilo - different length and surfaces
- head Occhio Divo - different lighting effects and surfaces

IP 20



Divo stilo H

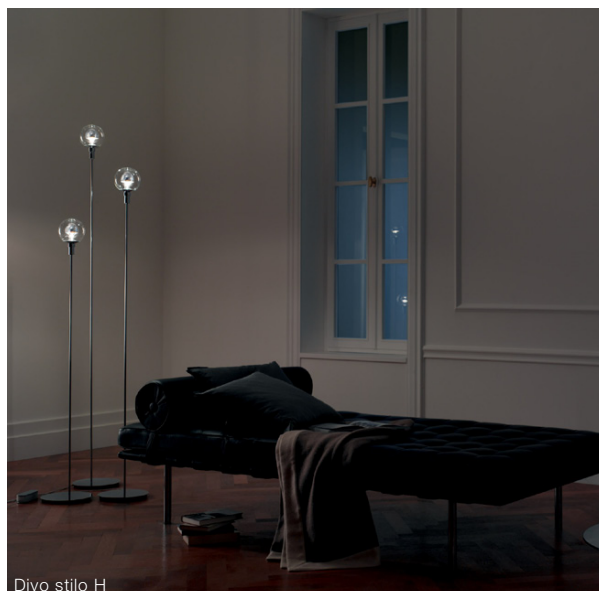

Divo stilo H

material
aluminium, brass, steel, glass

surface
head: chrome, matt chrome
body: chrome, matt chrome
base: chrome, matt chrome, black or white high gloss surface (bianco, nero)

length
135 cm, 160 cm or 185 cm

recommended lighting effect
Fn, G, H see p.2 cutsheet

light source
low voltage halogen, operating voltage 12V
max. 60 W, GY6.35, energy efficiency grade B, lifetime 4.000 h

luminous flux (bulb)
60 W / 1650 lm

color temperature / color rendering
3000 K / CRI 100

weight
body and reflector head max. 6,4 kg

interface
Control element as sensor dimmer and trafo
optional for dimming or touchdimming the lamp

Divo stilo recommended lighting effect



without polar diagram

Divo Fn

reflector head for light with narrow radiation or down



with satinised glass, the light output varies compared to the illustrations shown

efficiency of reflector head

clear glass 96%
satinised glass 93%

material / surface

clear or satinised, heat-resistant glass
reflector aluminium
fixture matt chrome or chrome

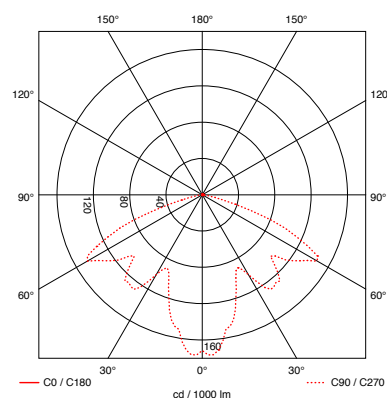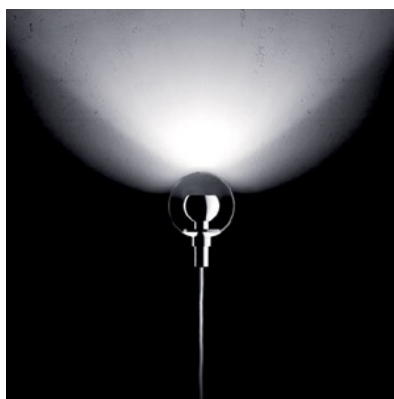

Divo G

reflector head for light with narrow radiation up


with satinised glass, the light output varies compared to the illustrations shown

efficiency of reflector head

clear glass 54%
satinised glass 52%

material / surface

clear or satinised, heat-resistant glass
reflector aluminium
fixture matt chrome or chrome

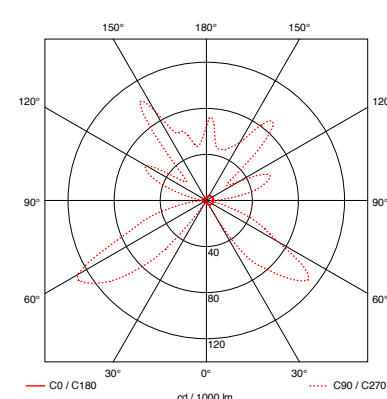

Divo H

reflector head for light with narrow radiation up and wide radiation down

with satinised glass, the light output varies compared to the illustrations shown

efficiency of reflector head

clear glass 57%
satinised glass 54%

material / surface

clear or satinised, heat-resistant glass
reflector aluminium
fixture matt chrome or chrome


cutsheet

Occhio


3 | 3

Divo stilo
Item numbers


item number
_matt chrome M
_chrome C

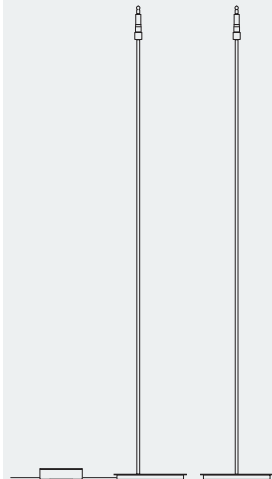stilo 	max. 60 W low voltage halogen GY6.35 Occhio controller NV (rocker switch) incl. bulb 60 W Eco height 135 cm, ø base 24 cm	matt black matt chrome chrome bianco nero	7D 17 00 MS 7D 17 00 MM 7D 17 00 CC 7D 17 00 CB 7D 17 00 CN
	max. 60 W low voltage halogen GY6.35 Occhio controller NV (rocker switch) incl. bulb 60 W Eco height 160 cm, ø base 24 cm	matt black matt chrome chrome bianco nero	7D 18 00 MS 7D 18 00 MM 7D 18 00 CC 7D 18 00 CB 7D 18 00 CN
	max. 60 W low voltage halogen GY6.35 Occhio controller NV (rocker switch) incl. bulb 60 W Eco height 185 cm, ø base 24 cm	matt black matt chrome chrome bianco nero	7D 19 00 MS 7D 19 00 MM 7D 19 00 CC 7D 19 00 CB 7D 19 00 CN
length including reflector head			



Divo Fw 	clear glass	8K 00 N1 M 8K 00 N1 C
	satined glass	8K 00 N2 M 8K 00 N2 C
Divo G 	clear glass	8K 00 G1 M 8K 00 G1 C
	satined glass	8K 00 G2 M 8K 00 G2 C
Divo H 	clear glass	8K 00 H1 M 8K 00 H1 C
	satined glass	8K 00 H2 M 8K 00 H2 C



Occhio sensorpad optional 	pluggable into Occhio controller NV, ø 45 mm, length of cable 180 cm	7L 70 01 M 7L 70 01 C
---	---	--------------------------