

cutsheet

Occhio

1 | 4

Divo sospeso low voltage halogen

Suspended luminaire - modular system consisting of body and head

Thanks to its unique modularity the Occhio head-body system delivers impressive lighting solutions for your room. For different lighting effects diverse, turnable reflector heads are available, which can be easily substituted at any time thanks to a simple plug-in mechanism. The diverse wall and ceiling boxes allow for all recessed and surface mounting options.


Suspended luminaire Occhio Divo sospeso consisting of

- body Occhio sospeso - different surfaces
- head Occhio Divo - different lighting effects and surfaces
- Occhio accessories - different mounting options and surfaces

IP 20     



Divo sospeso H



Divo sospeso H

material
aluminium, brass, steel, glass

surface
head: chrome, matt chrome
body: chrome, matt chrome

length
cable length max. 200 cm

recommended lighting effect
A, Fw, G, H see p.2 cut sheet

light source
low voltage halogen, operating voltage 12 V
max. 60 W, GY6.35
energy efficiency grade B, lifetime 4.000 h



luminous flux (bulb)
35 W / 860 lm, 50 W / 1180 lm, 60 W / 1650 lm

color temperature / color rendering
3000 K / CRI 100

weight
body and reflector head max. 0,8 kg

mounting accessories
for surface or recessed mounting, see p.4 cut sheet
external transformer necessary

Divo sospeso recommended lighting effects

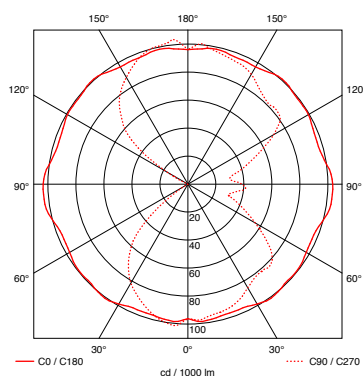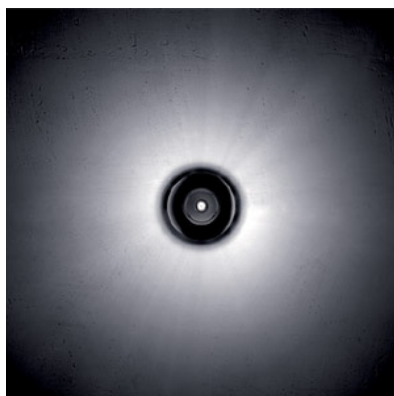

Divo A

Reflector head for light with open luminaire and radial distribution



with satinised glass, the light output varies compared to the illustrations shown

efficiency of reflector head

clear glass 96%
satinised glass 93%

material / surface

clear or satinised, heat-resistant glass
reflector aluminium
fixture matt chrome or chrome

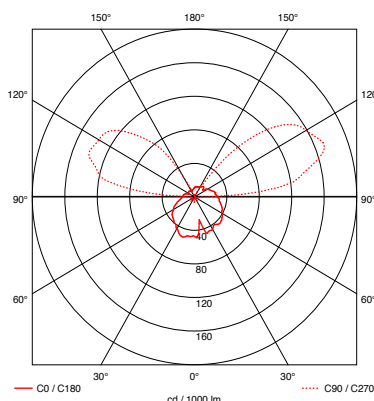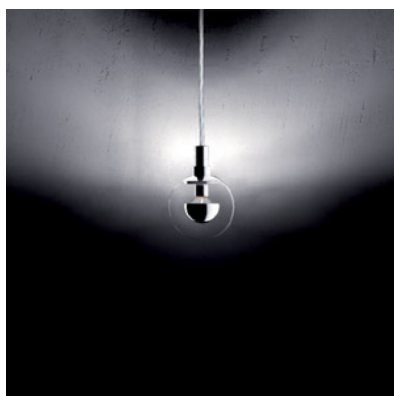

Divo Fw

reflector head for light with wide radiation up


with satinised glass, the light output varies compared to the illustrations shown

efficiency of reflector head

clear glass 63%
satinised glass 61%

material / surface

clear or satinised, heat-resistant glass
reflector aluminium
fixture matt chrome or chrome

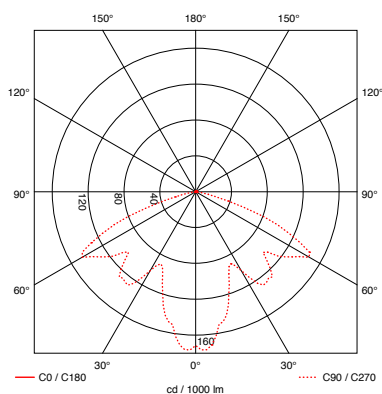

Divo G

reflector head for light with narrow radiation down


with satinised glass, the light output varies compared to the illustrations shown

efficiency of reflector head

clear glass 54%
satinised glass 52%

material / surface

clear or satinised, heat-resistant glass
reflector aluminium
fixture matt chrome or chrome

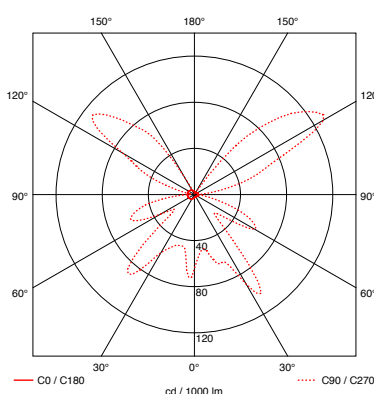

Divo H

reflector head for light with narrow radiation down and wide radiation up

with satinised glass, the light output varies compared to the illustrations shown

efficiency of reflector head

clear glass 57%
satinised glass 54%

material / surface

clear or satinised, heat-resistant glass
reflector aluminium
fixture matt chrome or chrome

Datenblatt

Occhio





3 | 4

Divo sospeso
item numbers

item number
_matt chrome M
_chrome C

sospeso 	max. 60W low voltage halogen GY6.35 excl. bulb, excl. mounting box, cable length 2 m	7E 35 00 _
---	---	------------



Divo A 	clear glass glass satinised	8K 00 A1 M 8K 00 A1 C 8K 00 A2 M 8K 00 A2 C
Divo Fw 	clear glass glass satinised	8K 00 F1 M 8K 00 F1 C 8K 00 F2 M 8K 00 F2 C
Divo G 	clear glass glass satinised	8K 00 G1 M 8K 00 G1 C 8K 00 G2 M 8K 00 G2 C
Divo H 	clear glass glass satinised	8K 00 H1 M 8K 00 H1 C 8K 00 H2 M 8K 00 H2 C




--	--

Divo sospeso
item numbers

item number



mounting transformer on site

flat box 	for plastering or wall / ceiling box h 8 mm, ø 80 mm	8Z 00 00 M 8Z 00 00 C
Electronic transformer max. 150 W 	for mounting in cavity walls / ceilings, trailing- or leading-edge dimmable, 50 – 150 W, l 153 mm, w 54 mm, h 36 mm	7Z 00 03 T
Electronic transformer max. 105 W 	for mounting in cavity walls / ceilings, trailing- or leading-edge dimmable, 35 – 105 W, l 107 mm, w 52 mm, h 30 mm	7Z 00 01 T
Electronic transformer max. 70 W 	for mounting in flush-mounted boxes (wall / ceiling), not for verticale on ceiling, not for plastering box ceiling, trailing- or leading-edge dimmable, 20 – 70 W, ø 53 mm, h 22 mm	7Z 00 02 T



transformer in surface mounted box

Box singolo 	mounting version incl. electronic transformer 35 – 75 W 176 mm, w 88 mm, h 28 mm	matt chrome 7Z 40 10 M F chrome 7Z 40 10 C F bianco / chrome 7Z 40 10 B F nero / chrome 7Z 40 10 N F
	track version	matt chrome 4Z 40 10 M F chrome 4Z 40 10 C F bianco / chrome 4Z 40 10 B F nero / chrome 4Z 40 10 N F