

## Divo letto low voltage halogen



Wall luminaire - modular system consisting of body and head

Thanks to its unique modularity the Occhio head-body system delivers impressive lighting solutions for your room. For different lighting effects diverse, turnable reflector heads are available, which can be easily substituted at any time thanks to a simple plug-in mechanism. The diverse wall and ceiling boxes allow for all recessed and surface mounting options.

Wall luminaire Occhio Divo letto consisting of

- body Occhio letto - different length and surfaces
- head Occhio Divo - different lighting effects and surfaces
- Occhio accessories - different mounting options and surfaces

IP 20     

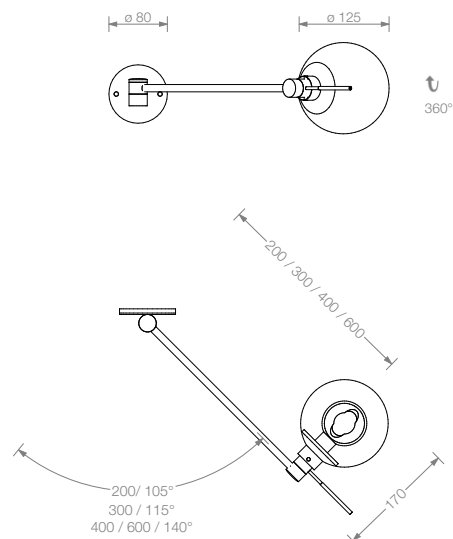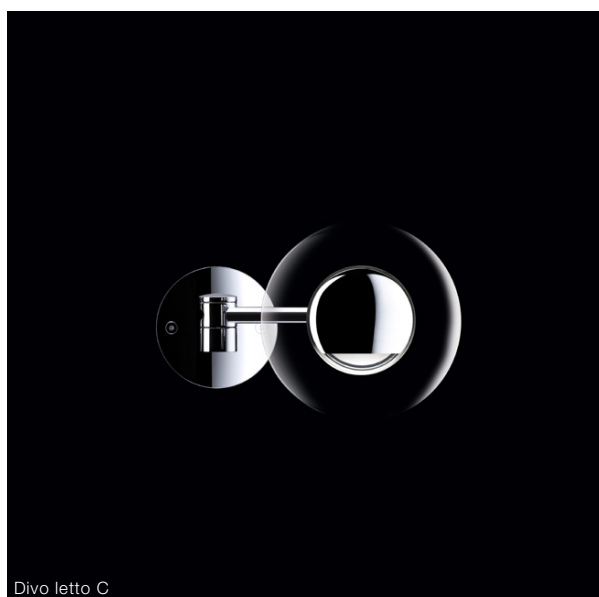

### material

aluminium, brass, steel, glass

### surface

head: chrome, matt chrome  
body: chrome, matt chrome

### length / travel

20 cm / 105°, 30 cm / 115°, 40 cm / 140°, 60 cm / 140°

### recommended lighting effect

B, C, E see p.2 cutsheet

### light source

low voltage halogen, operating voltage 12 V  
max. 60 W, GY6.35  
energy efficiency grade B, lifetime 4.000 h

### luminous flux (bulb)

35 W / 860 lm, 50 W / 1180 lm, 60 W / 1650 lm

### color temperature / color rendering

3000 K / CRI 100


### weight

body and reflector head max. 1,2 kg

### mounting accessories

for surface or recessed mounting, see p.4 cut sheet  
external transformer necessary

## Divo letto recommended lighting effect

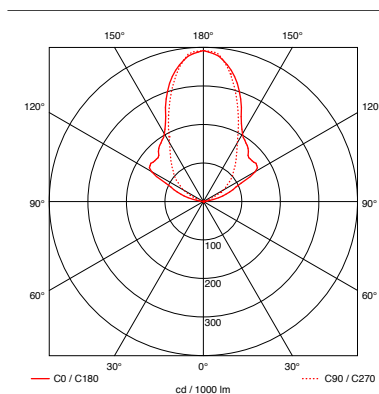

**Divo B**  
reflector head for light with wide radiation to one side


with satinised glass, the light output varies compared to the illustrations shown

### efficiency of reflector head

clear glass 69%  
satinised glass 66%

### material / surface

clear or satinised, heat-resistant glass  
reflector aluminium  
fixture matt chrome or chrome

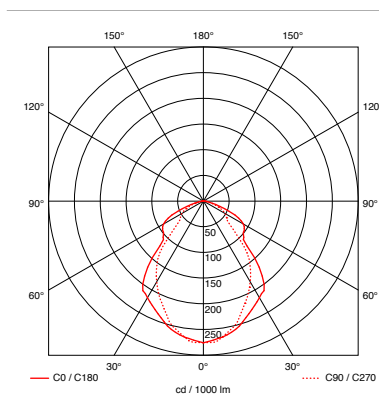

**Divo C**  
reflector head for light with narrow radiation to one side



with satinised glass, the light output varies compared to the illustrations shown

### efficiency of reflector head

clear glass 54%  
satinised glass 52%

### material / surface

clear or satinised, heat-resistant glass  
reflector aluminium  
fixture matt chrome or chrome

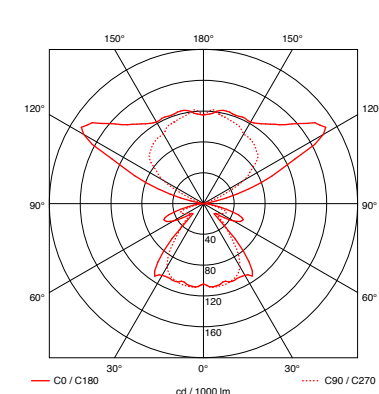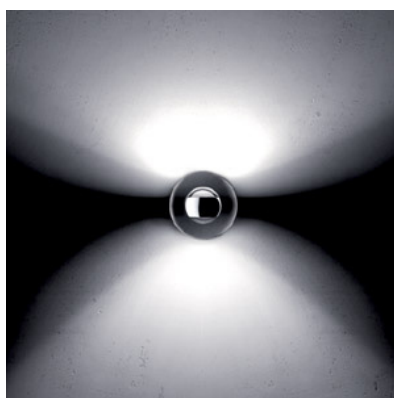

**Divo E**  
reflector head for light with wide radiation to one and narrow radiation to the other side

with satinised glass the light output varies compared to the illustrations shown

### efficiency of reflector head

clear glass 79%  
satinised glass 77%

### material / surface

clear or satinised, heat-resistant glass  
reflector aluminium  
fixture matt chrome or chrome

## cutsheet


# Occhio

3 | 4

Divo letto  
Item numbers LV

Item number  
\_chrome matt M  
\_chrome C

letto




max. 60 W  
low voltage halogen GY6.35

20 cm  
30 cm  
40 cm  
60 cm

7B 11 00 \_ L/R  
7B 12 00 \_ L/R  
7B 13 00 \_ L/R  
7B 14 00 \_ L/R



## Divo B




clear glass

satinised glass

8K 00 B1 M  
8K 00 B1 C

8K 00 B2 M  
8K 00 B2 C

### Divo C




clear glass

satinised glass

8K 00 C1 M  
8K 00 C1 C

8K 00 C2 M  
8K 00 C2 C

Divo E



clear glass

satinised glass

```
8K 00 E1 M
8K 00 E1 C
```

```
8K 00 E2 M
8K 00 E2 C
```



# cutsheet

# Occhio

4 | 4

## Divo letto Item numbers LV

Item number  
\_matt chrome M  
\_chrome C



### mounting transformer on site


#### flat box



for plastering or wall / ceiling box  
h 8 mm, ø 80 mm

8Z 00 00 \_

#### Electronic transformer max. 150 W



for mounting in cavity walls / ceilings,  
trailing- or leading-edge dimmable,  
50 – 150 W,  
l 153 mm, w 54 mm, h 36 mm

7Z 00 03 T

#### Electronic transformer max. 105 W



for mounting in cavity walls / ceilings,  
trailing- or leading-edge dimmable,  
35 – 105 W,  
l 107 mm, w 52 mm, h 30 mm

7Z 00 01 T

#### Electronic transformer max. 70 W



for mounting in flush-mounted boxes (wall / ceiling), not for verticle on ceiling, not for plastering box ceiling, trailing- or leading-edge dimmable, 20 – 70 W, ø 53 mm, h 22 mm

7Z 00 02 T

#### Sensor dimmer



for external mounting, 12V,  
max. 60 W, incl. iso mounting kit

7B 40 06 T

l 151 mm, w 41 mm, h 31 mm



### transformer in surface mounted box

#### Box singolo



mounting version  
incl. electronic transformer  
35 – 75 W  
176 mm, w 88 mm, h 28 mm

matt chrome	7Z 40 10 M	F
chrome	7Z 40 10 C	F
bianco / chrome	7Z 40 10 B	F
nero / chrome	7Z 40 10 N	F



track version

matt chrome	4Z 40 10 M	F
chrome	4Z 40 10 C	F
bianco / chrome	4Z 40 10 B	F
nero / chrome	4Z 40 10 N	F

#### spacing box



with hole for external cable supply  
h 22 mm, ø 80 mm

8Z 03 00 \_

#### Occhio controller



rocker switch with optional sensor  
operation and pad connector, incl. iso mounting kit, for use with spacing box with hole for external cable supply  
cable length 150 / 150 cm,  
l 148 mm, w 45 mm, h 40 mm

7B 40 08 \_

#### Occhio sensorpad



pluggable into Occhio controller NV,  
cable length 180 cm, ø 45 mm

7L 70 01 \_