




Divo parete doppio mains voltage halogen

Wall luminaire - modular system consisting of body and head

Thanks to its unique modularity the Occhio head-body system delivers impressive lighting solutions for your room. For different lighting effects diverse, turnable reflector heads are available, which can be easily substituted at any time thanks to a simple plug-in mechanism. The diverse wall and ceiling boxes allow for all recessed and surface mounting options.

Wall luminaire Occhio Divo parete doppio consisting of

- body Occhio parete doppio - different length and surfaces
- head Occhio Divo - different lighting effects and surfaces
- Occhio accessories - different mounting options and surfaces

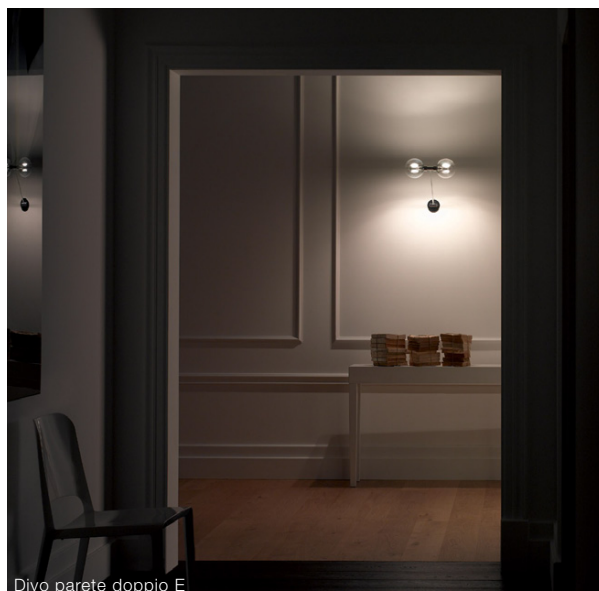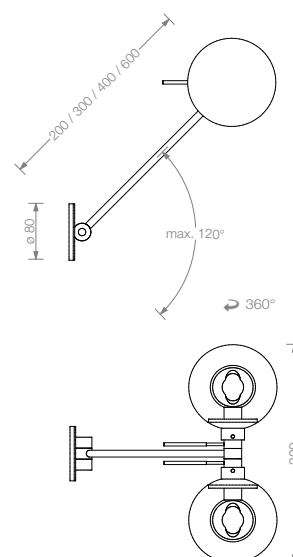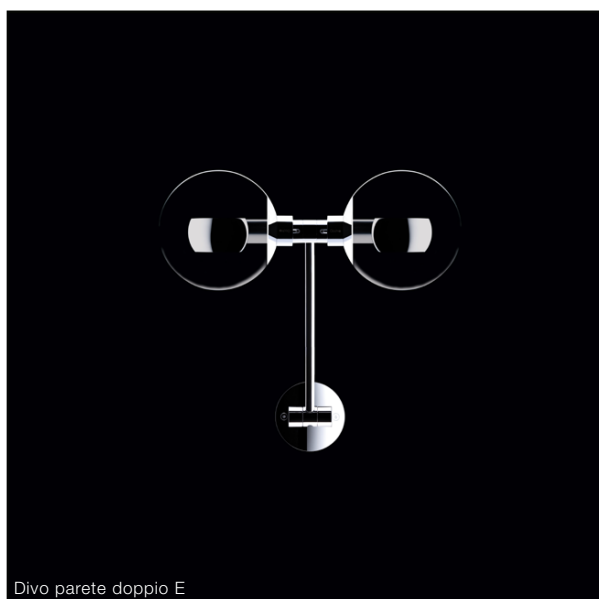

material
aluminium, brass, steel, glass

surface
head: chrome, matt chrome
body: chrome, matt chrome

length / travel
20 cm, 30 cm, 40 cm, 60 cm / 120°

recommended lighting effect
A, B, C, D, E see p.2 and 3 cutsheet

light source
mains voltage halogen, operating voltage 230 V
2 x 60 / 70 W, B15d Eco,
energy efficiency grade D, lifetime 2.000 h



luminous flux (bulb)
60 W / 980 lm, 70 W / 1180 lm

color temperature / color rendering
2900 K / CRI 100

weight
body and reflector head max. 1,5 kg

mounting accessories
for surface or recessed mounting, see p. 5 cutsheet

Divo parete doppio recommended lighting effect

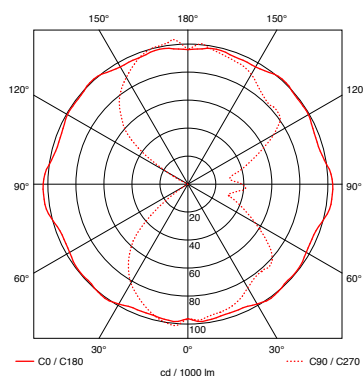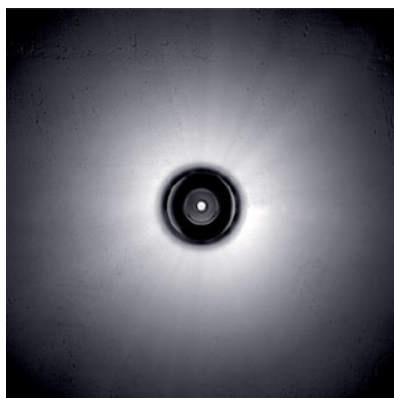

Divo A

Reflector head for spherical light, radial distribution



with satinised glass, the light output varies compared to the illustrations shown

efficiency of reflector head

clear glass 96%
satinised glass 93%

material / surface

clear or satinised, heat-resistant glass
reflector aluminium
fixture matt chrome or chrome

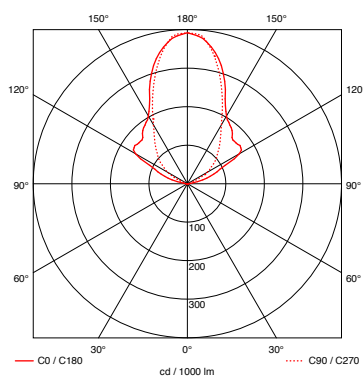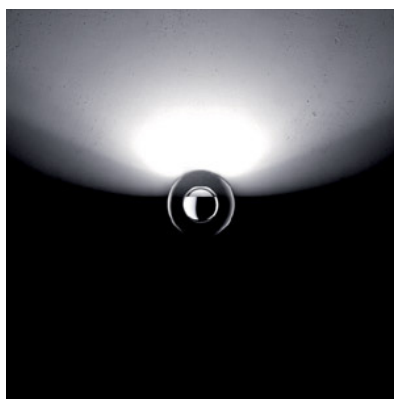

Divo B

reflector head for light with wide radiation to one side


with satinised glass, the light output varies compared to the illustrations shown

efficiency of reflector head

clear glass 69%
satinised glass 66%

material / surface

clear or satinised, heat-resistant glass
reflector aluminium
fixture matt chrome or chrome

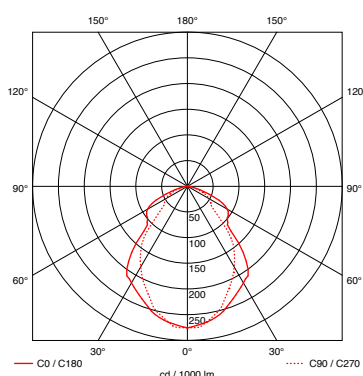

Divo C

reflector head for light with narrow radiation to one side



with satinised glass, the light output varies compared to the illustrations shown

efficiency of reflector head

clear glass 54%
satinised glass 52%

material / surface

clear or satinised, heat-resistant glass
reflector aluminium
fixture matt chrome or chrome

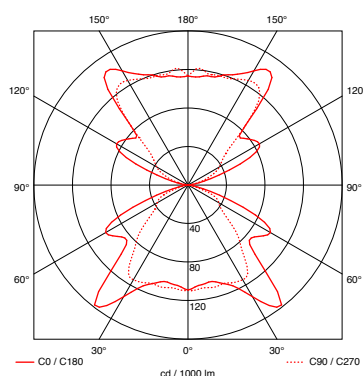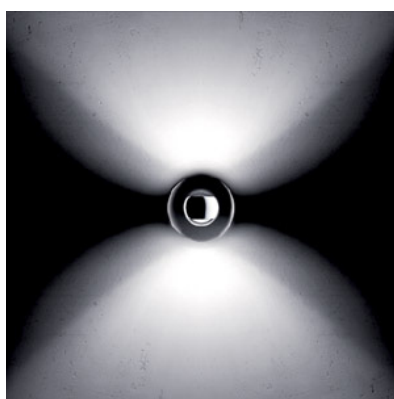

Divo D

reflector head for light with narrow radiation to both sides

with satinised glass, the light output varies compared to the illustrations shown



efficiency of reflector head

clear glass 77%
satinised glass 73%

material / surface

clear or satinised, heat-resistant glass
reflector aluminium
fixture matt chrome or chrome

Divo parete doppio recommended lighting effect

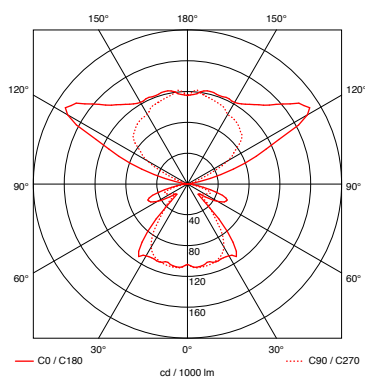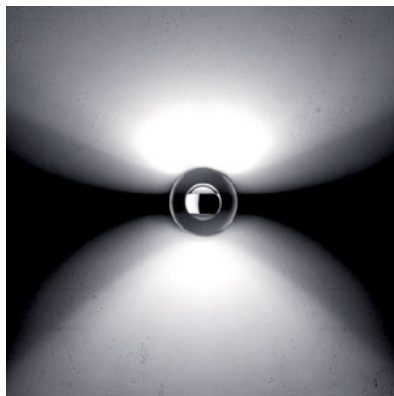

Divo E

reflector head for light with narrow radiation to one and wide radiation to the other side

with satinised glass the light output varies compared to the illustrations shown

efficiency of reflector head

clear glass 79%

satinised glass 77%

material / surface

clear or satinised, heat-resistant glass

reflector aluminium

fixture matt chrome or chrome

cutsheet

Occhio

4 | 5

Divo parete doppio Item numbers

Item number
_matt chrome M
_chrome C

parete doppio




max. 2 x 70 W
mains voltage halogen B15d

20 cm
30 cm
40 cm
60 cm

8P 21 00 _
8P 22 00 _
8P 23 00 _
8P 24 00 _



Divo A




clear glass

8K 00 A1 M
8K 00 A1 C

satinised glass

8K 00 A2 M
8K 00 A2 C

Divo B




clear glass

8K 00 B1 M
8K 00 B1 C

satinised glass

8K 00 B2 M
8K 00 B2 C

Divo C




clear glass

8K 00 C1 M
8K 00 C1 C

satinised glass

8K 00 C2 M
8K 00 C2 C

Divo D




clear glass

8K 00 D1 M
8K 00 D1 C

satinised glass

8K 00 D2 M
8K 00 D2 C

Divo E



clear glass

8K 00 E1 M
8K 00 E1 C

satinised glass

8K 00 E2 M
8K 00 E2 C



Divo parete doppio
Item numbers

Item number
_matt chrome M
_chrome C

flat box			
		for plastering and wall / ceiling box h 8 mm, ø 80 mm	8Z 00 00 _
spacing box			
		for surface mounting h 22 mm, ø 80 mm	8Z 01 00 _
		with hole for external cable supply h 22 mm, ø 80 mm	8Z 03 00 _
		with switch h 22 mm, ø 80 mm	8Z 04 00 _