

Divo verticale low voltage halogen


Wall luminaire - modular system consisting of body and head

Thanks to its unique modularity the Occhio head-body system delivers impressive lighting solutions for your room. For different lighting effects diverse, turnable reflector heads are available, which can be easily substituted at any time thanks to a simple plug-in mechanism. The diverse wall and ceiling boxes allow for all recessed and surface mounting options.


Wall luminaire Occhio Divo verticale consisting of

- body Occhio verticale - different length and surfaces
- head Occhio Divo - different lighting effects and surfaces
- Occhio accessories - different mounting options and surfaces

IP 20     

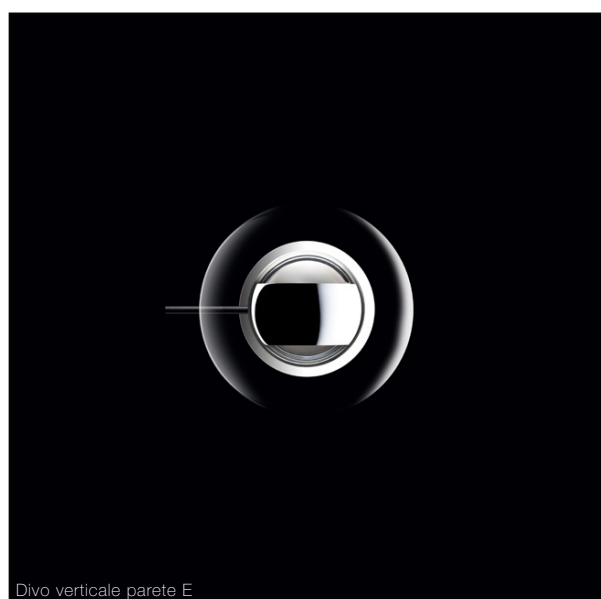

Divo verticale parete E

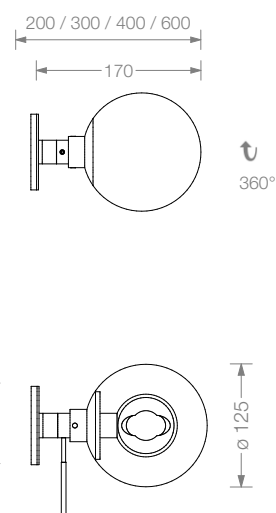

Divo verticale parete E

material

aluminium, brass, steel, glass

surface

head: chrome, matt chrome
body: chrome, matt chrome

length

20 cm, 30 cm, 40 cm, 60 cm
length including reflector head

recommended lighting effect

A, B, C, D, E, Fw see p.2 and p.3 cutsheet

light source

low voltage halogen, operating voltage 12 V
max. 60 W, GY6.35, energy efficiency grade B, lifetime 4.000 h

luminous flux (bulb)

35 W / 860 lm, 50 W / 1180 lm, 60 W / 1650 lm

color temperature / color rendering

3000 K / CRI 100



weight

body and reflector head max. 0,9 kg

mounting accessories

for surface or recessed mounting, see p.5 cutsheet
external transformer necessary

Divo verticale recommended lighting effect

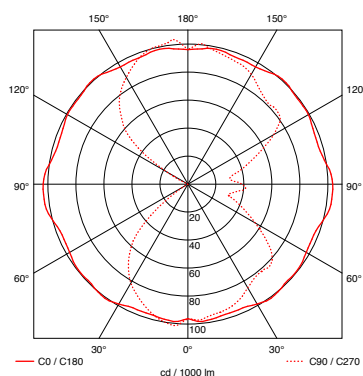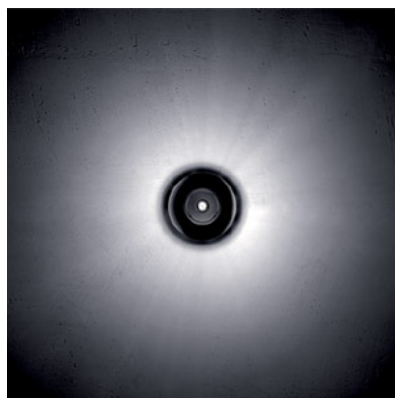

Divo A

Reflector head for light with open luminaire and radial distribution



with satinised glass, the light output varies compared to the illustrations shown

efficiency of reflector head

clear glass 96%
satinised glass 93%

material / surface

clear or satinised, heat-resistant glass
reflector aluminium
fixture matt chrome or chrome

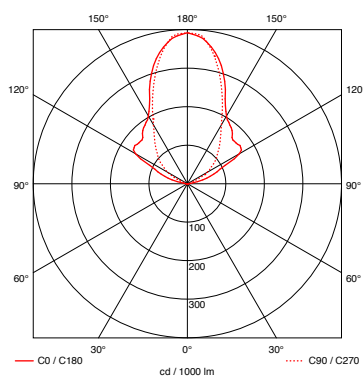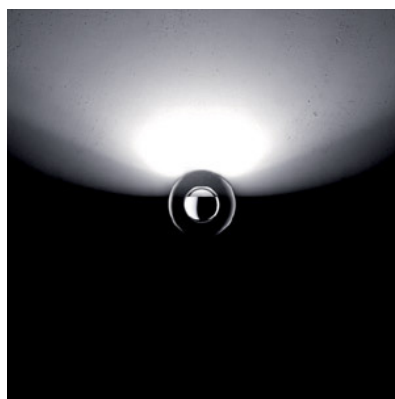

Divo B

reflector head for light with wide radiation to one side



with satinised glass, the light output varies compared to the illustrations shown

efficiency of reflector head

clear glass 69%
satinised glass 66%

material / surface

clear or satinised, heat-resistant glass
reflector aluminium
fixture matt chrome or chrome

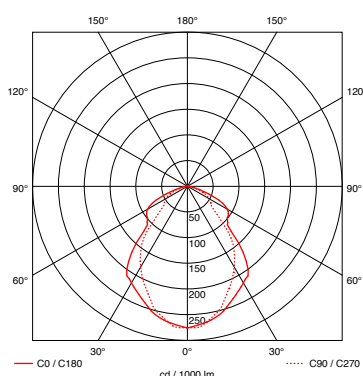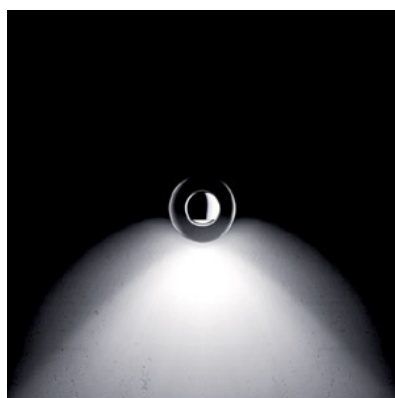

Divo C

reflector head for light with narrow radiation to one side



with satinised glass, the light output varies compared to the illustrations shown

efficiency of reflector head

clear glass 54%
satinised glass 52%

material / surface

clear or satinised, heat-resistant glass
reflector aluminium
fixture matt chrome or chrome

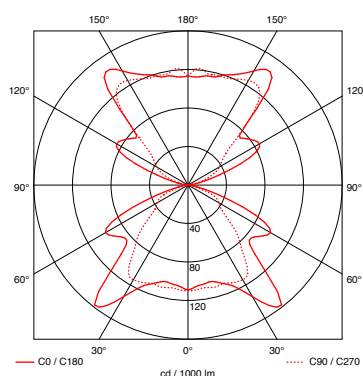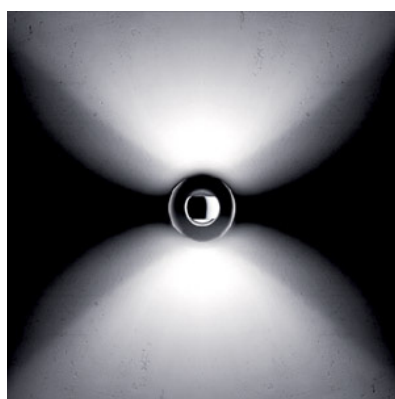

Divo D

reflector head for light with narrow radiation to both sides

with satinised glass, the light output varies compared to the illustrations shown



efficiency of reflector head

clear glass 77%
satinised glass 73%

material / surface

clear or satinised, heat-resistant glass
reflector aluminium
fixture matt chrome or chrome

Divo verticale recommended lighting effect

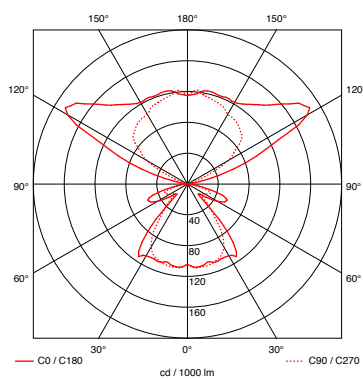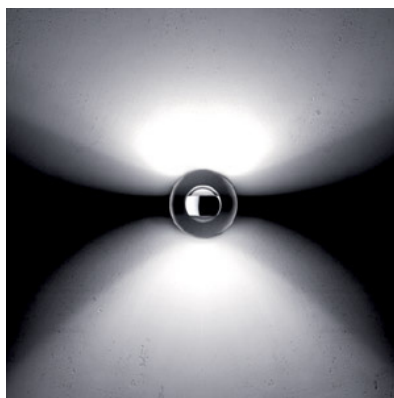

Divo E

reflector head for light with wide radiation to one and narrow radiation to the other side



with satinised glass the light output varies compared to the illustrations shown

efficiency of reflector head

clear glass 79%
satinised glass 77%

material / surface

clear or satinised, heat-resistant glass
reflector aluminium
fixture matt chrome or chrome

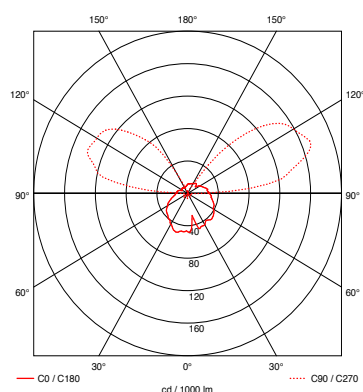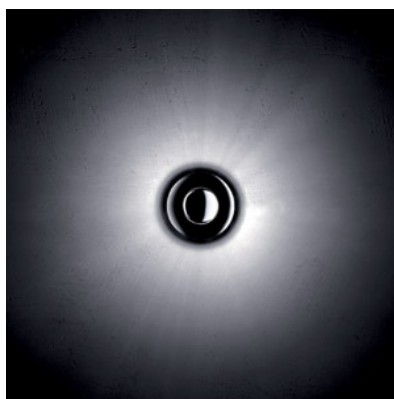

Divo Fw

reflector head for light with wide radiation to the rear side

with satinised glass, the light output varies compared to the illustrations shown

efficiency of reflector head

clear glass 63%
satinised glass 61%

material / surface


clear or satinised, heat-resistant glass
reflector aluminium
fixture matt chrome or chrome

Divo verticale
Item numbers

Item number
_matt chrome M
_chrome C



mounting transformer on site

flat box 		for plastering or wall / ceiling box h 8 mm, ø 80 mm	8Z 00 00 M 8Z 00 00 C
Electronic transformer max. 150 W  		for mounting in cavity walls / ceilings, trailing- or leading-edge dimmable, 50 – 150 W, l 153 mm, w 54 mm, h 36 mm	7Z 00 03 T
Electronic transformer max. 105 W  		for mounting in cavity walls / ceilings, trailing- or leading-edge dimmable, 35 – 105 W, l 107 mm, w 52 mm, h 30 mm	7Z 00 01 T
Electronic transformer max. 70 W   		for mounting in flush-mounted boxes (wall / ceiling), not for verticale on ceiling, not for plastering box ceiling, trailing- or leading-edge dimmable, 20 – 70 W, ø 53 mm, h 22 mm	7Z 00 02 T



transformer in surface mounted box

Box singolo 		mounting version incl. electronic transformer 35 – 75 W 176 mm, w 88 mm, h 28 mm	matt chrome 7Z 40 10 M F chrome 7Z 40 10 C F bianco / chrome 7Z 40 10 B F nero / chrome 7Z 40 10 N F
		track version	matt chrome 4Z 40 10 M F chrome 4Z 40 10 C F bianco / chrome 4Z 40 10 B F nero / chrome 4Z 40 10 N F