

cutsheet

Occhio



Puro faro singolo mains voltage halogen

Ceiling luminaire - modular system consisting of body and head

Thanks to its unique modularity the Occhio head-body system delivers impressive lighting solutions for your room. For different lighting effects diverse, turnable reflector heads are available, which can be easily substituted at any time thanks to a simple plug-in mechanism. The diverse wall and ceiling boxes allow for all recessed and surface mounting options.

Ceiling luminaire Occhio Puro faro singolo consisting of

body Occhio faro singolo - different length and surfacees
head Occhio Puro - different lighting effects and surfacees
Occhio accessories - different mounting options and surfacees

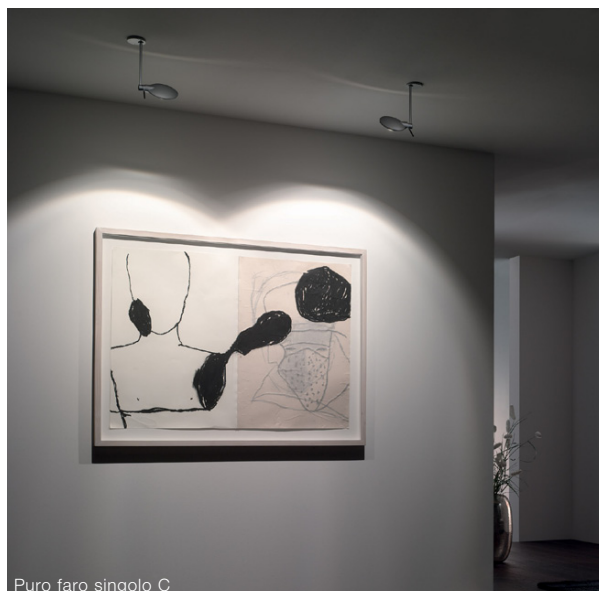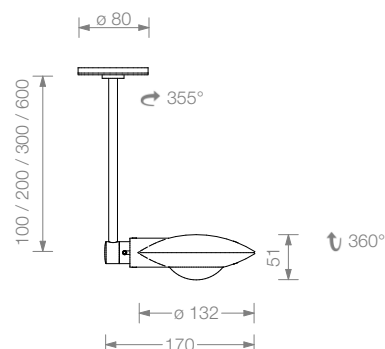

material
aluminium, brass, steel

surface
head: chrome, aluminium anodised
body: chrome, matt chrome

length/rotation angle
10 cm, 20 cm, 30 cm, 60 cm / 355°

recommended lighting effects
C, E, P, Q see p.2 cutsheet

light source
mains voltage halogen, operating voltage 230 V
max. 150 W, B15d Eco,
(max. 100 W for lighting effect C, D and E / max. 100 W for length 10 cm)
energy efficiency grade D, lifetime 2.000 h

luminous flux (bulb)
60 W / 980 lm, 70 W / 1180 lm, 100 W / 1800 lm, 150 W / 2870 lm

color temperature / color rendering
2900 K / CRI 100


weight
body and reflector head max. 1,1 kg

mounting accessories
for surface or recessed mounting, see p.3 cutsheet

cutsheet

Occhio

Puro faro singolo
recommended lighting effect


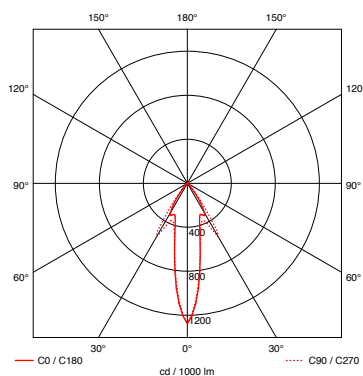


Puro C
reflector head for directed light
in one direction

efficiency of reflector head
54%

beam angle
approx. 65°

material / surface
lense optical glass
reflector matt chrome or chrome
fixture matt chrome or chrome

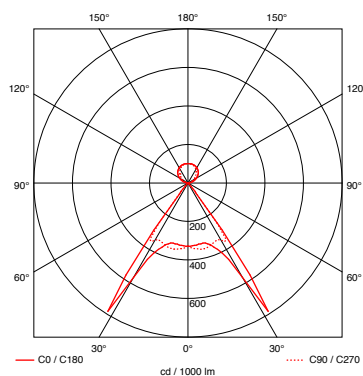
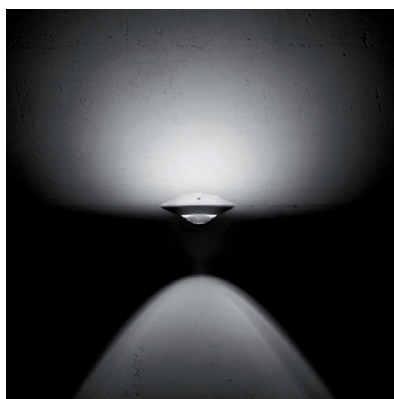


Puro E
reflector head for diffuse light in one direction
and directed light in the other direction

efficiency of reflector head
76%

beam angle
approx. 65°



material / surface
lense optical glass
satinised, heat-resistant glass
reflector matt chrome or chrome
fixture matt chrome or chrome

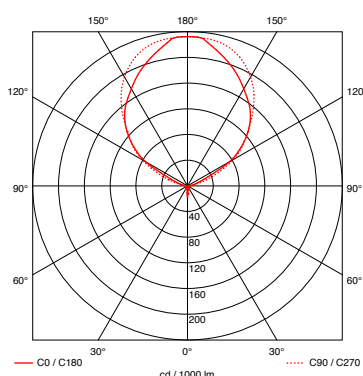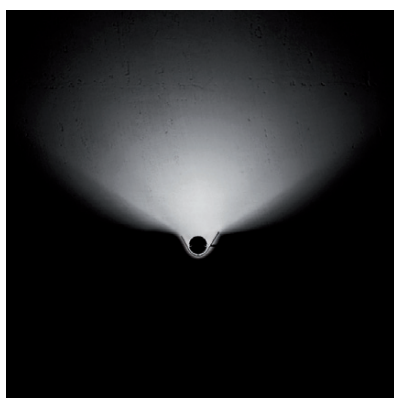

Puro P
reflector head for diffuse light in a symmetrical
direction

efficiency of reflector head
55%

material / surface
reflector matt chrome or chrome
fixture matt chrome or chrome

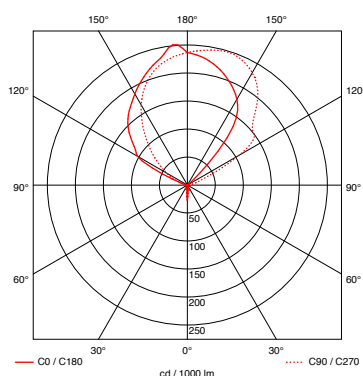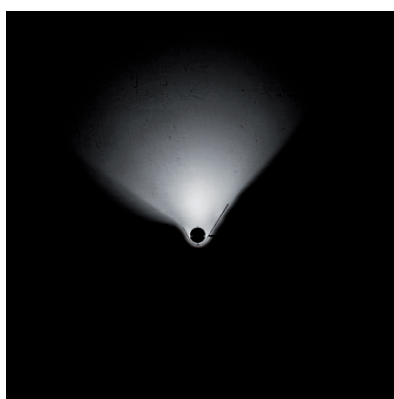

Puro Q
reflector head for diffuse asymmetric light in
one direction

efficiency of reflector head
52%

material / surface
reflector matt chrome or chrome
fixture matt chrome or chrome

cutsheet

Occhio


3|3

Puro faro singolo

Item numbers

Item number
_matt chrome M
_chrome C


faro singolo



max. 150 W
mains voltage halogen B15d
(length 10 cm: max. 100 W)
turnable

10 cm	8F 10 00 _
20 cm	8F 11 00 _
30 cm	8F 12 00 _
60 cm	8F 14 00 _

faro track singolo*



incl. track adapter silver,
max. 150 W mains voltage
halogen B15d, (length 10 cm:
max. 100 W), turnable

10 cm	4F 10 00 _ M
20 cm	4F 11 00 _ M
30 cm	4F 12 00 _ M
60 cm	4F 14 00 _ M

version with white track adapter


10 cm	4F 10 00 _ W
20 cm	4F 11 00 _ W
30 cm	4F 12 00 _ W
60 cm	4F 14 00 _ W

version with black track adapter

10 cm	4F 10 00 _ S
20 cm	4F 11 00 _ S
30 cm	4F 12 00 _ S
60 cm	4F 14 00 _ S




Puro C



reflector sphere/ lense
(max. 100 W) with diffusor*

8 K 00 41 _

Puro E



satinised glass/ lense
(max. 100 W) with diffusor*

8 K 00 44 _

Puro P



reflector tray, symmetrical

8 K 00 21 _

Puro Q




reflector tray, asymmetrical
left version
right version

8 K 00 22 _
8 K 00 22 _ R




flat box



for plastering or wall/ ceiling box
h 8 mm, ø 80 mm


8Z 00 00 _

spacing box



for surface mounting
h 22 mm, ø 80 mm

8Z 01 00 _



with hole for external cable supply
h 22 mm, ø 80 mm

8Z 03 00 _

* Diffusor necessary for ideal light distribution when using clear mains voltage halogen B15d bulb and lens

* also available in 1 phase track version for the same price, item no. 4F __ 00 __ 1

status 10 / 2014 | subject to alterations and technical change | all dimensions in mm

Occhio GmbH | Wiener Platz 7 | 81667 München | Tel +49-89-44 77 86 30 | Fax +49-89-44 77 86 39 | info@occhio.de