


Puro soffitto doppio mains voltage halogen

Ceiling luminaire - modular system consisting of body and head

Thanks to its unique modularity the Occhio head-body system delivers impressive lighting solutions for your room. For different lighting effects diverse, turnable reflector heads are available, which can be easily substituted at any time thanks to a simple plug-in mechanism. The diverse wall and ceiling boxes allow for all recessed and surface mounting options.

Ceiling luminaire Occhio Puro soffitto doppio consisting of

body Occhio soffitto doppio	- different length and surfacees
head Occhio Puro	- different lighting effects and surfacees
Occhio accessories	- different mounting options and surfacees

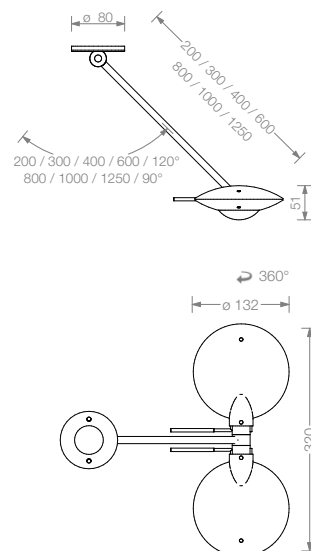

material

aluminium, brass, steel, glass

surface

head:	chrome, aluminium anodised
body:	chrome, matt chrome

length / travel

30 cm, 40 cm, 60 cm / 120°
80 cm, 100 cm, 125 cm / 90°

recommended lighting effects

A, B, C, E, P, Q, T, U see p.2 and p.3 cutsheet

light source

mains voltage halogen, operating voltage 230 V
max. 2 x 150 W, B15d Eco, (max. 100 W for lighting effect C und E)
energy efficiency grade D, lifetime 2.000 h

luminous flux (bulb)

60 W / 980 lm, 70 W / 1180 lm, 100 W / 1800 lm, 150 W / 2870 lm

color temperature / color rendering

2900 K / CRI 100



weight

body and reflector head max. 2,3 kg

mounting accessories

for surface or recessed mounting, see p.5 cutsheet


Puro soffitto doppio recommended lighting effect

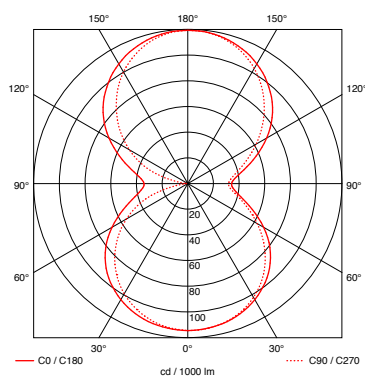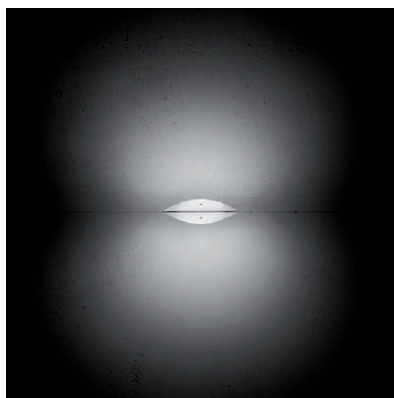

Puro A
reflector head for diffuse light
in two directions

efficiency of reflector head
84%



material / surface
satinised, heat-resistant glass
fixture matt chrome or chrome

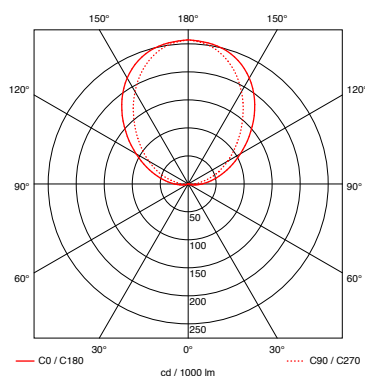

Puro B
reflector head for diffuse light
in one direction

efficiency of reflector head
67%

material / surface
satinised, heat-resistant glass
reflector matt chrome or chrome
fixture matt chrome or chrome

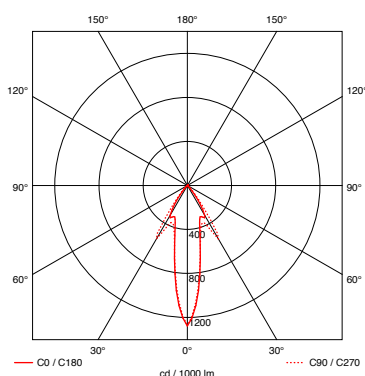
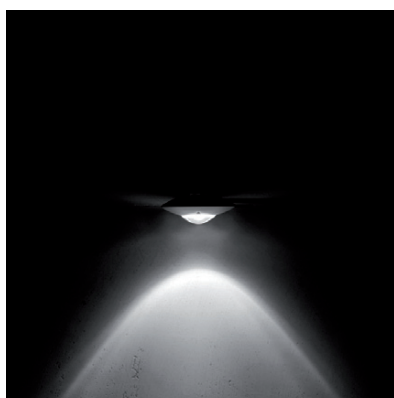


Puro C
reflector head for directed light
in one direction

efficiency of reflector head
54%

beam angle
approx. 65°

material / surface
lens optical glass
reflector matt chrome or chrome
fixture matt chrome or chrome

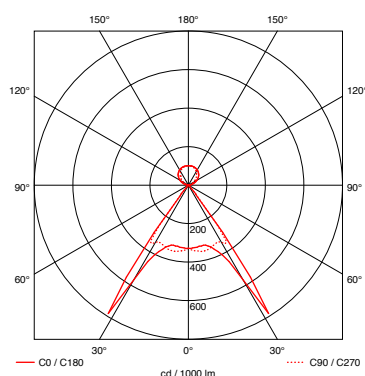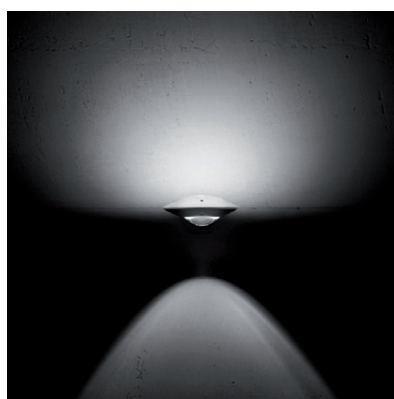



Puro E
reflector head for diffuse light in one direction
and directed light in the other direction

efficiency of reflector head
76%

beam angle
approx. 65°

material / surface
lens optical glass
satinised, heat-resistant glass
fixture matt chrome or chrome

Puro soffitto doppio recommended lighting effect

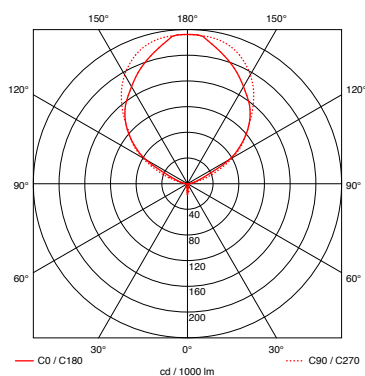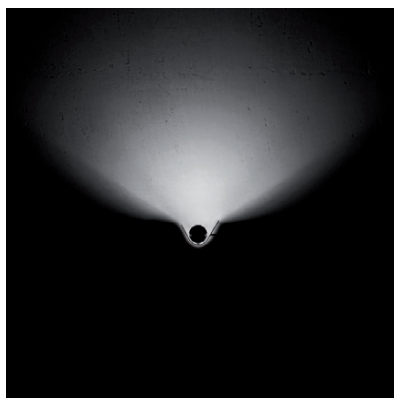


Puro P

reflector head for diffuse light in a symmetrical direction

efficiency of reflector head
55%

material / surface
reflector matt chrome or chrome
fixture matt chrome or chrome


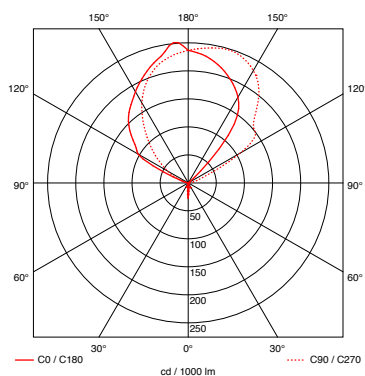


Puro Q

reflector head for diffuse asymmetric light in one direction

efficiency of reflector head
52%

material / surface
reflector matt chrome or chrome
fixture matt chrome or chrome

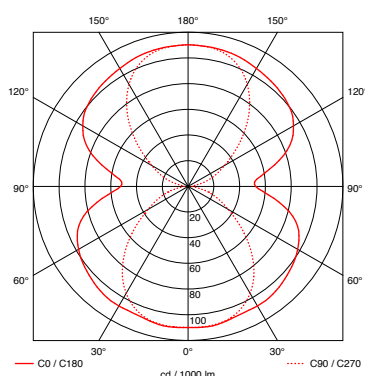
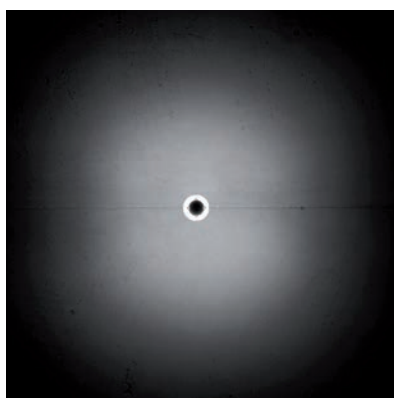


Puro T

reflector head for diffuse light

efficiency of reflector head
75%

material / surface
satinised, heat-resistant glass
fixture matt chrome or chrome

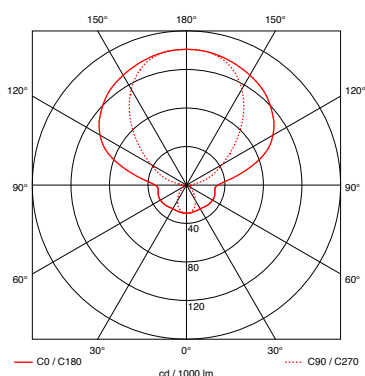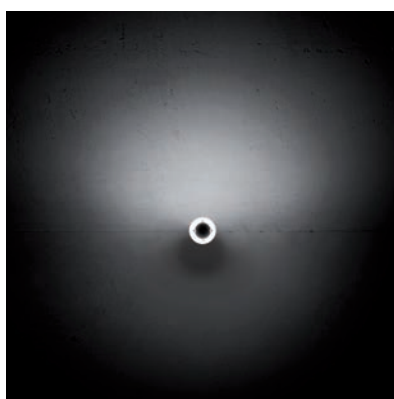

Puro U

reflector head for diffuse symmetric light in one direction

efficiency of reflector head
55%

material / surface
satinised, heat-resistant glass
perforated aluminium reflector
matt chrome or chrome
fixture matt chrome or chrome

Datenblatt


Occhio

4 | 5

Puro soffitto doppio Item numbers

Item number
_matt chrome M
_chrome C

soffitto doppio



max. 2 x 150 W
mains voltage halogen B15d

20 cm	8P 21 00 _
30 cm	8P 22 00 _
40 cm	8P 23 00 _
60 cm	8P 24 00 _
80 cm	8P 25 00 _
100 cm	8P 26 00 _
125 cm	8P 27 00 _



Puro A



satinised glass / satinised glass

8 K 00 11 _


Puro B



reflector sphere / satinised glass

8 K 00 12 _


Puro C



reflector sphere / lense
(max. 100 W) with diffusor*

8 K 00 41 _

Puro E



satinised glass / lense
(max. 100 W) with diffusor*

8 K 00 44 _

Puro P



reflector tray, symmetrical

8 K 00 21 _

Puro Q



reflector tray, asymmetrical
left version
right version

8 K 00 22 _
8 K 00 22 _ R

Puro T



satinised glass

8 K 00 31 _

Puro U



satinised glass, perforated aluminium
reflector

8 K 00 32 _

* Diffusor necessary for ideal light distribution when using clear mains voltage halogen B15d bulb and lens

Puro soffitto doppio
Item numbers

Item number
_matt chrome M
_chrome C



flat box			
		for plastering or wall / ceiling box h 8 mm, ø 80 mm	8Z 00 00 _
		180° turnable h 12 mm, ø 80 mm	8Z 00 01 _
spacing box			
		for surface mounting h 22 mm, ø 80 mm	8Z 01 00 _
		with hole for external cable supply h 22 mm, ø 80 mm	8Z 03 00 _
		180° turnable h 26 mm, ø 80 mm	8Z 01 01 _