

Puro soffitto doppio low voltage halogen


Ceiling luminaire - modular system consisting of body and head

Thanks to its unique modularity the Occhio head-body system delivers impressive lighting solutions for your room. For different lighting effects diverse, turnable reflector heads are available, which can be easily substituted at any time thanks to a simple plug-in mechanism. The diverse wall and ceiling boxes allow for all recessed and surface mounting options.

Ceiling luminaire Occhio Puro soffitto doppio consisting of

body Occhio soffitto doppio	- different length and surfaces
head Occhio Puro	- different lighting effects and surfaces
Occhio accessories	- different mounting options and surfaces

IP 20     

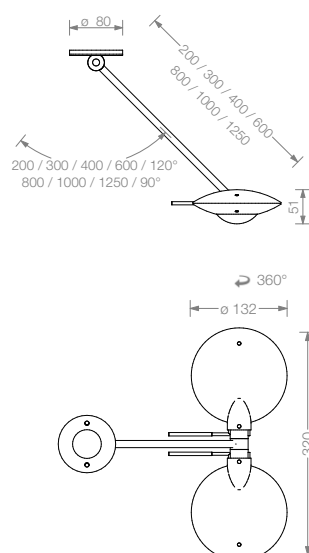

material

aluminium, brass, steel, glass

surface

head: chrome, aluminium anodised
body: chrome, matt chrome

length / travel

20 cm, 30 cm, 40 cm, 60 cm / 120°
80 cm, 100 cm, 125 cm / 90°

recommended lighting effects

A, B, C, E, P, Q, T, U see p.2 and p.3 cutsheet

light source

low voltage halogen, operating voltage 12 V
max. 2 x 60 W, GY6.35, energy efficiency grade B, lifetime 4.000 h

luminous flux (bulb)

35 W / 860 lm, 50 W / 1180 lm, 60 W / 1650 lm

color temperature / color rendering

3000 K / CRI 100



weight

body and reflector head max. 2,3 kg

mounting accessories

for surface or recessed mounting, see p.5 cutsheet


Puro soffitto doppio recommended lighting effect

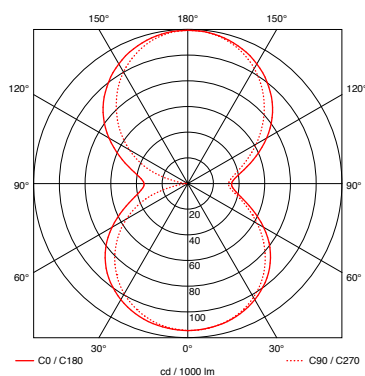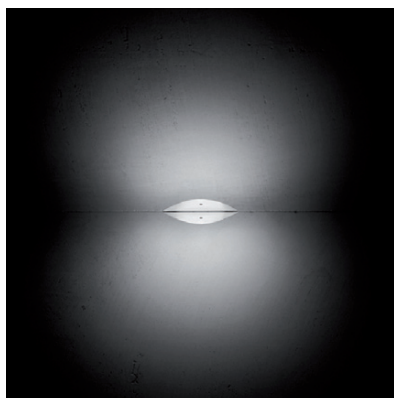

Puro A
reflectorhead for diffuse light
in two directions

efficiency of reflector head
84%



material / surface
reflector matt chrome or chrome
fixture matt chrome or chrome

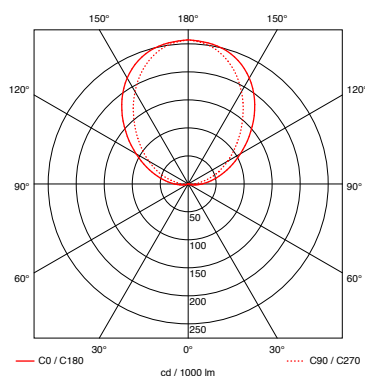

Puro B
reflector head for diffuse light
in one direction

efficiency of reflector head
67%

material / surface
satinised, heat-resistant glass
reflector matt chrome or chrome
fixture matt chrome or chrome

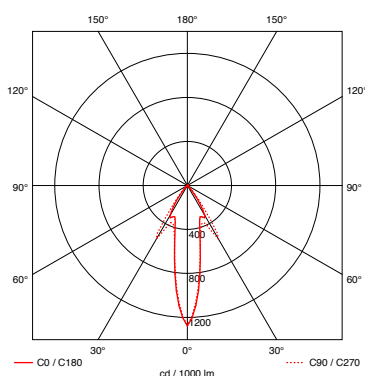
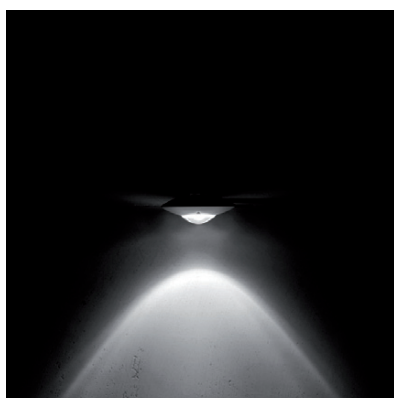


Puro C
reflector head for directed light
in one direction

efficiency of reflector head
54%

beam angle
approx. 65°

material / surface
lense optical glass
reflector matt chrome or chrome
fixture matt chrome or chrome

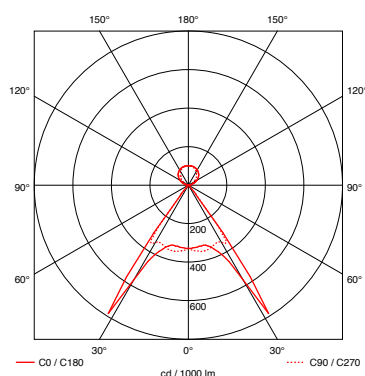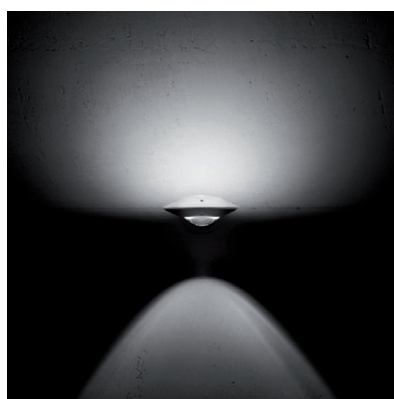



Puro E
reflector head for diffuse light in one direction
and directed light in the other direction

efficiency of reflector head
76%

beam angle
approx. 65°

material / surface
lense optical glass
satinised, heat-resistant glass
fixture matt chrome or chrome

Puro soffitto doppio recommended lighting effect

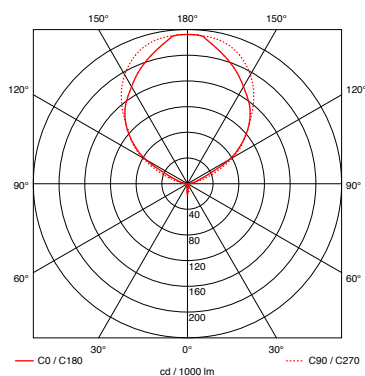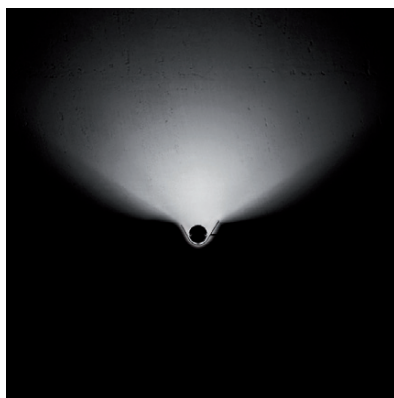


Puro P

reflector head for diffuse light in a symmetrical direction

efficiency of reflector head
55%

material / surface
reflector matt chrome or chrome
fixture matt chrome or chrome


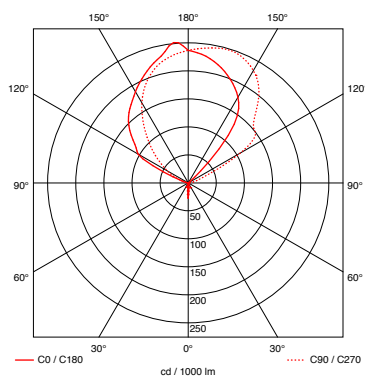


Puro Q

reflector head for diffuse asymmetric light in one direction

efficiency of reflector head
52%

material / surface
reflector matt chrome or chrome
fixture matt chrome or chrome

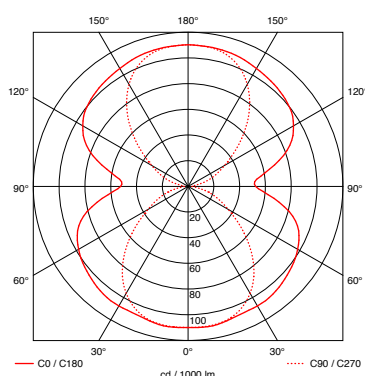
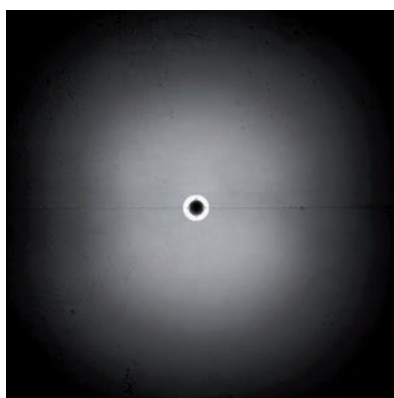


Puro T

reflector head for diffuse light

efficiency of reflector head
75%

material / surface
satinised, heat-resistant glass
fixture matt chrome or chrome

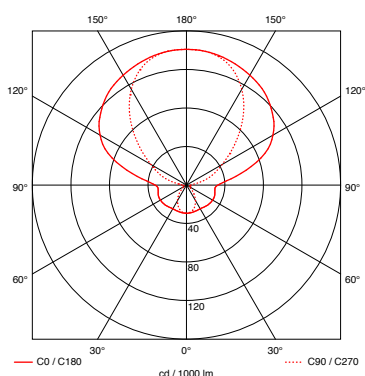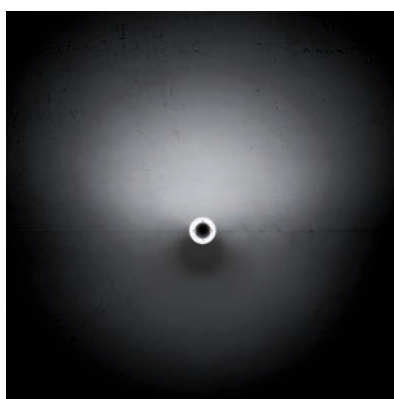

Puro U

reflector head for diffuse symmetric light in one direction


efficiency of reflector head
55%

material / surface
satinised, heat-resistant glass
perforated aluminium reflector
matt chrome or chrome
fixture matt chrome or chrome

Puro soffitto doppio Item numbers

Item number
_matt chrome M
_chrome C

soffitto doppio



max. 2 x 60 W
low voltage halogen GY6.35

20 cm	7P 21 00 _
30 cm	7P 22 00 _
40 cm	7P 23 00 _
60 cm	7P 24 00 _
80 cm	7P 25 00 _
100 cm	7P 26 00 _
125 cm	7P 27 00 _



Puro A



satinised glass / satinised glass

8 K 00 11 _

Puro B



reflector sphere / satinised glass

8 K 00 12 _


Puro C



reflector sphere / lense

7 K 00 41 _

Puro E



satinised glass / lense

7 K 00 44 _

Puro P



reflector tray, symmetrical

8 K 00 21 _

Puro Q



reflector tray, asymmetrical
left version
right version

8 K 00 22 _
8 K 00 22 _ R

Puro T



satinised glass

8 K 00 31 _

Puro U




satinised glass, perforated aluminium
reflector

8 K 00 32 _


Puro soffitto doppio
Item numbers

Item number
_matt chrome M
_chrome C



mounting transformer on site		
flat box		
	for plastering or wall / ceiling box h 8 mm, ø 80 mm	8Z 00 00 M 8Z 00 00 C
Electronic transformer max. 150 W		
	for mounting in cavity walls / ceilings, trailing- or leading-edge dimmable, 50 – 150 W, l 153 mm, w 54 mm, h 36 mm	7Z 00 03 T
Electronic transformer max. 105 W		
	for mounting in cavity walls / ceilings, trailing- or leading-edge dimmable, 35 – 105 W, l 107 mm, w 52 mm, h 30 mm	7Z 00 01 T
Electronic transformer max. 70 W		
	for mounting in flush-mounted boxes (wall / ceiling), not for verticale on ceiling, not for plastering box ceiling, trailing- or leading-edge dimmable, 20 – 70 W, ø 53 mm, h 22 mm	7Z 00 02 T



transformer in surface mounted box		
Box due		
with 2 soffitto singolo body soffitto singolo see cutsheet ceiling lamp soffitto singolo		
	mounting version for 2 x soffitto singolo NV incl. 2 x electronic transformer 35 – 75 W l 304 mm, w 88 mm, h 36 mm	matt chrome 7Z 90 2 00 M F chrome 7Z 90 2 00 C F bianco / chrome 7Z 90 2 00 B F nero / chrome 7Z 90 2 00 N F
	track version	matt chrome 4Z 90 2 00 M F chrome 4Z 90 2 00 C F bianco / chrome 4Z 90 2 00 B F nero / chrome 4Z 90 2 00 N F