


Puro soffitto due low voltage halogen

Ceiling luminaire - modular system consisting of body and head

Thanks to its unique modularity the Occhio head-body system delivers impressive lighting solutions for your room. For different lighting effects diverse, turnable reflector heads are available, which can be easily substituted at any time thanks to a simple plug-in mechanism. The diverse wall and ceiling boxes allow for all recessed and surface mounting options.

Ceiling luminaire Occhio Puro soffitto due consisting of

body Occhio soffitto due - different length and surfaces
head Occhio Puro - different lighting effects and surfaces
Occhio accessories - different mounting options and surfaces

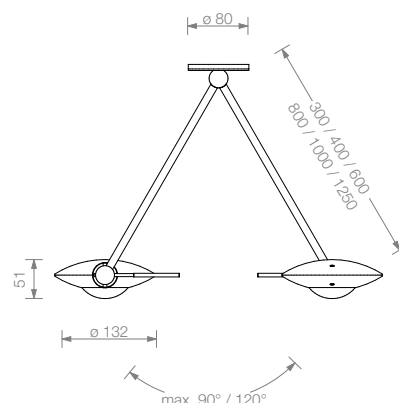

material
aluminium, brass, steel, glass

surface
head: chrome, aluminium anodised
body: chrome, matt chrome

length / travel
30 cm, 40 cm, 60 cm / 120°
80 cm, 100 cm, 125 cm / 90°

recommended lighting effects
A, B, C, E, P, Q, T, U see p.2 and p.3 cutsheet

light source
low voltage halogen, operating voltage 12 V
max. 2 x 60 W, GY6.35, energy efficiency grade B, lifetime 4.000 h



luminous flux (bulb)
35 W / 860 lm, 50 W / 1180 lm, 60 W / 1650 lm

color temperature / color rendering
3000 K / CRI 100

weight
body and reflector head max. 2,7 kg

mounting accessories
for surface or recessed mounting, see p.5 cutsheet


Puro soffitto due recommended lighting effect

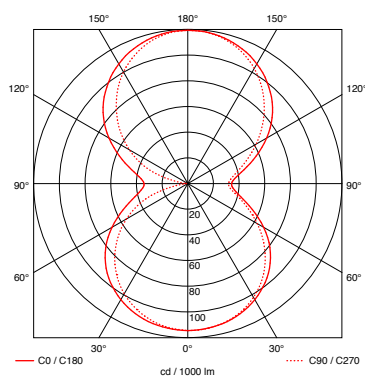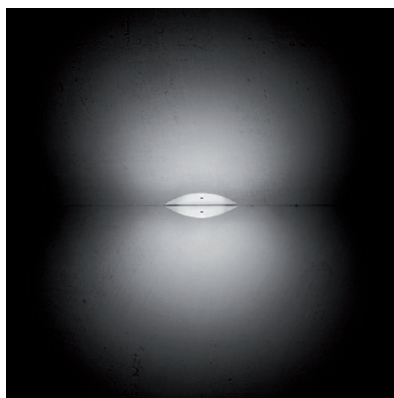

Puro A
reflectorhead for diffuse light
in two directions

efficiency of reflector head
84%



material / surface
reflector matt chrome or chrome
fixture matt chrome or chrome

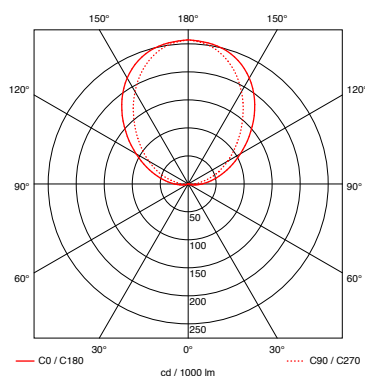

Puro B
reflector head for diffuse light
in one direction

efficiency of reflector head
67%

material / surface
satinised, heat-resistant glass
reflector matt chrome or chrome
fixture matt chrome or chrome

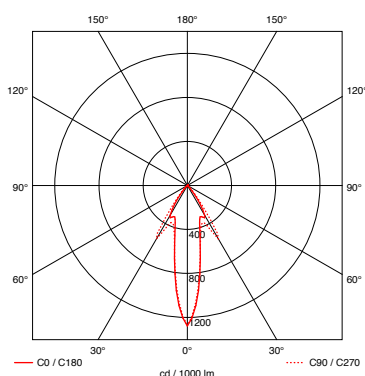
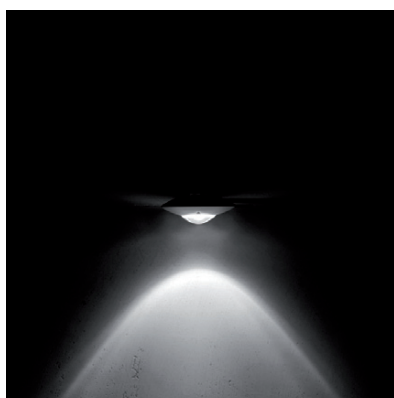


Puro C
reflector head for directed light
in one direction

efficiency of reflector head
54%

beam angle
approx. 65°

material / surface
lense optical glass
reflector matt chrome or chrome
fixture matt chrome or chrome

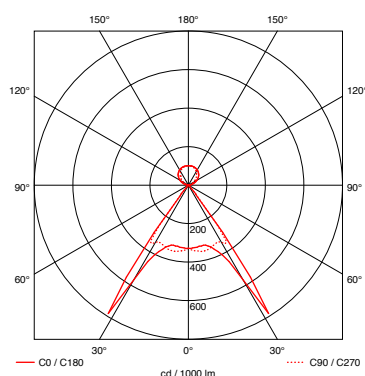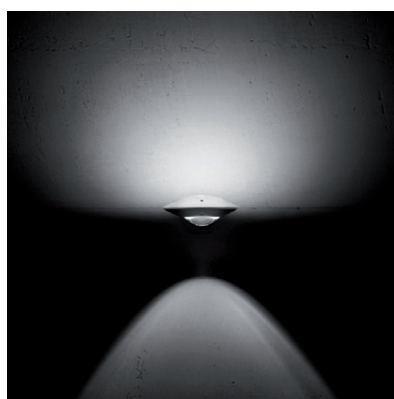



Puro E
reflector head for diffuse light in one direction
and directed light in the other direction

efficiency of reflector head
76%

beam angle
approx. 65°

material / surface
lense optical glass
satinised, heat-resistant glass
fixture matt chrome or chrome



Puro soffitto due recommended lighting effect

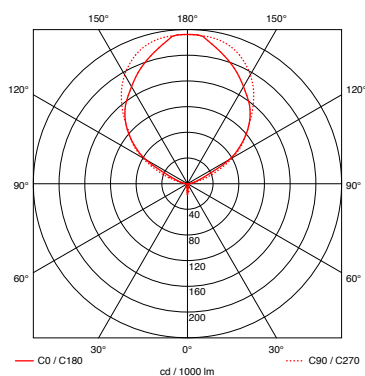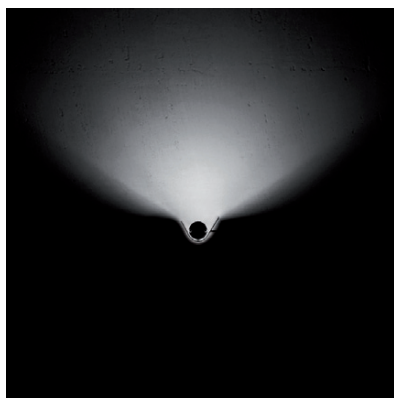

Puro P
reflector head for diffuse light in one
symmetrical direction

efficiency of reflector head
55%



material / surface
reflector matt chrome or chrome
fixture matt chrome or chrome

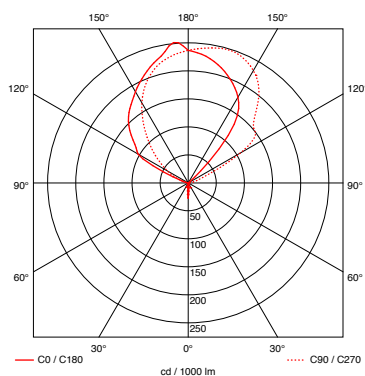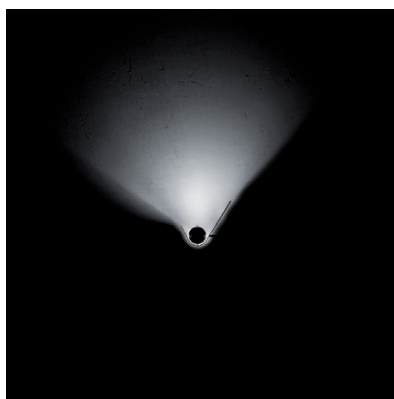

Puro Q
reflector head for diffuse asymmetric light in
one direction

efficiency of reflector head
52%



material / surface
reflector matt chrome or chrome
fixture matt chrome or chrome

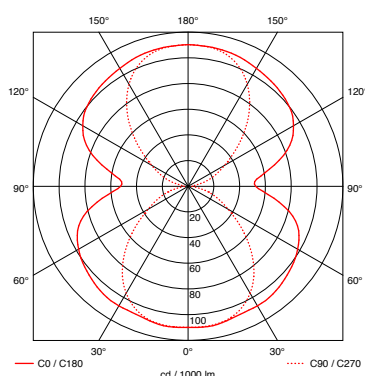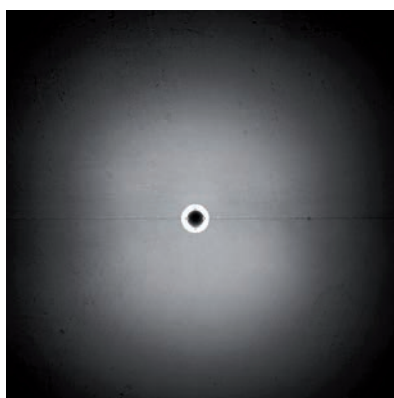

Puro T
reflector head for diffuse light

efficiency of reflector head
75%

material / surface
satinised, heat-resistant glass
fixture matt chrome or chrome

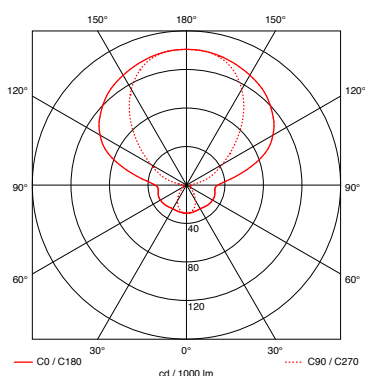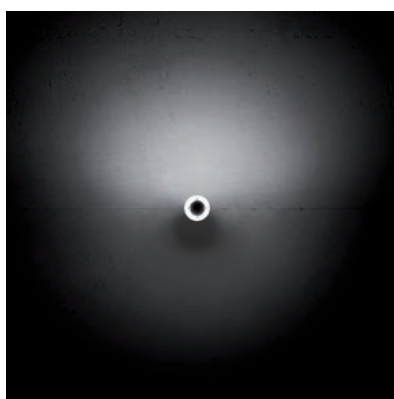

Puro U
reflector head for diffuse symmetric light in
one direction

efficiency of reflector head
55%

material / surface
satinised, heat-resistant glass
perforated aluminium reflector
matt chrome or chrome
fixture matt chrome or chrome

cutsheet

Occhio

4 | 5

Puro soffitto due Item numbers

Item number
_matt chrome M
_chrome C

soffitto due



max. 2x 60 W
low voltage halogen B15 d

30 cm	7S 32 00 _
40 cm	7S 33 00 _
60 cm	7S 34 00 _
80 cm	7S 35 00 _
100 cm	7S 36 00 _
125 cm	7S 37 00 _



Puro A



satinised glass / satinised glass

8 K 00 11 _

Puro B



satinised glass / reflector sphere

8 K 00 12 _

Puro C



reflector sphere / lense

7 K 00 41 _

Puro E



satinised glass / lense

7 K 00 44 _

Puro P



reflector tray, symmetrical

8 K 00 21 _

Puro Q



reflector tray, asymmetrical
left version
right version

8 K 00 22 _
8 K 00 22 _ R

Puro T



satinised glass

8 K 00 31 _

Puro U




satinised glass,
perforated aluminiumreflector

8 K 00 32 _


Puro soffitto due
Item numbers

Item number
_matt chrome M
_chrome C



mounting transformer on site		
flat box		
	for plastering or wall / ceiling box h 8 mm, ø 80 mm	8Z 00 00 M 8Z 00 00 C
Electronic transformer max. 150 W	for mounting in cavity walls / ceilings, trailing- or leading-edge dimmable, 50 – 150 W, l 153 mm, w 54 mm, h 36 mm	7Z 00 03 T
		
Electronic transformer max. 105 W	for mounting in cavity walls / ceilings, trailing- or leading-edge dimmable, 35 – 105 W, l 107 mm, w 52 mm, h 30 mm	7Z 00 01 T
		
Electronic transformer max. 70 W	for mounting in flush-mounted boxes (wall / ceiling), not for verticale on ceiling, not for plastering box ceiling, trailing- or leading-edge dimmable, 20 – 70 W, ø 53 mm, h 22 mm	7Z 00 02 T
		



transformer in surface mounted box		
Box due		
with 2 soffitto singolo body soffitto singolo see cutsheet ceiling lamp soffitto singolo		
	mounting version for 2 x soffitto singolo NV incl. 2 x electronic transformer 35 – 75 W l 304 mm, w 88 mm, h 36 mm	matt chrome 7Z 90 2 00 M F chrome 7Z 90 2 00 C F bianco / chrome 7Z 90 2 00 B F nero / chrome 7Z 90 2 00 N F
	track version	matt chrome 4Z 90 2 00 M F chrome 4Z 90 2 00 C F bianco / chrome 4Z 90 2 00 B F nero / chrome 4Z 90 2 00 N F