


Puro verticale mains voltage halogen

Ceiling luminaire - modular system consisting of body and head

Thanks to its unique modularity the Occhio head-body system delivers impressive lighting solutions for your room. For different lighting effects diverse, turnable reflector heads are available, which can be easily substituted at any time thanks to a simple plug-in mechanism. The diverse wall and ceiling boxes allow for all recessed and surface mounting options.

Ceiling luminaire Occhio Puro verticale consisting of

- body Occhio verticale - different length and surfacees
- head Occhio Puro - different lighting effects and surfacees
- Occhio accessories - different mounting options and surfacees

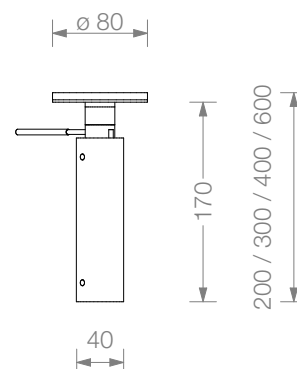

material

aluminium, brass, steel, glass

surface

head: chrome, aluminium anodised
body: chrome, matt chrome

length

20 cm, 30 cm, 40 cm, 60 cm
length incl. reflector head

recommended lighting effects

T, U see p.2 cutsheet

light source

mains voltage halogen, operating voltage 230 V
max. 100 W, B15d Eco, (max. 75 W on normally inflammable surfaces)
energy efficiency grade D, lifetime 2.000 h

luminous flux (bulb)

60 W / 980 lm, 70 W / 1180 lm, 100 W / 1800 lm

color temperature / color rendering

2900 K / CRI 100

weight

body and reflector head max. 0,9 kg

mounting accessories



for surface or recessed mounting, see p.3

cutsheet

Occhio

2 | 3



Puro verticale recommended lighting effect

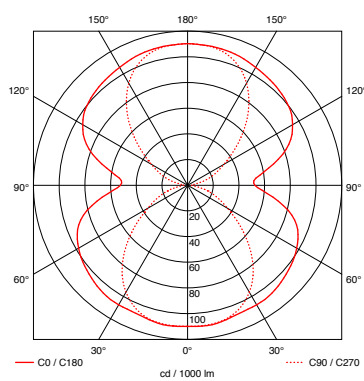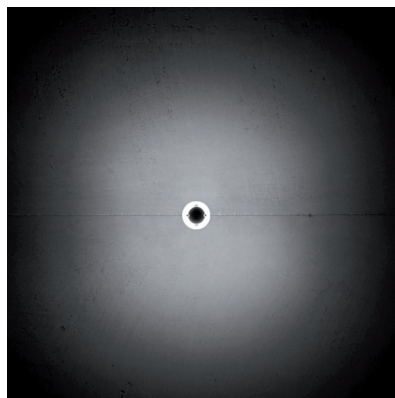

Puro T
reflector head for diffuse light

efficiency of reflector head
75%

material / surface
satinised, heat-resistant glass
fixture matt chrome or chrome

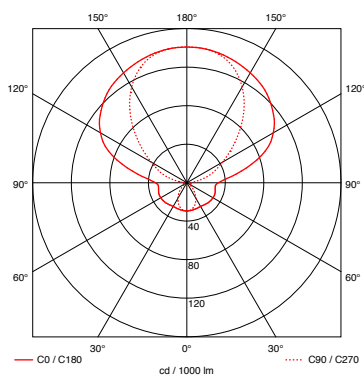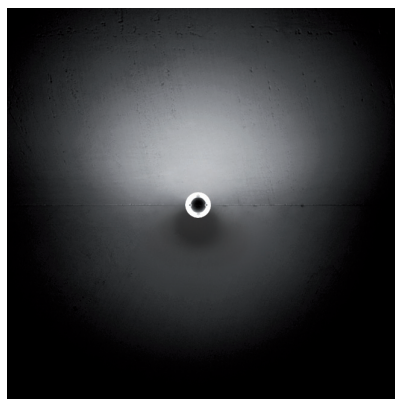

Puro U
reflector head for diffuse symmetric light in
one direction

efficiency of reflector head
55%

material / surface
satinised, heat-resistant glass
perforated aluminium reflector
matt chrome or chrome
fixture matt chrome or chrome

cutsheet

Occhio

3|3

Puro verticale
Item numbers

Item number
_matt chrome M
_chrome C

verticale			
	20 cm		30 / 40 / 60 cm
		max. 100 W mains voltage halogen B15d (max. 75W on normally inflammable surfaces)	
		length incl. reflector heads	
20 cm		8 V 11 00 _	
30 cm		8 V 12 00 _	
40 cm		8 V 13 00 _	
60 cm		8 V 14 00 _	



Puro T			
		satinised glass	
		8 K 00 31 _	
Puro U			
		satinised glass, perforated aluminium reflector	
		8 K 00 32 _	



flat box			
		for plastering or wall / ceiling box h 8 mm, ø 80 mm	
		8 Z 00 00 _	
spacing box			
		for surface mounting h 22 mm, ø 80 mm	
		8 Z 01 00 _	
		with hole for external cable supply h 22 mm, ø 80 mm	
		8 Z 03 00 _	