

Puro verticale low voltage halogen

Ceiling luminaire - modular system consisting of body and head

Thanks to its unique modularity the Occhio head-body system delivers impressive lighting solutions for your room. For different lighting effects diverse, turnable reflector heads are available, which can be easily substituted at any time thanks to a simple plug-in mechanism. The diverse wall and ceiling boxes allow for all recessed and surface mounting options.


Ceiling luminaire Occhio Puro verticale consisting of

- body Occhio verticale - different length and surfaces
- head Occhio Puro - different lighting effects and surfaces
- Occhio accessories - different mounting options and surfaces

IP20     



Puro verticale soffitto T

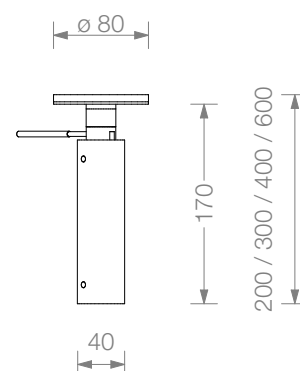

material

aluminium, brass, steel, glass

surface

head: chrome, aluminium anodised
body: chrome, matt chrome

length

20 cm, 30 cm, 40 cm, 60 cm
length incl. reflector head

recommended lighting effects

T, U see p.2 cutsheet

light source

low voltage halogen, operating voltage 12 V
max. 60 W, GY6.35, energy efficiency grade B, lifetime 4.000 h

luminous flux (bulb)

35 W / 860 lm, 50 W / 1180 lm, 60 W / 1650 lm

color temperature / color rendering

3000 K / CRI 100

weight

body and reflector head max. 0,9 kg

mounting accessories



for surface or recessed mounting, see p.4
external gear necessary

cutsheet

Occhio

2 | 4



Puro verticale recommended lighting effect

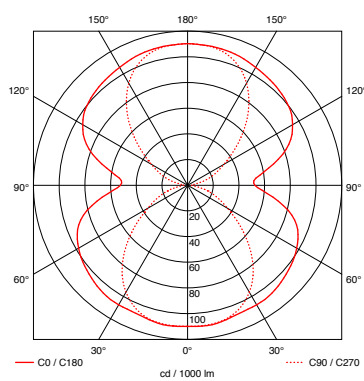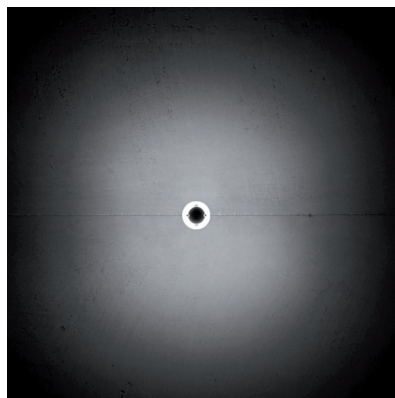

Puro T
reflector head for diffuse light

efficiency of reflector head
75%

material / surface
satinised, heat-resistant glass
fixture matt chrome or chrome

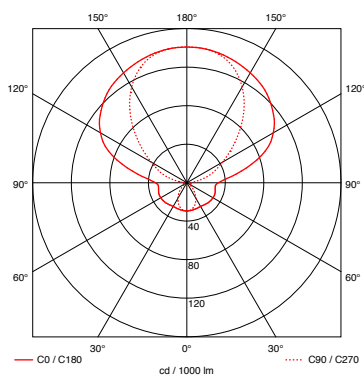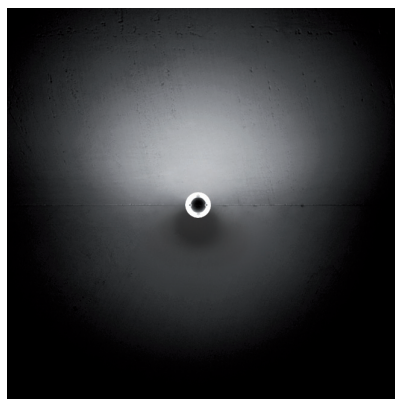

Puro U
reflector head for diffuse symmetric light in
one direction

efficiency of reflector head
55%


material / surface
satinised, heat-resistant glass
perforated aluminium reflector
matt chrome or chrome
fixture matt chrome or chrome

Puro verticale
Item numbers

Item number
_matt chrome M
_chrome C



mounting transformer on site

flat box 		for plastering or wall / ceiling box h 8 mm, ø 80 mm	8Z 00 00 M 8Z 00 00 C
Electronic transformer max. 150 W  		for mounting in cavity walls / ceilings, trailing- or leading-edge dimmable, 50 – 150 W, l 153 mm, w 54 mm, h 36 mm	7Z 00 03 T
Electronic transformer max. 105 W  		for mounting in cavity walls / ceilings, trailing- or leading-edge dimmable, 35 – 105 W, l 107 mm, w 52 mm, h 30 mm	7Z 00 01 T
Electronic transformer max. 70 W   		for mounting in flush-mounted boxes (wall / ceiling), not for verticale on ceiling, not for plastering box ceiling, trailing- or leading-edge dimmable, 20 – 70 W, ø 53 mm, h 22 mm	7Z 00 02 T



transformer in surface mounted box

Box singolo  	 	mounting version incl. electronic transformer 35 – 75 W 176 mm, w 88 mm, h 28 mm		matt chrome chrome bianco / chrome nero / chrome	7Z 40 10 M 7Z 40 10 C 7Z 40 10 B 7Z 40 10 N	F F F F
		track version		matt chrome chrome bianco / chrome nero / chrome	4Z 40 10 M 4Z 40 10 C 4Z 40 10 B 4Z 40 10 N	F F F F