


Puro lettura low voltage halogen

Floor luminaire - modular system consisting of body and head

Thanks to its unique modularity the Occhio head-body system delivers impressive lighting solutions for your room. For different lighting effects diverse, turnable reflector heads are available, which can be easily substituted at any time thanks to a simple plug-in mechanism. The diverse wall and ceiling boxes allow for all recessed and surface mounting options.



Floor luminaire Occhio Puro lettura consisting of

- body Occhio lettura - different length and surfaceces
- head Occhio Puro - different lighting effects and surfaceces

IP 20     



Puro lettura C

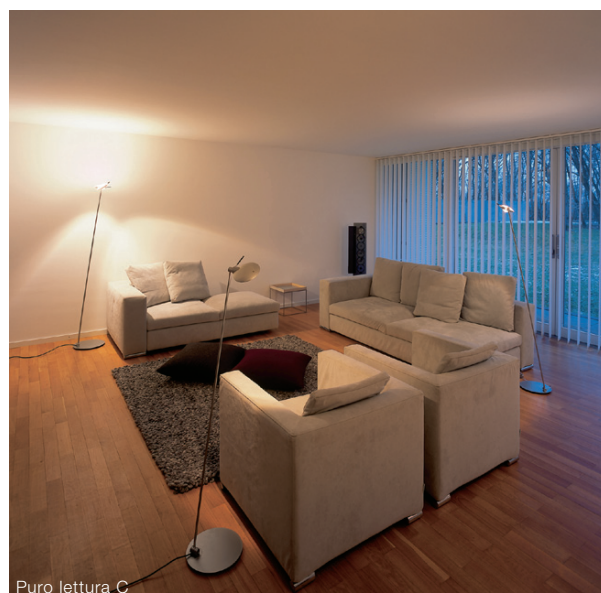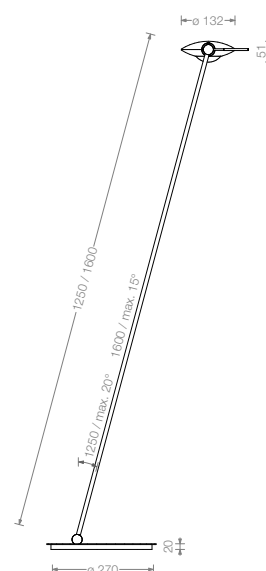

Puro lettura C

material
aluminium, brass, steel, glass

surface
head: chrome, aluminium anodised
body: chrome, matt chrome
base: chrome, matt chrome, black or white high gloss surface (bianco, nero), matt black surface

length / travel
125 cm / 20°, 160 cm / 15°, base optional 360° rotatable

recommended lighting effects
B, C, E see p.2 cutsheet

light source
low voltage halogen, operating voltage 12 V
max. 60 W, GY6.35, energy efficiency grade B, lifetime 4.000 h

luminous flux (bulb)
35 W / 860 lm, 50 W / 1180 lm, 60 W / 1650 lm

color temperature / color rendering
3000 K / CRI 100

weight
body and reflector head max. 8 kg


interface
Rocker switch element with dimmer and trafo, optional for dimming or touchdimming the lamp

cutsheet

Occhio

2|3



Puro lettura
recommended lighting effect

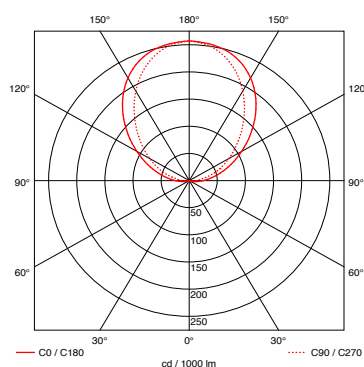

Puro B
reflector head for diffuse light
in one direction

efficiency of reflector head
67%

material / surface
satinised, heat-resistant glass
reflector matt chrome or chrome
fixture matt chrome or chrome

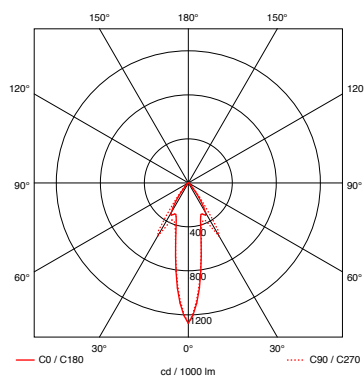
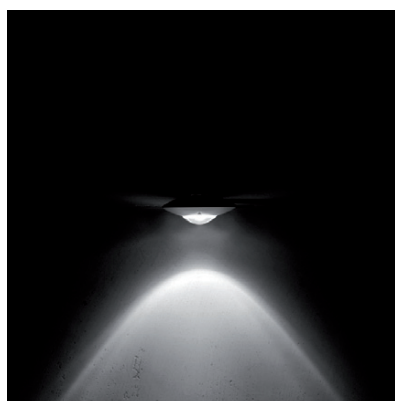


Puro C
reflector head for directed light
in one direction

efficiency of reflector head
54%

beam angle
approx. 65°

material / surface
lense optical glass
reflector matt chrome or chrome
fixture matt chrome or chrome

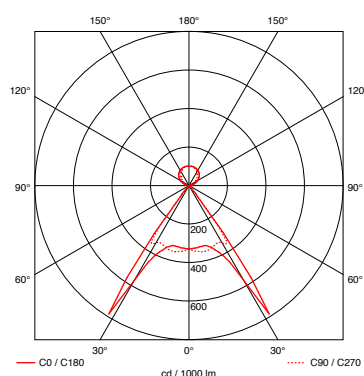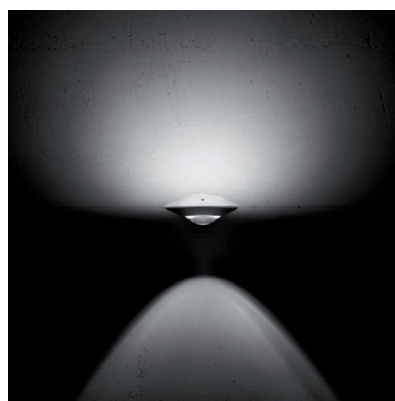

Puro E
reflector head for diffuse light
in one direction and directed light
in the other direction

efficiency of reflector head
76%

beam angle
approx. 65°

material / surface
lense optical glass
satinised, heat-resistant glass
fixture matt chrome or chrome

cutsheet

Occhio


3|3

Puro lettura Item numbers

Base surface
(cover changeable)

Item number
_matt chrome M
_chrome C

lettura

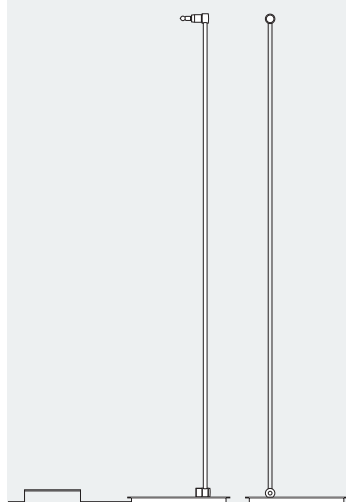

max. 60 W low voltage halogen
GY6.35, Occhio controller NV
(rocker switch) incl. bulb 60 W IRC,
height 160 cm, ø base 27 cm

160 cm version with turnable base

max. 60 W
low voltage halogen GY6.35,
Occhio controller NV (rocker switch)
incl. bulb 60 W IRC,
height 125 cm, ø base 27 cm

125 cm version with turnable base

matt black	7L 78 00 MS F
matt chrome	7L 78 00 MM F
chrome	7L 78 00 CC F
bianco	7L 78 00 CB F
nero	7L 78 00 CN F

matt black	7L 78 00 MS T
matt chrome	7L 78 00 MM T
chrome	7L 78 00 CC T
bianco	7L 78 00 CB T
nero	7L 78 00 CN T

matt black	7L 77 00 MS F
matt chrome	7L 77 00 MM F
chrome	7L 77 00 CC F
bianco	7L 77 00 CB F
nero	7L 77 00 CN F

matt black	7L 77 00 MS T
matt chrome	7L 77 00 MM T
chrome	7L 77 00 CC T
bianco	7L 77 00 CB T
nero	7L 77 00 CN T




Puro B



satinated glass/ reflector sphere

8 K 00 12 _

Puro C



reflector sphere/ lense
(max. 100 W)

7 K 00 41 _

Puro E



satinated glass/ lense
(max. 100 W)

7 K 00 44 _



Occhio sensorpad (optional)



pluggable into Occhio controller NV,
ø 45 mm, cable length 180 cm

7L 70 01 _