

Puro filo doppio mains voltage halogen

Suspended luminaire - modular system consisting of body and head


Thanks to its unique modularity the Occhio head-body system delivers impressive lighting solutions for your room. For different lighting effects diverse, turnable reflector heads are available, which can be easily substituted at any time thanks to a simple plug-in mechanism. The diverse wall and ceiling boxes allow for all recessed and surface mounting options.

Suspended luminaire Occhio Puro filo doppio consisting of

body Occhio filo doppio - different length and surfacees
head Occhio Puro - different lighting effects and surfacees
Occhio accessories - different mounting options and surfacees



Puro filo doppio E

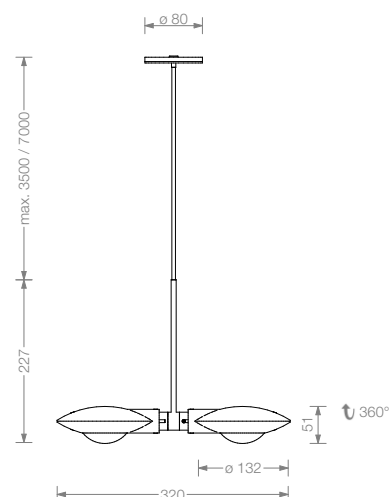

material

aluminium, brass, steel, glass

surface

head: chrome, aluminium anodised
body: chrome, matt chrome

length of cable

350 cm or 700 cm

recommended lighting effects

B, C, E see p.2 cutsheet

light source

mains voltage halogen, operating voltage 230 V
max. 2 x 100 W, B15d Eco,
energy efficiency grade D, lifetime 2.000 h

luminous flux (bulb)

60 W / 980 lm, 70 W / 1180 lm, 100 W / 1800 lm

color temperature / color rendering

2900 K / CRI 100

weight

body and reflector head max. 1,8 kg

mounting accessories


for surface or recessed mounting, see p.3

cutsheet

Occhio

2|3



Puro filo doppio
recommended lighting effect

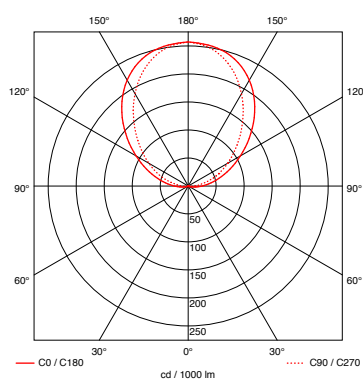

Puro B
reflector head for diffuse light
in one direction

efficiency of reflector head
67%

material / surface
satinised, heat-resistant glass
reflector matt chrome or chrome
fixture matt chrome or chrome

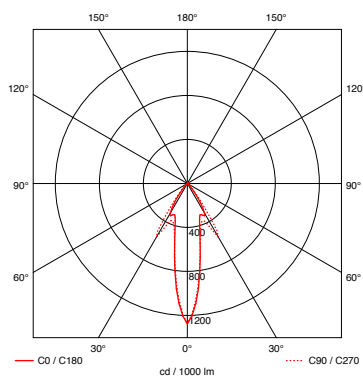
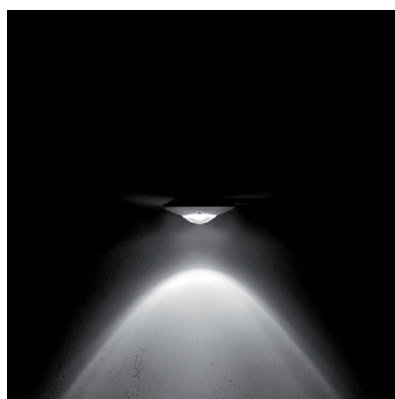


Puro C
reflector head for directed light
in one direction

efficiency of reflector head
54%

beam angle
approx. 65°

material / surface
lense optical glass
reflector matt chrome or chrome
fixture matt chrome or chrome

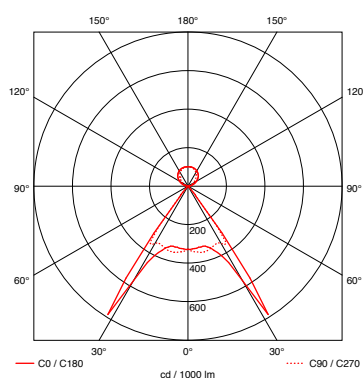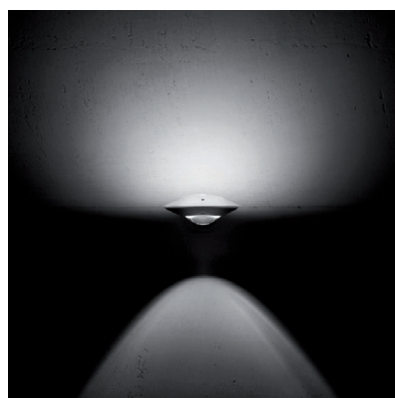

Puro E
reflector head for diffuse light in one direction
and directed light in the other direction

efficiency of reflector head
76%

beam angle
approx. 65°


material / surface
lense optical glass
satinised, heat-resistant glass
fixture matt chrome or chrome

cutsheet

Occhio

3|3





Puro filo doppio Item numbers

		Item number _matt chrome M _chrome C
filo doppio 	max. 2 x 100W mains voltage halogen B15d, cable length 3,5 m	8H 36 00 _
	version with 7 m cable length	8H 76 00 _
	version without mounting plate for cable + cable guidance for track adapter	8H 32 00 _
	version with 7 m cable length	8H 72 00 _



Puro B		satinised glass / reflector sphere	8K 00 12 _
Puro C		reflector sphere/ lense (max. 100 W) with diffusor*	8K 00 41 _
Puro E		satinised glass / lense (max. 100 W) with diffusor*	8K 00 44 _



flat box		for plastering or wall / ceiling box h 8 mm, ø 80 mm	8Z 00 00 _
spacing box		for surface mounting h 22 mm, ø 80 mm	8Z 01 00 _
		with hole for external cable supply h 22 mm, ø 80 mm	8Z 03 00 _
canopy incl. 1 cable guidance			8H 04 00 _
canopy incl. 1 cable guidance			
cable guidance			8H 05 00 _
track adapter*		for 3 phase track	8H 01 20 _
		silver white black	4H 06 00 _M 4H 06 00 _W 4H 06 00 _S

* Diffusor necessary for ideal light distribution when using clear mains voltage halogen B15d bulb and lens

* also available in 1 phase track version for the same price, item no. 4F __ 00 __ 1

status 10 / 2014 | subject to alterations and technical change | all dimensions in mm

Occhio GmbH | Wiener Platz 7 | 81667 München | Tel +49-89-44 77 86 30 | Fax +49-89-44 77 86 39 | info@occhio.de