

Puro filo singolo low voltage halogen

Suspended luminaire - modular system consisting of body and head

Thanks to its unique modularity the Occhio head-body system delivers impressive lighting solutions for your room. For different lighting effects diverse, turnable reflector heads are available, which can be easily substituted at any time thanks to a simple plug-in mechanism. The diverse wall and ceiling boxes allow for all recessed and surface mounting options.


Suspended luminaire Occhio Puro filo singolo consisting of

body Occhio filo singolo - different length and surfacees
head Occhio Puro - different lighting effects and surfacees
Occhio accessories - different mounting options and surfacees

IP 20     



Puro filo singolo E

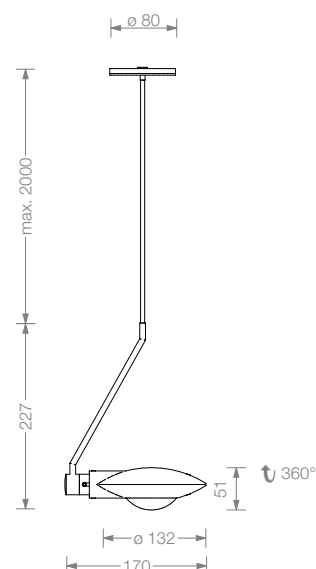

Puro filo singolo E

material
aluminium, brass, steel, glass

surface
head: chrome, aluminium anodised
body: chrome, matt chrome

length of cable
cable length max. 200 cm

recommended lighting effects
B, C, E see p.2 cutsheet

light source
low voltage halogen, operating voltage 12 V
max. 60W, GY6.35
energy efficiency grade B, lifetime 4.000 h

luminous flux (bulb)
35 W / 860 lm, 50 W / 1180 lm, 60 W / 1650 lm

color temperature / color rendering
3000 K / CRI 100

weight
body and reflector head max. 1,1 kg


mounting accessories
for surface or recessed mounting, see p.3

cutsheet

Occhio

2|3



Puro filo singolo
recommended lighting effect

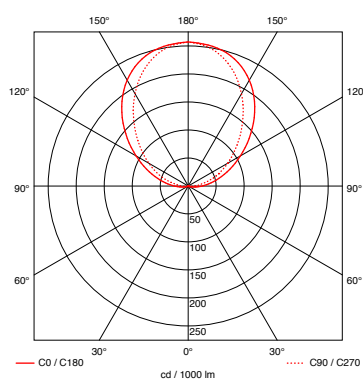

Puro B
reflector head for diffuse light
in one direction

efficiency of reflector head
67%

material / surface
satinised, heat-resistant glass
reflector matt chrome or chrome
fixture matt chrome or chrome

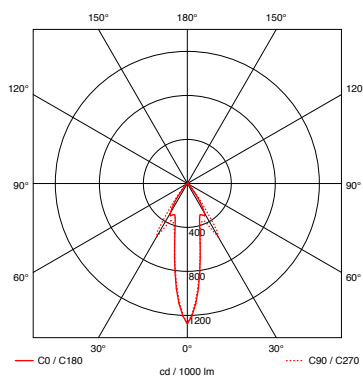
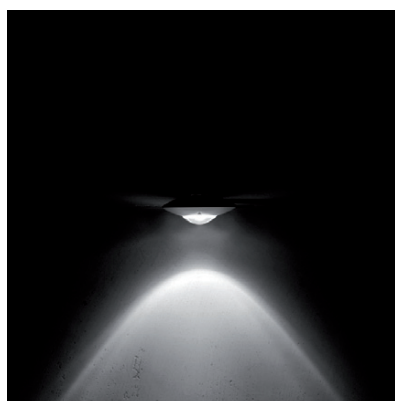


Puro C
reflector head for directed light
in one direction

efficiency of reflector head
54%

beam angle
approx. 65°

material / surface
lense optical glass
reflector matt chrome or chrome
fixture matt chrome or chrome

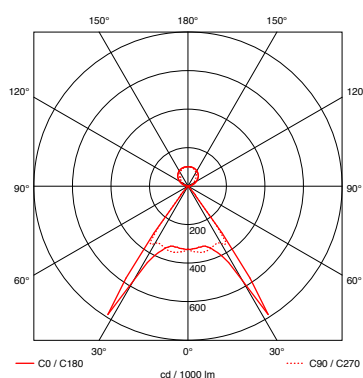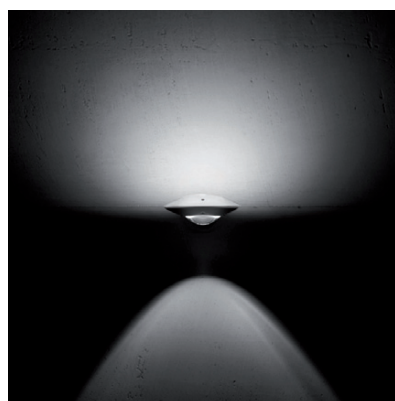

Puro E
reflector head for diffuse light in one direction
and directed light in the other direction

efficiency of reflector head
76%

beam angle
approx. 65°

material / surface
lense optical glass
satinised, heat-resistant glass
fixture matt chrome or chrome

cutsheet


Occhio

3/3

Puro filo singolo Item numbers

Item number
_matt chrome M
_chrome C

filo singolo



max. 60 W
low voltage hallogen GY6.35
length of cable 2m

7H 35 00 _



Puro B



satinised glass/reflector sphere

8K 00 12 _

Puro C



reflector sphere/ lense

7K 00 41 _

Puro E



satinised glass// lense

7K 00 44 _



mounting transformer on site


flat box



for plastering or wall/ ceiling box
h 8 mm, ø 80 mm

8Z 00 00 M
8Z 00 00 C

Electronic transformer max. 150 W



for mounting in cavity walls/ ceilings,
trailing- or leading-edge dimmable,
50 – 150 W,
l 153 mm, w 54 mm, h 36 mm

7Z 00 03 T

Electronic transformer max. 105 W



for mounting in cavity walls/ ceilings,
trailing- or leading-edge dimmable,
35 – 105 W,
l 107 mm, w 52 mm, h 30 mm

7Z 00 01 T

Electronic transformer max. 70 W



for mounting in flush-mounted boxes (wall/ cei-
ling), not for verticale on
ceiling, not for plastering box ceiling,
trailing- or leading-edge dimmable, 20 – 70 W,
ø 53 mm, h 22 mm

7Z 00 02 T



transformer in surface mounted box

Box singolo



mounting version
incl. electronic transformer
35 – 75 W
176 mm, w 88 mm, h 28 mm

matt chrome	7Z 40 10 M	F
chrome	7Z 40 10 C	F
bianco / chrome	7Z 40 10 B	F
nero / chrome	7Z 40 10 N	F



track version

matt chrome	4Z 40 10 M	F
chrome	4Z 40 10 C	F
bianco / chrome	4Z 40 10 B	F
nero / chrome	4Z 40 10 N	F