




Puro letto mains voltage halogen

Wall luminaire - modular system consisting of body and head

Thanks to its unique modularity the Occhio head-body system delivers impressive lighting solutions for your room. For different lighting effects diverse, turnable reflector heads are available, which can be easily substituted at any time thanks to a simple plug-in mechanism. The diverse wall and ceiling boxes allow for all recessed and surface mounting options.

Wall luminaire Occhio Puro letto consisting of

- body Occhio letto - different length and surfaceces
- head Occhio Puro - different lighting effects and surfaceces
- Occhio accessories - different mounting options and surfaceces

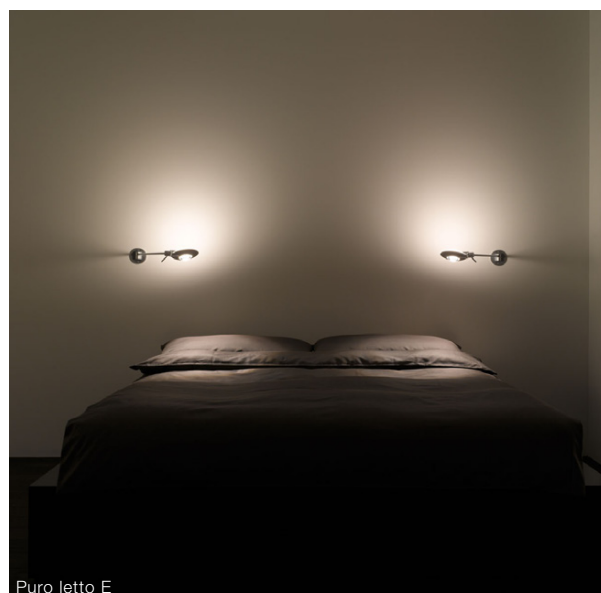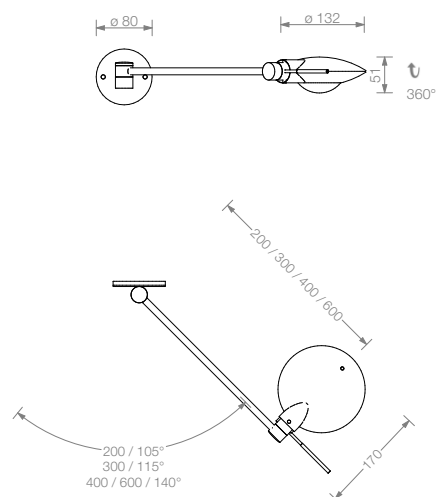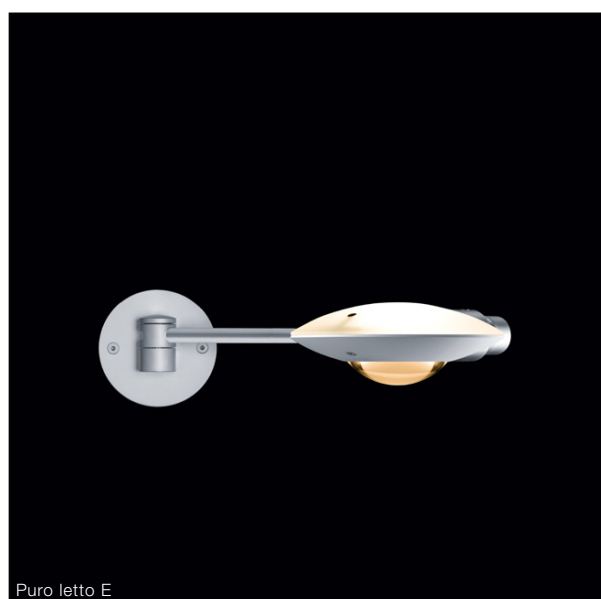

material

aluminium, brass, steel, glass

surface

head: chrome, aluminium anodised
body: chrome, matt chrome

length / travel

20 cm / 105°, 30 cm / 115°, 40 cm / 140° und 60 cm / 140°

recommended lighting effects

B,C, E see p.2 cutsheet

light source

high voltage hallogen, operating voltage 230 V
60 / 70 W, B15d Eco,
energy efficiency grade D, lifetime 2.000 h

luminous flux (bulb)

60 W / 980 lm, 70 W / 1180 lm

color temperature / color rendering

2900 K / CRI 100

weight

body and reflector head max. 1,2 kg

mounting accessories


for surface or recessed mounting, see p.3 cutsheet

cutsheet

Occhio

2 | 3



Puro letto
recommended lighting effect

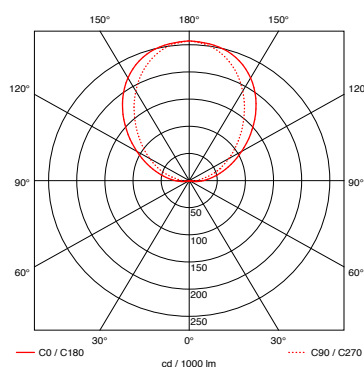

Puro B
reflector head for diffuse light
in one direction

efficiency of reflector head
67%

material / surface
satinised, heat-resistant glass
reflector matt chrome or chrome
fixture matt chrome or chrome

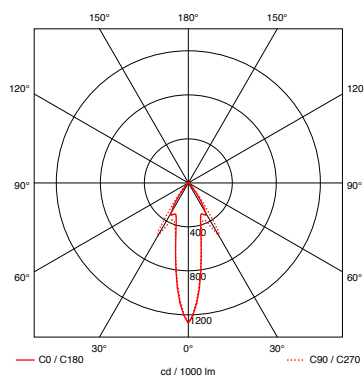
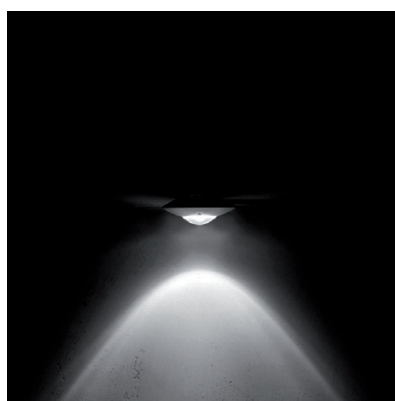


Puro C
reflector head for directed light
in one direction

efficiency of reflector head
54%

beam angle
approx. 65°

material / surface
lense optical glass
reflector matt chrome or chrome
fixture matt chrome or chrome

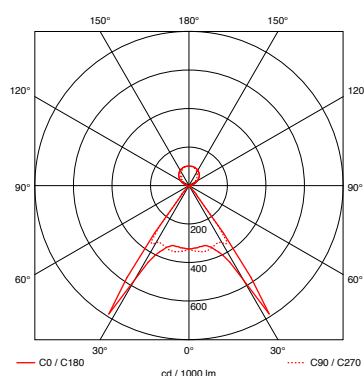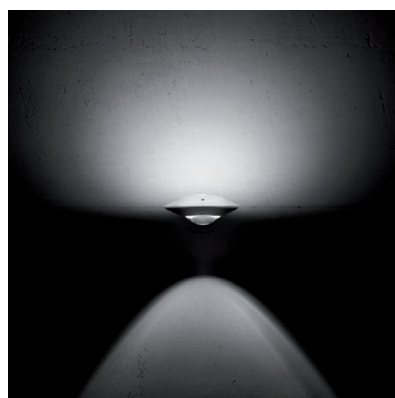

Puro E
reflector head for diffuse light
in one direction and directed light
in the other direction

efficiency of reflector head
76%

beam angle
approx. 65°

material / surface
lense optical glass
satinised, heat-resistant glass
fixture matt chrome or chrome

cutsheet


Occhio

3|3

Puro letto
Item numbers

Item number
_matt chrome M
_chrome C

letto



max. 75 W
mains voltage halogen B15d

20 cm	8B 11 00 _ L/R
30 cm	8B 12 00 _ L/R
40 cm	8B 13 00 _ L/R
60 cm	8B 14 00 _ L/R




Puro B



reflector / satinised glass

8 K 00 12 _


Puro C



reflector sphere / lense
(max. 100 W) with diffusor*

8 K 00 41 _

Puro E




satinised glass / lense
(max. 100 W) with diffusor*

8 K 00 44 _



flat box



for plastering or wall / ceiling box
h 8 mm, ø 80 mm


8Z 00 00 _

spacing box



for surface mounting
h 22 mm, ø 80 mm

8Z 01 00 _



with hole for external cable supply
h 22 mm, ø 80 mm

8Z 03 00 _

cord dimmer



with transparent connector cable,
cable length 150 / 150 cm,
for use with spacing box with
hole for external cable supply

8B 00 00 T

* Diffusor necessary for ideal light distribution when using clear mains voltage halogen B15d bulb and lens