



Puro parete doppio mains voltage halogen

Wall luminaire - modular system consisting of body and head

Thanks to its unique modularity the Occhio head-body system delivers impressive lighting solutions for your room. For different lighting effects diverse, turnable reflector heads are available, which can be easily substituted at any time thanks to a simple plug-in mechanism. The diverse wall and ceiling boxes allow for all recessed and surface mounting options.

Wall luminaire Occhio Puro parete doppio consisting of

- body Occhio parete doppio - different length and surfaceces
- head Occhio Puro - different lighting effects and surfaceces
- Occhio accessories - different mounting options and surfaceces

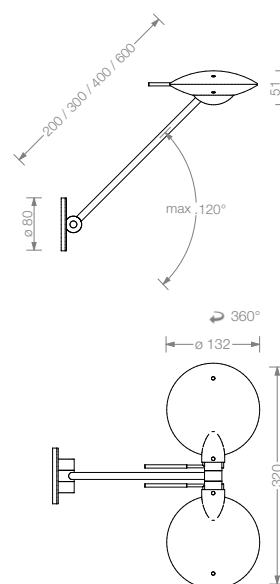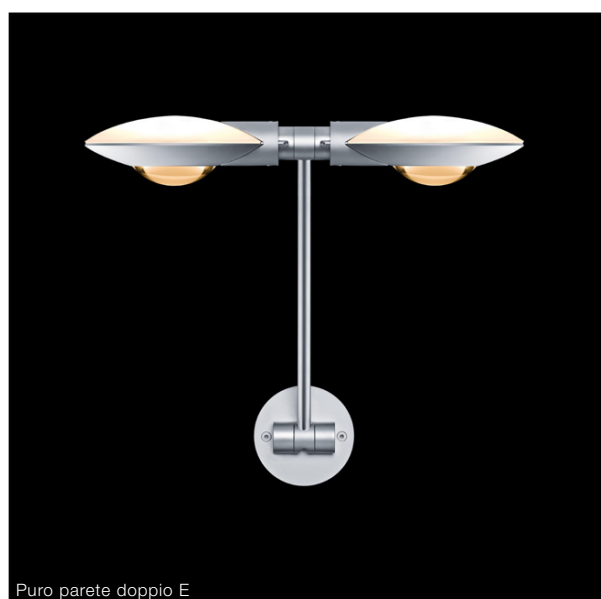

material
aluminium, brass, steel, glass

surface
head: chrome, aluminium anodised
body: chrome, matt chrome

length / travel
20 cm, 30 cm, 40 cm, 60 cm / 120°

recommended lighting effects
A, B, C, D, E, P, Q, U see p.2 and p.3 cutsheet

light source
mains voltage halogen, operating voltage 230 V
max. 2 x 150 W, B15d Eco,
(max. 100 W for lighting effects C, D und E)
energy efficiency grade D, lifetime 2.000 h



luminous flux (bulb)
60 W / 980 lm, 70 W / 1180 lm, 100 W / 1800 lm, 150 W / 2870 lm

color temperature / color rendering
2900 K / CRI 100

weight
body and reflector head max. 2,0 kg

mounting accessories
for surface or recessed mounting, see p.5 cutsheet



Puro parete doppio recommended lighting effect

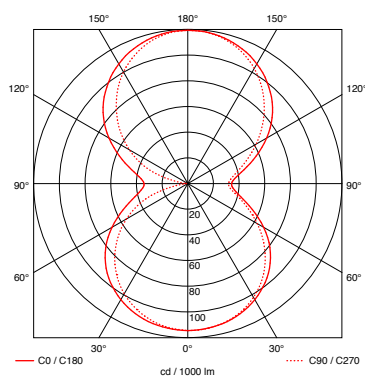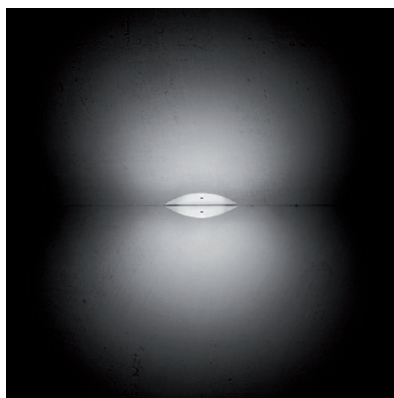

Puro A
reflector head for diffuse light
in two directions

efficiency of reflector head
84%


material / surface
satinised, heat-resistant glass
fixture matt chrome or chrome

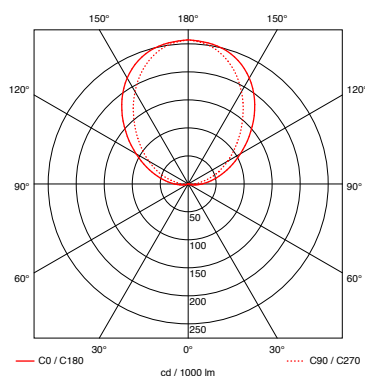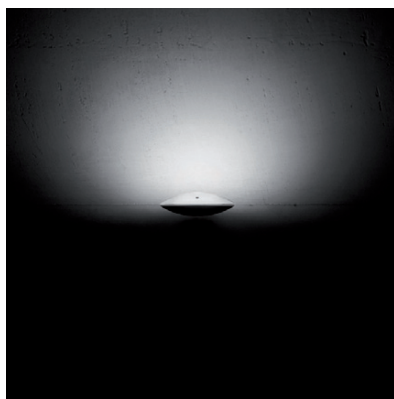

Puro B
reflector head for diffuse light
in one direction

efficiency of reflector head
67%

material / surface
satinised, heat-resistant glass
reflector matt chrome or chrome
fixture matt chrome or chrome


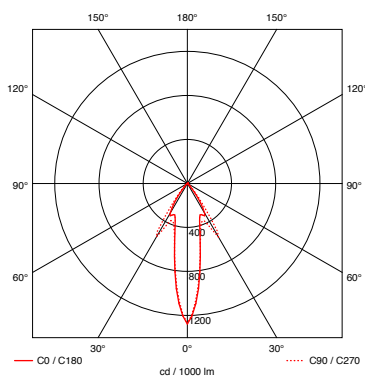


Puro C
reflector head for directed light
in one direction

efficiency of reflector head
54%

beam angle
approx. 65°

material / surface
lense optical glass
reflector matt chrome or chrome
fixture matt chrome or chrome

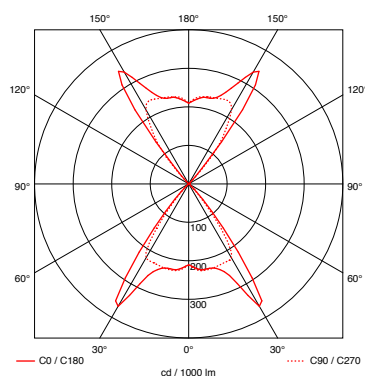
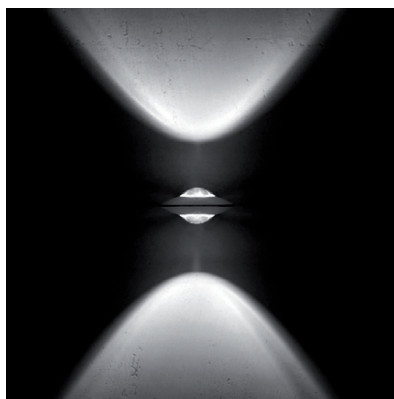


Puro D
reflector head for directed light
in two directions

efficiency of reflector head
68%

material / surface
lense optical glass
fixture matt chrome or chrome

Puro parete doppio recommended lighting effect

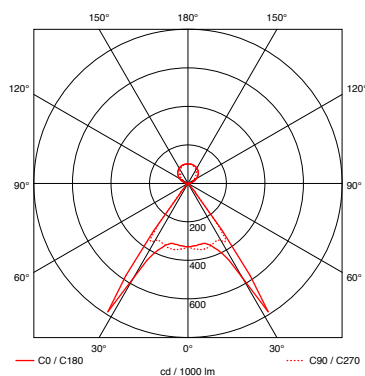
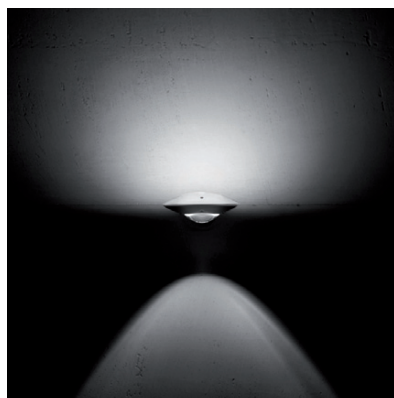


Puro E
reflector head for diffuse light
in one direction and directed light
in the other direction

efficiency of reflector head
76%

beam angle
approx. 65°



material / surface
lense optical glass
satinised, heat-resistant glass
fixture matt chrome or chrome

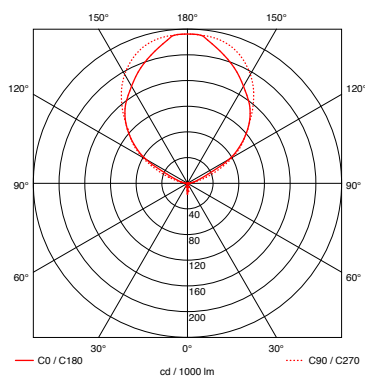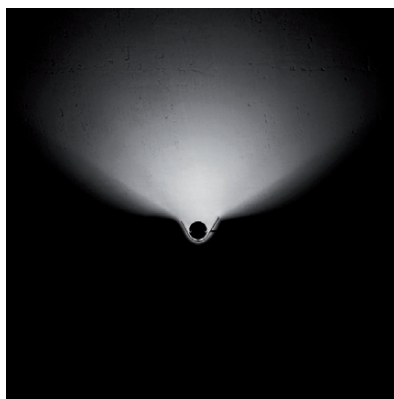

Puro P
reflector head for diffuse light in a symmetri-
cal direction

efficiency of reflector head
55%



material / surface
reflector matt chrome or chrome
fixture matt chrome or chrome

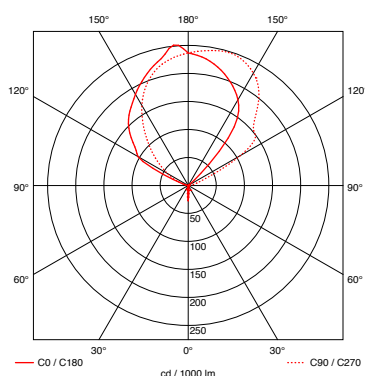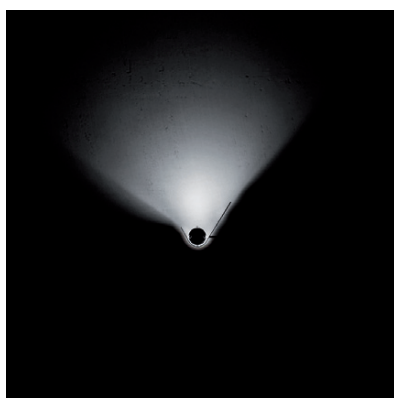

Puro Q
reflector head for diffuse asymmetric light in
one direction

efficiency of reflector head
52%

material / surface
reflector matt chrome or chrome
fixture matt chrome or chrome

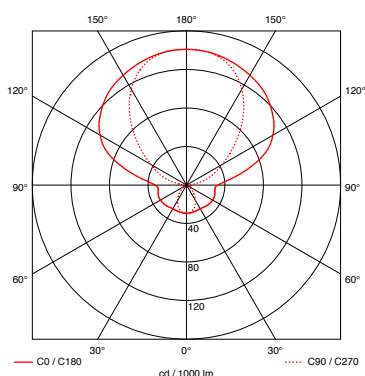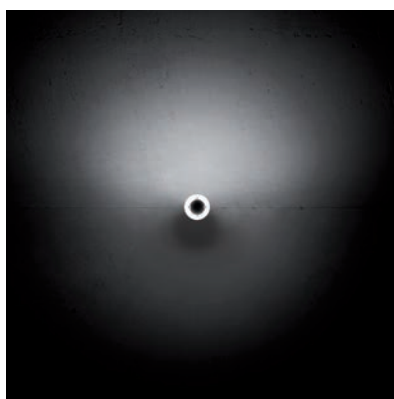

Puro U
reflector head for diffuse symmetric light in
one direction

efficiency of reflector head
55%

material / surface
satinised, heat-resistant glass
aluminium perforated reflector
matt chrome or chrome
fixture matt chrome or chrome

cutsheet

Occhio

4 | 5

Puro parete doppio

Item numbers

Item number
_matt chrome M
_chrome C

parete doppio



max. 2 x 150 W
mains voltage halogen B15d

20 cm
30 cm
40 cm
60 cm

8P 21 00 _
8P 22 00 _
8P 23 00 _
8P 24 00 _



Puro A



satinised glass / satinised glass

8 K 00 11 _


Puro B



satinised glass / reflector sphere

8 K 00 12 _


Puro C



reflector sphere / lense
(max. 100 W) mit diffusor*

8 K 00 41 _


Puro D



lense / lense
(max. 100 W) with diffusor*

8 K 00 42 _


Puro E



satinised glass / lens
(max. 100 W) with diffusor*

8 K 00 44 _

Puro P



reflector tray, symmetrical

8 K 00 21 _

Puro Q



reflector tray, asymmetrical
left version
right version

8 K 00 22 M
8 K 00 22 C
8 K 00 22 M R
8 K 00 22 C R

Puro U



satinised glass, perforated aluminium
reflector

8 K 00 32 _

* Diffusor necessary for ideal light distribution when using clear mains voltage halogen B15d bulb and lens

cutsheet

Occhio

5 | 5

Puro parete doppio
Item numbers

Item number
_matt chrome M
_chrome C



flat box			
		for plastering or wall / ceiling box h 8 mm, ø 80 mm	8Z 00 00 _
spacing box			
		for surface mounting h 22 mm, ø 80 mm	8Z 01 00 _
		with hole for external cable supply h 22 mm, ø 80 mm	8Z 03 00 _
		with switch h 22 mm, ø 80 mm	8Z 04 00 _