

cutsheet

Occhio

1 | 5

Puro parete singolo low voltage halogen

Wall luminaire - modular system consisting of body and head

Thanks to its unique modularity the Occhio head-body system delivers impressive lighting solutions for your room. For different lighting effects diverse, turnable reflector heads are available, which can be easily substituted at any time thanks to a simple plug-in mechanism. The diverse wall and ceiling boxes allow for all recessed and surface mounting options.


Wall luminaire Occhio Puro parete singolo consisting of

- body Occhio parete singolo - different length and surfaces
- head Occhio Puro - different lighting effects and surfaces
- Occhio accessories - different mounting options and surfaces

IP 20



Puro parete singolo C

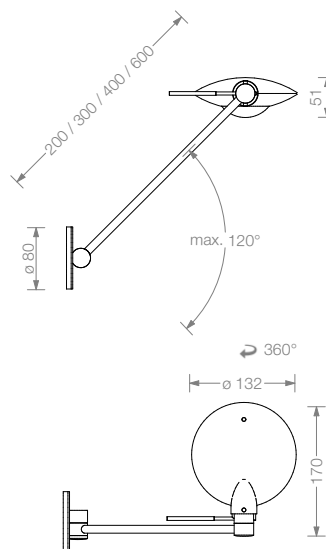

Puro parete singolo E

material

aluminium, brass, steel, glass

surface

head: chrome, aluminium anodised
body: chrome, matt chrome

length / travel

20 cm, 30 cm, 40 cm, 60 cm / 120°

recommended lighting effects

A, B, C, D, E, P, Q, U see p.2 and p.3 cutsheet

light source

low voltage halogen, operating voltage 12 V
max. 60W, GY6.35, energy efficiency grade B, lifetime 4.000 h

luminous flux (bulb)

35 W / 860 lm, 50 W / 1180 lm, 60 W / 1650 lm

color temperature / color rendering

3000 K / CRI 100



weight

body and reflector head max. 1,5 kg

mounting accessories

for surface or recessed mounting, see p.5 cutsheet


Puro parete singolo recommended lighting effect

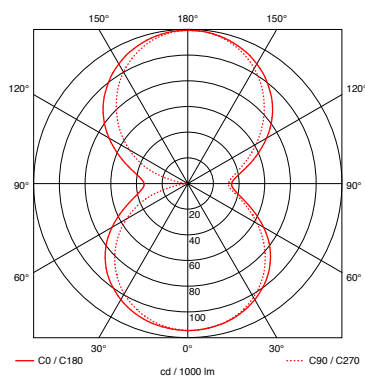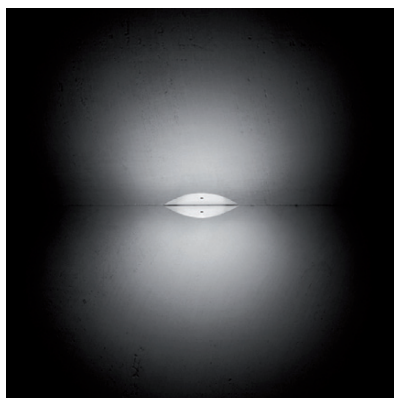

Puro A
reflectorhead for diffuse light
in two directions

efficiency of reflector head
84%



material / surface
reflector matt chrome or chrome
fixture matt chrome or chrome

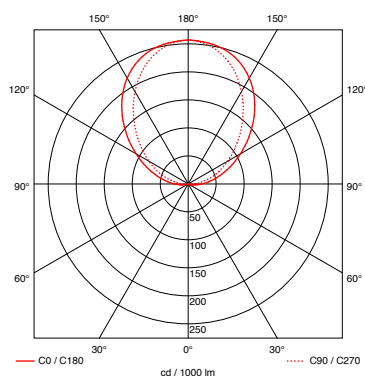

Puro B
reflector head for diffuse light
in one direction

efficiency of reflector head
67%

material / surface
satinised, heat-resistant glass
reflector matt chrome or chrome
fixture matt chrome or chrome

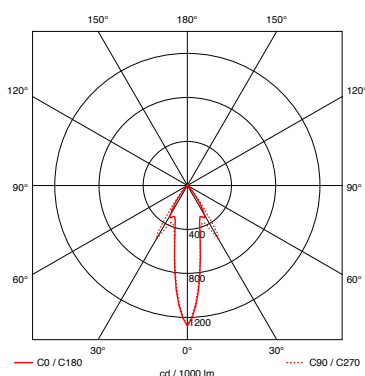
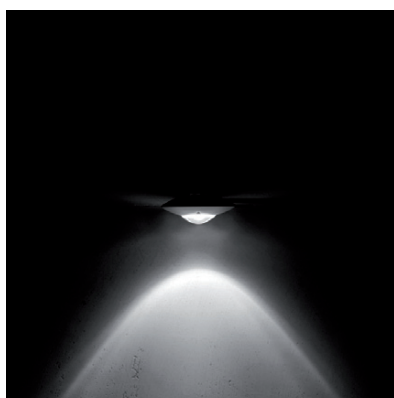


Puro C
reflector head for directed light
in one direction

efficiency of reflector head
54%

beam angle
approx. 65°

material / surface
lens optical glass
reflector matt chrome or chrome
fixture matt chrome or chrome

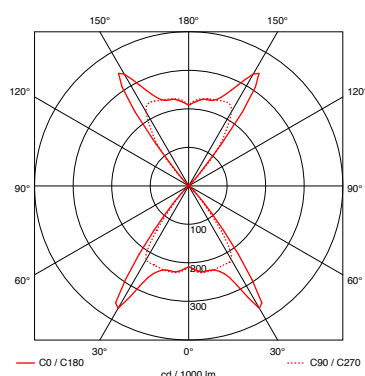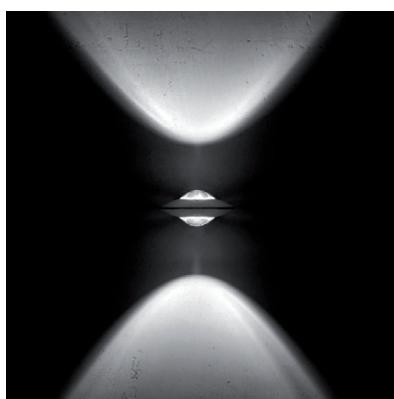

Puro D
reflector head for directed light
in two directions

efficiency of reflector head
68%



material / surface
lens optical glass
fixture matt chrome or chrome

cutsheet

Occhio

3 | 5

Puro parete singolo
recommended lighting effect

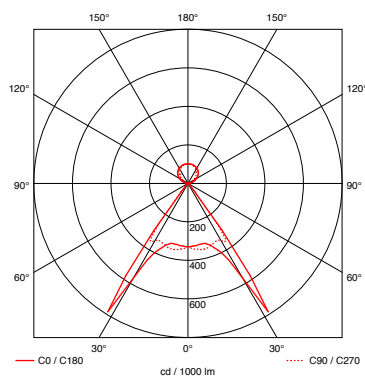
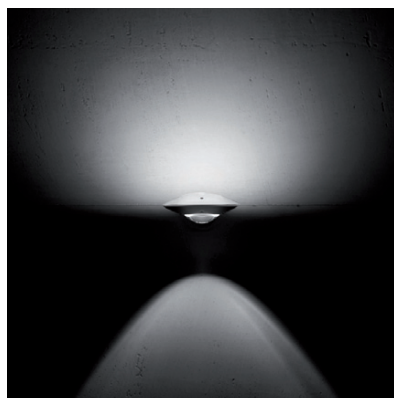


Puro E
reflector head for diffuse light
in one direction and directed light
in the other direction

efficiency of reflector head
76%

beam angle
approx. 65°



material / surface
lens optical glass
satinised, heat-resistant glass
fixture matt chrome or chrome

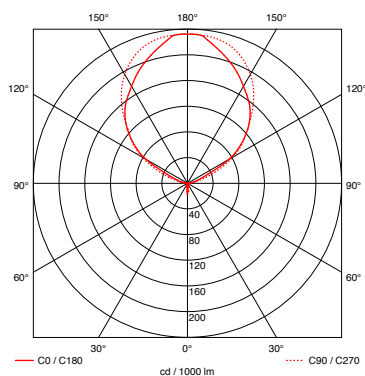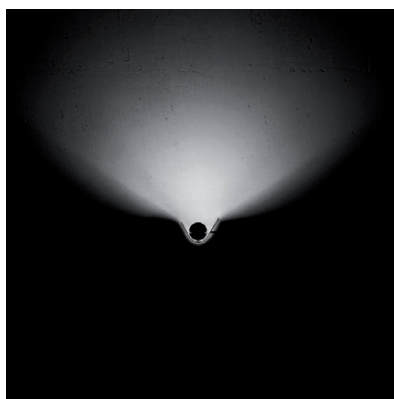

Puro P
reflector head for diffuse light in a symmetri-
cal direction

efficiency of reflector head
55%



material / surface
reflector chrome matt or chrome
fixture matt chrome or chrome

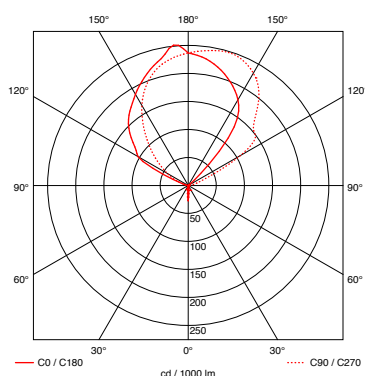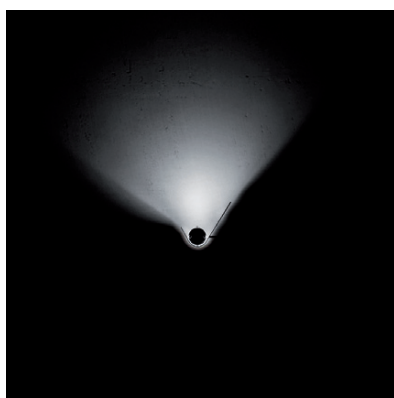

Puro Q
reflector head for diffuse asymmetric light in
one direction

efficiency of reflector head
52%

material / surface
reflector chrome matt or chrome
fixture matt chrome or chrome

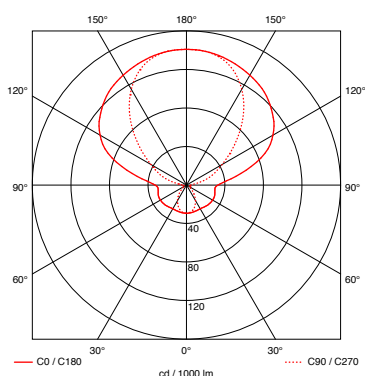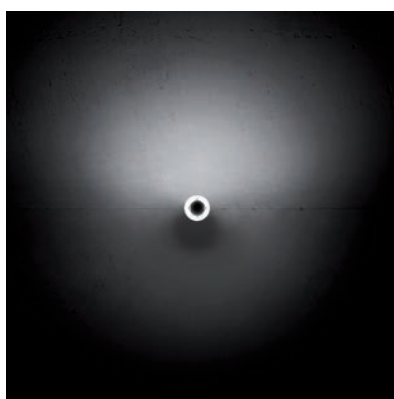

Puro U
reflector head for diffuse symmetric light in
one direction

efficiency of reflector head
55%

material / surface
satinised, heat-resistant glass
reflector matt chrome or chrome
fixture matt chrome or chrome

cutsheet

Occhio

4 | 5

Puro parete singolo Item numbers

Item number
_matt chrome M
_chrome C

parete singolo



max. 60 W
low voltage halogen GY6.35

20 cm
30 cm
40 cm
60 cm

7P 11 00 _
7P 12 00 _
7P 13 00 _
7P 14 00 _



Puro A



satinised glass / satinised glass

8 K 00 11 _


Puro B



satinised glass / reflector sphere

8 K 00 12 _


Puro C



reflector sphere / lense

7 K 00 41 _

Puro D



lense / lense

7 K 00 42 _


Puro E



satinised glass / lens

7 K 00 44 _

Puro P



reflector tray, symmetrical

8 K 00 21 _

Puro Q



reflector tray, asymmetrical
left version
right version

8 K 00 22 M
8 K 00 22 C
8 K 00 22 M R
8 K 00 22 C R

Puro U




satinised glass, perforated aluminium
reflector

8 K 00 32 _

Puro parete singolo
Item numbers

Item number
_matt chrome M
_chrome C



mounting transformer on site		
flat box		
		for plastering or wall / ceiling box h 8 mm, ø 80 mm
		8Z 00 00 M 8Z 00 00 C
Electronic transformer max. 150 W		
		for mounting in cavity walls / ceilings, trailing- or leading-edge dimmable, 50 – 150 W, l 153 mm, w 54 mm, h 36 mm
		7Z 00 03 T
Electronic transformer max. 105 W		
		for mounting in cavity walls / ceilings, trailing- or leading-edge dimmable, 35 – 105 W, l 107 mm, w 52 mm, h 30 mm
		7Z 00 01 T
Electronic transformer max. 70 W		
		for mounting in flush-mounted boxes (wall / ceiling), not for verticale on ceiling, not for plastering box ceiling, trailing- or leading-edge dimmable, 20 – 70 W, ø 53 mm, h 22 mm
		7Z 00 02 T



transformer in surface mounted box		
Box singolo		
		mounting version incl. electronic transformer 35 – 75 W 176 mm, w 88 mm, h 28 mm
		track version
matt chrome		
	7Z 40 10 M	F
chrome		
	7Z 40 10 C	F
bianco / chrome		
	7Z 40 10 B	F
nero / chrome		
	7Z 40 10 N	F
matt chrome		
	4Z 40 10 M	F
chrome		
	4Z 40 10 C	F
bianco / chrome		
	4Z 40 10 B	F
nero / chrome		
	4Z 40 10 N	F