

Sento parete singolo low voltage halogen

Wall luminaire - modular system consisting of body and head

Thanks to its unique modularity the Occhio head-body system delivers impressive lighting solutions for your room. For different lighting effects diverse, turnable reflector heads are available, which can be easily substituted at any time thanks to a simple plug-in mechanism. The diverse wall and ceiling boxes allow for all recessed and surface mounting options.


Wall luminaire Occhio Sento parete singolo consisting of

- body Occhio parete singolo - different surfaces
- head Occhio Sento - different lighting effects and surfaces
- Occhio accessories - different mounting options and surfaces

IP 20     



Sento parete singolo E

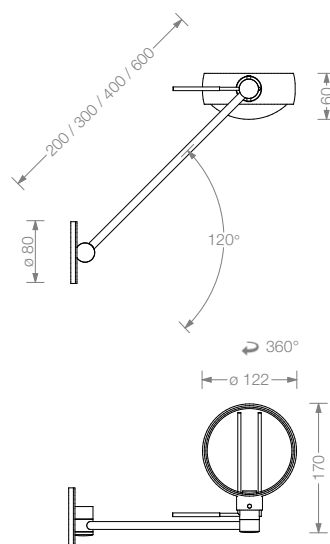

material

aluminium, brass, steel, glass

surface

head: see p.2 and p.3 cutsheet
body: chrome, chrome matt

length / travel

20 cm, 30 cm, 40 cm, 60 cm / 120°
length incl. reflector head and mounting box

recommended lighting effects

A, B, C, D, E see p.2 and p.3 cutsheet

light source

low voltage halogen, operating voltage 12 V
max. 60 W IRC, GY6.35,
energy efficiency grade B, lifetime 4.000 h

luminous flux (bulb)

35 W / 860 lm, 50 W / 1180 lm, 60 W / 1650 lm

color temperature / color rendering

3000 K / CRI 100

weight

body + head max. 1,6 kg

mounting accessories



for surface or recessed mounting, see p.5 cutsheet

cutsheet

Occhio

2 | 5

Sento parete singolo recommended lighting effects

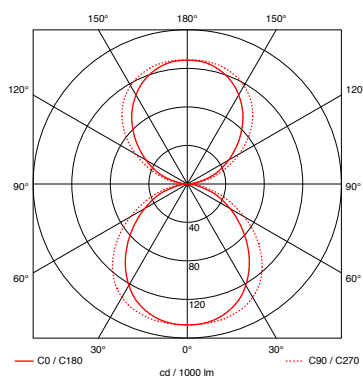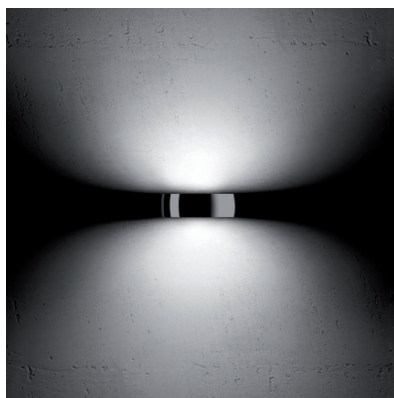

Sento A (satinised glass / satinised glass)
reflector head for diffuse light
in both directions

luminous efficiency

79%

glass



satinised, heat-resistant glass

ring / cover

chrome, matt chrome
white or black glossy finished
(bianco, nero)

holder

chrome or matt chrome

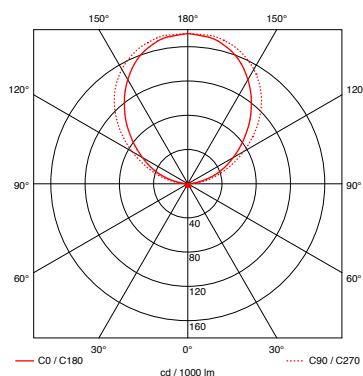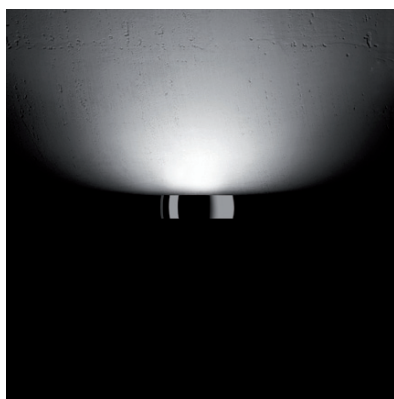

Sento B (satinised glass / cover)
reflector head for diffuse light
in one direction

luminous efficiency

49%

glass


satinised, heat-resistant glass

ring / cover

chrome, matt chrome
white or black glossy finished
(bianco, nero)

holder

chrome, matt chrome

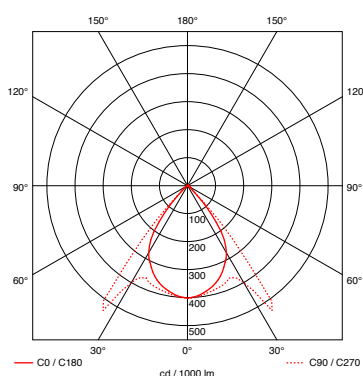

Sento C (cover / lense)
reflector head for directed light
in one direction

luminous efficiency

56%

beam angle

approx. 85°

lense



optical glass

ring / cover

chrome, matt chrome,
white or black glossy finished
(bianco, nero)

holder

chrome oder matt chrome

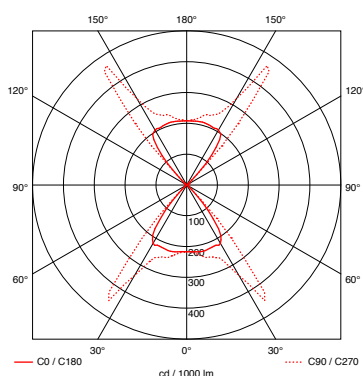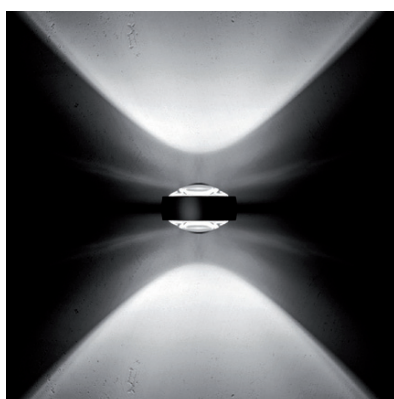

Sento D (lense / lense)
reflector head for directed light
in both directions

luminous efficiency

82%

beam angle

approx. 85°

lense

optical glass

ring

chrome, matt chrome,
white or black glossy finished
(bianco, nero)

holder


chrome or matt chrome

cutsheet

Occhio

3|5

Sento parete singolo
recommended lighting effects

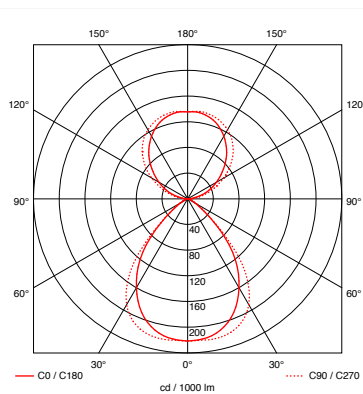

Sento E (satinised glass / lense)
reflector head for diffuse light in one and
directed light in the other direction

luminous efficiency

83%

beam angle

approx. 85°

glass

satinised, heat-resistant glass

lense

optical glass

ring

chrome, matt chrome,
white or black glossy finished
(bianco, nero)

holder

chrome or matt chrome

Sento parete singolo Item numbers

Item number
_matt chrome M
_chrome C

parete singolo




max. 60 W
low voltage halogen, GY6.35

20 cm
30 cm
40 cm
60 cm

7P 11 00 _
7P 12 00 _
7P 13 00 _
7P 14 00 _



Sento A




satinised glass / satinised glass

matt chrome
chrom
bianco
nero

8K 00 71 M
8K 00 71 C
8K 00 71 B
8K 00 71 N

Sento B




satinised glass / cover

matt chrome
chrom
bianco
nero

8K 00 72 M
8K 00 72 C
8K 00 72 B
8K 00 72 N

Sento C




cover / lense

matt chrome
chrom
bianco
nero

7K 00 63 M
7K 00 63 C
7K 00 63 B
7K 00 63 N

Sento D




lense / lense

matt chrome
chrom
bianco
nero

7K 00 64 M
7K 00 64 C
7K 00 64 B
7K 00 64 N

Sento E



satinised glass / lense

matt chrome
chrom
bianco
nero


7K 00 75 M
7K 00 75 C
7K 00 75 B
7K 00 75 N

Sento parete singolo
Item numbers

Item number
_chrome matt M
_chrome C



mounting transformer on site

flat box 		for plastering or wall / ceiling box h 8 mm, ø 80 mm	8Z 00 00 M 8Z 00 00 C
Electronic transformer max. 150 W  		for mounting in cavity walls / ceilings, trailing- or leading-edge dimmable, 50 – 150 W, l 153 mm, w 54 mm, h 36 mm	7Z 00 03 T
Electronic transformer max. 105 W  		for mounting in cavity walls / ceilings, trailing- or leading-edge dimmable, 35 – 105 W, l 107 mm, w 52 mm, h 30 mm	7Z 00 01 T
Electronic transformer max. 70 W   		for mounting in flush-mounted boxes (wall / ceiling), not for verticale on ceiling, not for plastering box ceiling, trailing- or leading-edge dimmable, 20 – 70 W, ø 53 mm, h 22 mm	7Z 00 02 T



transformer in surface mounted box

Box singolo  	mounting version incl. electronic transformer 35 – 75 W 176 mm, w 88 mm, h 28 mm	matt chrome 7Z 40 10 M F chrome 7Z 40 10 C F bianco / chrome 7Z 40 10 B F nero / chrome 7Z 40 10 N F
	track version	matt chrome 4Z 40 10 M F chrome 4Z 40 10 C F bianco / chrome 4Z 40 10 B F nero / chrome 4Z 40 10 N F