


lei sospeso flat pro datasheet

LED pendant luminaire with conical head. Connected to a remote constant current source (driver). Freely moveable through Occhio 3d-kinematics with two axes of rotation at an angle of 22.5° to each other, use via thermally insulated lampshade. Removable head for maintenance purposes, replaceable LED chip. Lighting effect can be changed via adjustable iris aperture, lampshade white matt, translucent. Power 9W switchable and dimmable with trailing edge phase-cut dimmer, push button, DALI or 1–10V (depends on driver). Cable rolled up in the base (can be deactivated).

The finishes of the aperture, cover, arm and base are freely configurable.

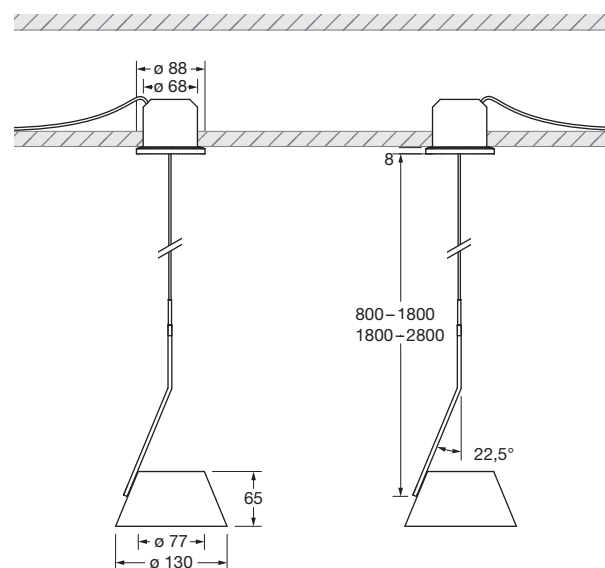

dimensions in mm


technical data lei sospeso flat pro

properties	material	aluminium, steel chrome-plated, painted or anodised, plastic, glass, stainless steel, optical plastic	
	height adjustment element	integrated in the base	
	turning range body	360° (with stop)	
	turning range head	360°	
	weight	0.6 kg	
surface	shade	matt white (translucent)	
	aperture, cover	matt gold, rose gold, bronze, shiny chrome, matt chrome, glossy white, matt white, matt black, phantom, black phantom	
	body	shiny chrome, matt chrome, matt white, matt black	
	base	shiny chrome, matt chrome, glossy white, matt white, matt black	
Occhio LED	average life time	> 50.000 hrs	
	energy efficiency class	G	
	power	9W	
	color rendering index	perfect color; CRI Ra 97	high flux; CRI Ra 85
	color temperature	2700 K, 3000 K	3000 K, 3500 K, 4000 K
	recommended use	residential and commercial	commercial
electricity	dimming	with trailing edge phase-cut dimmer*, push button, DALI or 1–10V (depends on driver)	
	power supply unit	remote, driven by constant current source max. 250 mA / > 36V DC	
	permitted operating conditions	max. 30°C for indoor use only	

* For a list of compatible dimmers, see www.occhio.de/dim_en



lei sospeso flat pro
lighting effects

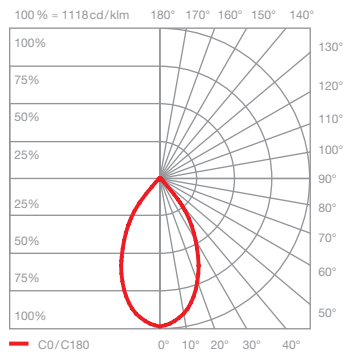

lei
directed light
beam angle approx. 60°

insert: iris

luminous flux:	perfect color	9 W	610 lm
	high flux	9 W	840 lm