

# Occhio

**price overview**  
2023|06

# culture of light

## series

X

## system

|   |                                |       |
|---|--------------------------------|-------|
|  | Mito raggio/Mito largo         | 6-7   |
|   | Mito sospeso/Mito sospeso move | 8-13  |
|   | Mito cosmo                     | 14-15 |
|   | Mito aura                      | 16-17 |
|   | Mito soffitto                  | 18-19 |
|   | Mito sfera                     | 20-21 |

|   |                                    |       |
|---|------------------------------------|-------|
|  | Mito raggio lusso/Mito largo lusso | 34-37 |
|   | Mito sospeso lusso                 | 38-41 |
|   | Mito aura lusso                    | 42-45 |
|   | Mito soffitto lusso                | 46-51 |

|   |                |       |
|---|----------------|-------|
|  | Mito terra     | 54-57 |
|   | Mito volo      | 58-65 |
|   | Mito alto      | 66-69 |
|   | Mito alto side | 70-73 |

|   |       |       |
|---|-------|-------|
|  | Gioia | 84-85 |
|---|-------|-------|

|   |        |       |
|---|--------|-------|
|  | Taglio | 90-91 |
|---|--------|-------|

L

|   |       |        |
|---|-------|--------|
|  | Sento | 96-107 |
|---|-------|--------|

|   |               |         |
|---|---------------|---------|
|  | Sento sospeso | 114-117 |
|---|---------------|---------|

|  |           |         |
|--|-----------|---------|
|  | Più/Più R | 124-139 |
|--|-----------|---------|

M

|   |               |         |
|---|---------------|---------|
|  | io spotlights | 152-159 |
|---|---------------|---------|

|   |       |         |
|---|-------|---------|
|  | io 3d | 166-169 |
|---|-------|---------|

|   |                |         |
|---|----------------|---------|
|  | lui spotlights | 176-185 |
|---|----------------|---------|

|   |        |         |
|---|--------|---------|
|  | lui 3d | 192-195 |
|---|--------|---------|

|   |        |         |
|---|--------|---------|
|  | lei 3d | 202-205 |
|---|--------|---------|

E

|   |      |         |
|---|------|---------|
|  | Sito | 212-217 |
|---|------|---------|


C

|   |            |         |
|---|------------|---------|
|  | Occhio air | 226-227 |
|---|------------|---------|

X series

# Mito

The myth of light. Sensual, mythical, aesthetic –  
Mito is the perfect symbiosis of design, innovation  
and the highest quality of light.

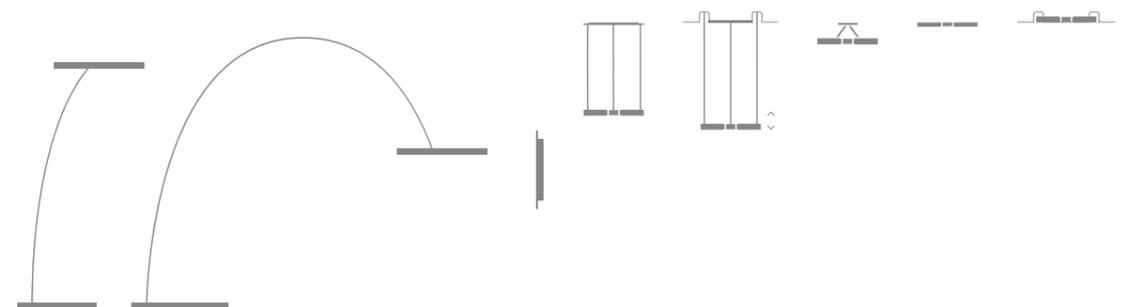

**Mito**  
arc luminaires



raggio

height 205 cm  
ø head 60 cm, 60 W (3330 lm)

Ⓢ can be synced via Occhio air



largo

height head 130 cm, 145 cm, 160 cm (adjustable)  
resulting total height ca. 210–240 cm  
ø head 60 cm, 60 W (3330 lm)

Ⓢ can be synced via Occhio air

|                              |          |
|------------------------------|----------|
| <b>colors</b>                | 4.184,87 |
| <b>materials</b>             | +386,55  |
| <b>phantom/black phantom</b> | +579,83  |

|                              |          |
|------------------------------|----------|
| <b>colors</b>                | 5.865,55 |
| <b>materials</b>             | +386,55  |
| <b>phantom/black phantom</b> | +579,83  |

**control**

**features**

»color tune«, »up/down fading«, switch- and dimmable via »touchless control«, »body sensor« (only raggio), and Occhio air (included)

**Occhio air** 

Bluetooth control integrated in power supply. Features via Occhio air app or »air« controller (optional) controllable, no external dimming

**options**

**light source**

high color LED CRI 95

**2700 K–4000 K**    Ⓢ **2200 K–3500 K »x-tra warm«** +504,20

**lighting effects**

 flood

 wide

**surfaces**

**head/body+base colors**

matt white/matt white 

matt black/matt black 

matt silver/matt black 

matt gold/matt white 

matt gold/matt black 

**materials/phantom/black phantom**

rose gold/matt black 

bronze/matt black 

phantom/matt black 

black phantom/matt black 

The surfaces rose gold, bronze, phantom and black phantom may differ slightly from other product lines.

**further options** - accessories for Occhio air from page 226

These and further options can be configured at **Occhio Digital Order System (DOS)**

**further information** - technical data and information on control view pages 30–31

# Mito

## suspended luminaires sospeso 40



flat



pure



up



due

|                              | flat   | pure  | up   | due  |
|------------------------------|--|---|--|--|
| <b>fix</b>                   | pendant length adjustable during mounting, max. 350 cm                             | flush ceiling-mounted installation in hollow ceiling, incl. mounting board ø 40 cm, 40 W (2220 lm) incl. remote converter | flush ceiling-mounted installation in hollow ceiling, incl. mounting board ø 40 cm, 40 W (2220 lm) incl. converter | for surface-mounted installation ø 40 cm, 40 W (2220 lm) through-wiring possible |
| <b>variable</b>              | continuous height adjustment 50–200 cm   |   |  |  |
| <b>colors</b>                | 1.710,92   | 2.460,50  | 1.961,34   | 4.189,92   |
| <b>materials</b>             | +252,10  | 2.835,29  | +252,10  | +504,20  |
| <b>phantom/black phantom</b> | +378,15  |   | +378,15  | +756,30  |
|                              | ⊕ can be synced via Occhio air   | ⊕ can be synced via Occhio air  | ⊕ can be synced via Occhio air   | ⊕ can be synced via Occhio air   |
|                              | ⊕ special lengths up to 500 cm possible (surcharge per head +319,33, discountable) |   | ⊕ special lengths up to 500 cm possible (surcharge per head +319,33, discountable)                                 |  |

## sospeso 60




flat



pure



up

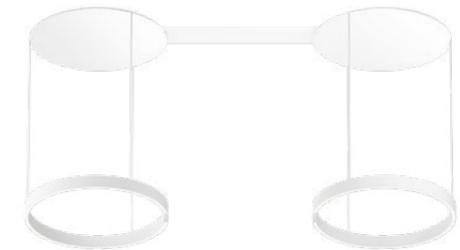

due

|                              | flat   | pure  | up   | due  |
|------------------------------|--|---|--|--|
| <b>fix</b>                   | pendant length adjustable during mounting, max. 350 cm                             | flush ceiling-mounted installation in hollow ceiling, incl. mounting board ø 60 cm, 60 W (3330 lm) incl. remote converter | flush ceiling-mounted installation in hollow ceiling, incl. mounting board ø 60 cm, 60 W (3330 lm) incl. converter | for surface-mounted installation ø 60 cm, 60 W (3330 lm) through-wiring possible |
| <b>variable</b>              | continuous height adjustment 50–200 cm   |   |  |  |
| <b>colors</b>                | 2.327,73   | 3.334,45  | 2.705,88   | 5.771,43   |
| <b>materials</b>             | +386,55  | 3.721,01  | +386,55  | +773,11  |
| <b>phantom/black phantom</b> | +579,83  |   | +579,83  | +1.159,66  |
|                              | ⊕ can be synced via Occhio air   | ⊕ can be synced via Occhio air  | ⊕ can be synced via Occhio air   | ⊕ can be synced via Occhio air   |
|                              | ⊕ special lengths up to 500 cm possible (surcharge per head +319,33, discountable) |   | ⊕ special lengths up to 500 cm possible (surcharge per head +319,33, discountable)                                 |  |


| control | features   | Mito set box  | Mito »air« box   | Mito DALI box   |
|---------|--|---|---|---|
|         | »color tune«, »up/down fading«, switch- and continuously dimmable via »touchless control« (can be deactivated) and Occhio air (optional) | features adjustable via »touchless control« (no external dimming). Alternative: color temperature 2700 K/3000 K/3500 K/4000 K and »up/down fading« adjustable, dimmable via trailing-edge phase cut dimmer (not for »x-tra warm«) | Bluetooth control integrated in cover/canopy. Features via Occhio air app or »air« controller (optional) controllable (no external dimming) | version for building control system via DALI (no »touchless control«) |
|         |  |   | +82,35  | +82,35  |

| options | light source   | lighting effects  | surfaces | head colors  | materials/phantom/black phantom                 | canopy                    |
|---------|--|---|----------|--|---|---------------------------|
|         | high color LED CRI95<br><b>2700 K–4000 K</b> with set, »air« or DALI box<br>⊕ <b>2200 K–3500 K »x-tra warm«</b> only with »air« or DALI box surcharge per head ø 40 + 336,13 ø 60 + 504,20 | <b>room</b><br>diffuse narrow<br><b>table</b><br>flood wide |          | matt white<br>matt black<br>matt silver<br>matt gold   | rose gold<br>bronze<br>phantom<br>black phantom | matt white<br>matt black* |
|         |  |   |          | *canopy in matt black (surcharge per head ø 40 + 134,45; ø 60 + 201,68; flat Version 67,23) ⊕<br>The surfaces rose gold, bronze, phantom and black phantom may differ slightly from other product lines. |   |                           |

| further options                            | further information  |
|--|--|
| - accessories for Occhio air from page 226 | - technical data, information on control and mounting options view pages 22–31 |

# Mito

## suspended luminaires sospeso move 40



move up



move pure

»magic move« electrical height adjustment  
50–200 cm

for surface-mounted installation  
incl. power supply  
ø 40 cm, 40 W (2220 lm)  
through-wiring possible

☺ can be synced via Occhio air

»magic move« electrical height adjustment  
50–200 cm

for flush ceiling-mounted installation  
incl. mounting board and power supply  
ø 40 cm, 40 W (2220 lm)  
through-wiring possible

☺ can be synced via Occhio air

|                       |          |
|-----------------------|----------|
| colors                | 2.924,37 |
| materials             | +252,10  |
| phantom/black phantom | +378,15  |

## sospeso move 60



move up



move pure

»magic move« electrical height adjustment  
50–200 cm

for surface-mounted installation  
incl. power supply  
ø 60 cm, 60 W (3330 lm)  
through-wiring possible

☺ can be synced via Occhio air

»magic move« electrical height adjustment  
50–200 cm

for flush ceiling-mounted installation  
incl. mounting board and power supply  
ø 60 cm, 60 W (3330 lm)  
through-wiring possible

☺ can be synced via Occhio air

|                       |          |
|-----------------------|----------|
| colors                | 3.680,67 |
| materials             | +386,55  |
| phantom/black phantom | +579,83  |

|         |  |
|---------|--|
| control | features   |
|         | »magic move«, »color tune«, »up/down fading«, switch- and continuously dimmable via »touchless control« (can be deactivated) and Occhio air (included) |

Occhio air (inclusive) 

Bluetooth control integrated in canopy, features controllable via Occhio air app or »air« controller (optional) (no external dimming)

| options | light source   | lighting effects  | surfaces | head colors  | materials/phantom/black phantom                 | canopy                    |
|---------|--|---|----------|--|---|---------------------------|
|         | high color LED CRI 95<br><b>2700 K–4000 K</b><br>☺ <b>2200 K–3500 K »x-tra warm«</b><br>ø 40 + 336,13<br>ø 60 + 504,20 | <b>room</b><br>diffuse<br>narrow<br><b>table</b><br>flood<br>wide |          | matt white<br>matt black<br>matt silver<br>matt gold | rose gold<br>bronze<br>phantom<br>black phantom | matt white<br>matt black* |

\*canopy in matt black (surcharge per head ø 40 + 134,45; ø 60 + 201,68) ☺  
The surfaces rose gold, bronze, phantom and black phantom may differ slightly from other product lines.

further options - accessories for Occhio air from page 226

These and further options can be configured at  
**Occhio Digital Order System (DOS)**

further information - technical data, information on control and mounting options view pages 22–31

# Mito

## suspended luminaires cosmo move 40



cosmo move

»magic move« electrical height adjustment 0–200 cm  
luminaire can be retracted flush with the ceiling

flush ceiling-mounted installation in hollow ceiling  
incl. mounting board and external power supply  
ø 40 cm, 40 W (2220 lm)  
through-wiring possible

☺ can be synced via Occhio air

|                       |          |
|-----------------------|----------|
| colors                | 3.596,64 |
| materials             | +252,10  |
| phantom/black phantom | +378,15  |

## cosmo move 60



cosmo move

»magic move« electrical height adjustment 0–200 cm  
luminaire can be retracted flush with the ceiling

flush ceiling-mounted installation in hollow ceiling  
incl. mounting board and external power supply  
ø 60 cm, 60 W (3330 lm)  
through-wiring possible

☺ can be synced via Occhio air

|                       |          |
|-----------------------|----------|
| colors                | 4.521,01 |
| materials             | +386,55  |
| phantom/black phantom | +579,83  |

|                |   |   |  |
|----------------|---|---|--|
| <b>control</b> | <b>features</b><br>»magic move«, »color tune«, »up/down fading«, switch- and continuously dimmable via »touchless control« (can be deactivated) and Occhio air (included) | <b>Applications</b><br>glow pure ceiling room table | <b>Occhio air (inclusive)</b><br>Bluetooth control integrated in canopy, features controllable via Occhio air app or »air« controller (optional) (no external dimming) |
|----------------|---|---|--|

|                |  |  |                 |  |   |   |
|----------------|--|--|-----------------|--|---|---|
| <b>options</b> | <b>light source</b><br>high color LED CRI95<br><b>2700 K–4000</b> <input type="radio"/> <b>2200 K–3500 K »x-tra warm«</b> <input checked="" type="radio"/><br>ø 40 + 336,13<br>ø 60 + 504,20 | <b>lighting effects</b><br><b>room</b><br>up: diffuse<br>down: narrow<br><b>table</b><br>up: flood<br>down: wide | <b>surfaces</b> | <b>head colors</b><br>matt white<br>matt black<br>matt silver<br>matt gold | <b>materials/phantom/black phantom</b><br>rose gold<br>bronze<br>phantom<br>black phantom | <b>light channel</b><br>matt white<br>gold matt |
|----------------|--|--|-----------------|--|---|---|

\*canopy in matt black (surcharge per head ø 40 + 134,45; ø 60 + 201,68) ☺  
The surfaces rose gold, bronze, phantom and black phantom may differ slightly from other product lines.

|                        |  |   |                            |  |
|------------------------|--|---|----------------------------|--|
| <b>further options</b> | - accessories for Occhio air from page 226 | These and further options can be configured at <b>Occhio Digital Order System (DOS)</b> | <b>further information</b> | - technical data, information on control and mounting options view pages 22–31 |
|------------------------|--|---|----------------------------|--|

# Mito

recessed ceiling luminaires  
cosmo piano 20



## cosmo piano

flush ceiling-mounted installation in hollow ceiling  
incl. mounting board and external power supply  
ø 20 cm, 20 W (850lm), through-wiring possible

|                       |          |
|-----------------------|----------|
| colors                | 1.243,70 |
| materials             | +117,65  |
| phantom/black phantom | +176,47  |

cosmo piano 40



## cosmo piano

flush ceiling-mounted installation in hollow ceiling  
incl. mounting board and external power supply  
ø 40 cm, 40 W (1700lm), through-wiring possible

|                       |          |
|-----------------------|----------|
| colors                | 1.663,87 |
| materials             | +252,10  |
| phantom/black phantom | +378,15  |

cosmo piano 60



## cosmo piano

flush ceiling-mounted installation in hollow ceiling  
incl. mounting board and external power supply  
ø 60 cm, 60 W (2400lm), through-wiring possible

|                       |          |
|-----------------------|----------|
| colors                | 2.420,17 |
| materials             | +386,55  |
| phantom/black phantom | +579,83  |

|                |  |
|----------------|--|
| <b>control</b> | <b>features</b><br>»color tune«, »up/down fading«, switch- and continuously dimmable via Occhio air (included) |
|----------------|--|

|   |
|---|
| <b>Applications</b>   |
|  glow<br> pure |

|   |
|---|
| <b>Occhio air</b> (inclusive)                    |
| Bluetooth control integrated in canopy, features controllable via Occhio air app or »air« controller (optional) (no external dimming) |

|                |  |
|----------------|--|
| <b>options</b> | <b>light source</b><br>high color LED CRI95<br><b>2700 K–4000 K</b><br><input checked="" type="radio"/> <b>2200 K–3500 K »x-tra warm«</b><br>ø 20 + 210,08<br>ø 40 + 336,13<br>ø 60 + 504,20 |
|----------------|--|

|  |  |
|--|--|
| <b>lighting effects</b>  |  |
| <b>room</b><br>up: diffuse<br>down: narrow<br> | <b>table</b><br>up: flood<br>down: wide<br> |

|                 |  |   |   |
|-----------------|--|---|---|
| <b>surfaces</b> | <b>head colors</b><br>matt white<br>matt black<br>matt silver<br>matt gold | <b>materials/phantom/black phantom</b><br>rose gold<br>bronze<br>phantom<br>black phantom | <b>light channel</b><br>matt white<br>gold matt |
|-----------------|--|---|---|

\*canopy in matt black (surcharge per head ø 40 + 134,45; ø 60 + 201,68)   
The surfaces rose gold, bronze, phantom and black phantom may differ slightly from other product lines.

**further options** - accessories for Occhio air from page 226


These and further options can be configured at **Occhio Digital Order System (DOS)**

**further information** - technical data, information on control and mounting options view pages 22–31

# Mito

wall and ceiling luminaires  
aura 40

aura 60

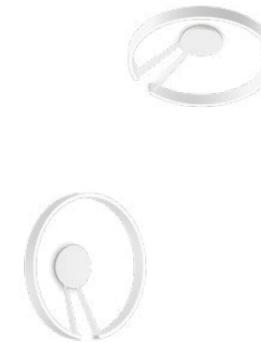

## aura

for surface-mounted installation, incl. power supply  
ø 40 cm, H 13,5 cm, 40 W (2310 lm)  
Ⓢ can be synced via Occhio air

## aura

for surface-mounted installation, incl. power supply  
ø 60 cm, H 13,5 cm, 60 W (3460 lm)  
Ⓢ can be synced via Occhio air

|                              |          |
|------------------------------|----------|
| <b>colors</b>                | 1.663,87 |
| <b>materials</b>             | +252,10  |
| <b>phantom/black phantom</b> | +378,15  |

|          |
|----------|
| 2.302,52 |
| +386,55  |
| +579,83  |

|                |   |  |  |   |
|----------------|---|--|--|---|
| <b>control</b> | <b>features</b><br>»color tune«, »up/down fading«, switch- and continuously dimmable via »touchless control« (can be deactivated) and Occhio air (optional) | <b>Mito set box</b><br>features adjustable via »touchless control« (no external dimming). Alternative: color temperature 2700 K/3000 K/3500 K/4000 K and »up/down fading« adjustable, dimmable via trailing-edge phase cut dimmer (not for »x-tra warm«) | <b>Mito »air« box</b> <br>Bluetooth control integrated in cover/canopy. Features via Occhio air app or »air« controller (optional) controllable (no external dimming) | <b>Mito DALI box</b><br>version for building control system via DALI (no »touchless control«) |
|                |   |  | +82,35   | +82,35  |

|                |  |   |                 |   |   |  |
|----------------|--|---|-----------------|---|---|--|
| <b>options</b> | <b>light source</b><br>high color LED CRI95<br><b>2700 K-4000 K</b> with set, »air« or DALI box<br>Ⓢ <b>2200 K-3500 K »x-tra warm«</b> only with »air« or DALI box<br>ø 40 +336,13<br>ø 60 +504,20 | <b>lighting effects</b><br><b>ceiling</b> diffuse narrow <b>ceiling</b> diffuse wide <b>wall</b> diffuse/wide | <b>surfaces</b> | <b>head colors</b><br>matt white<br>matt black<br>matt silver<br>matt gold                              | <b>materials/phantom/black phantom</b><br>rose gold<br>bronze<br>phantom<br>black phantom | <b>canopy/body</b><br>matt white<br>matt black |
|                |  |   |                 | The surfaces rose gold, bronze, phantom and black phantom may differ slightly from other product lines. |   |  |

|                        |  |   |                            |  |
|------------------------|--|---|----------------------------|--|
| <b>further options</b> | - accessories for Occhio air from page 226 | These and further options can be configured at <b>Occhio Digital Order System (DOS)</b> | <b>further information</b> | - technical data, information on control and mounting options view pages 22-31 |
|------------------------|--|---|----------------------------|--|

# Mito

wall and ceiling luminaires  
soffitto 20

soffitto 40



flat

for hollow ceiling  
ø 20 cm, 20 W (850 lm)  
incl. remote converter



up

for surface-mounted installation  
ø 20 cm, 20 W (850 lm)  
through-wiring possible



flat

for hollow ceiling  
ø 40 cm, 40 W (1700 lm)  
incl. remote converter



up

for surface-mounted installation  
ø 40 cm, 40 W (1700 lm)  
through-wiring possible

|                       |         |
|-----------------------|---------|
| colors                | 636,97  |
| materials             | +100,84 |
| phantom/black phantom | +151,26 |

756,30

|                       |         |
|-----------------------|---------|
| colors                | 946,22  |
| materials             | +151,26 |
| phantom/black phantom | +226,89 |

1.109,24

## soffitto 60



flat

for hollow ceiling  
ø 60 cm, 60 W (2400 lm)  
incl. remote converter



up

for surface-mounted installation  
ø 60 cm, 60 W (2400 lm)  
through-wiring possible

|                       |          |
|-----------------------|----------|
| colors                | 1.373,11 |
| materials             | +235,29  |
| phantom/black phantom | +352,94  |

1.613,45

**control** **features**  
»color tune«, switch- and continuously dimmable  
via Occhio air (optional)

**Mito set box**  
color temperature 2700 K/3000 K/3500 K/4000 K  
adjustable, dimmable via trailing-edge phase  
cut dimmer (not for »x-tra warm«)

**Mito »air« box**   
Bluetooth control integrated in cover/canopy. Features via Occhio air  
app or »air« controller (optional) controllable (no external dimming)

**Mito DALI box**  
version for building control system via DALI  
(not for soffitto 20 up)

+82,35

+82,35

|   |  |   |   |   |
|---|--|---|---|---|
| <b>options</b>  | <b>light source</b><br>high color LED CRI 95   |   |   |   |
|   | <table border="0"> <tr> <td>2700 K–4000 K<br/>with set, »air« or<br/>DALI box</td> <td>  </td> </tr> <tr> <td>  </td> <td>                 2200 K–3500 K »x-tra warm«<br/>only with »air« or DALI box<br/>ø 20 + 168,07<br/>ø 40 + 252,10<br/>ø 60 + 336,13             </td> </tr> </table> | 2700 K–4000 K<br>with set, »air« or<br>DALI box |  |  |
| 2700 K–4000 K<br>with set, »air« or<br>DALI box                                     |   |   |   |   |
|  | 2200 K–3500 K »x-tra warm«<br>only with »air« or DALI box<br>ø 20 + 168,07<br>ø 40 + 252,10<br>ø 60 + 336,13   |   |   |   |

|   |   |   |                     |        |      |      |  |   |   |
|---|---|---|---------------------|--------|------|------|--|---|---|
| <b>lighting effects</b>   |   |   |                     |        |      |      |  |   |   |
| <table border="0"> <tr> <td><b>ceiling</b></td> <td><b>ceiling</b></td> <td><b>wall to wall</b></td> </tr> <tr> <td>narrow</td> <td>wide</td> <td>wide</td> </tr> <tr> <td></td> <td></td> <td></td> </tr> </table> | <b>ceiling</b>  | <b>ceiling</b>  | <b>wall to wall</b> | narrow | wide | wide |  |  |  |
| <b>ceiling</b>  | <b>ceiling</b>  | <b>wall to wall</b>   |                     |        |      |      |  |   |   |
| narrow  | wide  | wide  |                     |        |      |      |  |   |   |
|   |  |  |                     |        |      |      |  |   |   |

**surfaces**

|  |   |   |   |   |        |   |   |         |   |   |               |   |   |   |   |
|--|---|---|---|---|--------|---|---|---------|---|---|---------------|---|---|---|---|
| <b>head colors</b>   | <b>materials/phantom/black phantom</b>  |   |   |   |        |   |   |         |   |   |               |   |   |   |   |
| <table border="0"> <tr> <td></td> <td>rose gold</td> <td></td> </tr> <tr> <td></td> <td>bronze</td> <td></td> </tr> <tr> <td></td> <td>phantom</td> <td></td> </tr> <tr> <td></td> <td>black phantom</td> <td></td> </tr> </table> |  | rose gold   |  |  | bronze |  |  | phantom |  |  | black phantom |  | <table border="0"> <tr> <td></td> </tr> <tr> <td></td> </tr> </table> |  |  |
|   | rose gold   |  |   |   |        |   |   |         |   |   |               |   |   |   |   |
|   | bronze  |  |   |   |        |   |   |         |   |   |               |   |   |   |   |
|   | phantom   |  |   |   |        |   |   |         |   |   |               |   |   |   |   |
|   | black phantom   |  |   |   |        |   |   |         |   |   |               |   |   |   |   |
|   |   |   |   |   |        |   |   |         |   |   |               |   |   |   |   |
|   |   |   |   |   |        |   |   |         |   |   |               |   |   |   |   |

\*canopy in matt black (surcharge per head ø 20 + 67,23; ø 40 + 134,45; ø 60 + 201,68; flat Version + 67,23)   
The surfaces rose gold, bronze, phantom and black phantom may differ slightly from other product lines.

**further options** - accessories for Occhio air from page 226

These and further options can be configured at  
**Occhio Digital Order System (DOS)**

**further information**

- technical data, information on control and mounting options view pages 22–31

**Mito**  
mirror luminaires  
sfera 40



sfera



sfera su



sfera corda

ø 40 cm,  
20 W (800 lm)

surface-mounted including mirror,  
including power supply

Ⓢ can be synced via Occhio air

mounting on a mirror, power supply  
behind the mirror or in recess,  
incl. power supply

Ⓢ can be synced via Occhio air

surface-mounted including mirror,  
including power supply and  
cable (3,5 m) with plug

Ⓢ can be synced via Occhio air

**colors** 1.294,12  
**materials** +168,07  
**phantom/black phantom** +252,10  
surcharge mirror  
grey tinted +67,23

cable extension (5 m)  
for power supply unit

1.073,95  
+31,93

surcharge mirror  
grey tinted

1.379,83  
+168,07  
+252,10  
+67,23

sfera 60



sfera



sfera su



sfera corda

ø 60 cm,  
40 W (1600 lm)

surface-mounted including mirror,  
including power supply

Ⓢ can be synced via Occhio air

mounting on a mirror, power supply  
behind the mirror or in recess,  
incl. power supply

Ⓢ can be synced via Occhio air

surface-mounted including mirror,  
including power supply and  
cable (3,5 m) with plug

Ⓢ can be synced via Occhio air

**colors** 1.798,32  
**materials** +252,10  
**phantom/black phantom** +378,15  
surcharge mirror  
grey tinted +84,03

cable extension (5 m)  
for power supply unit

1.521,01  
+31,93

surcharge mirror  
grey tinted

1.884,03  
+252,10  
+378,15  
+84,03

**control**

**features**

»color tune«, switch- and continuously dimmable via  
»touchless control« (can be deactivated) and Occhio air (optional)

**Mito set box**

features adjustable via »touchless control«  
(no external dimming). Alternative: color temperature  
2700 K/3000 K/3500 K/4000 K adjustable in steps,  
dimmable via trailing-edge phase cut dimmer  
(not for »x-tra warm«)

**Mito »air« box**

Bluetooth control system integrated into the power  
supply canopy, features via Occhio air app.

+82,35

**options**

**light source**

high color LED CRI95

**2700 K–4000 K**  
with set or »air« box

Ⓢ **2200 K–3500 K »x-tra warm«**  
only with »air« box  
ø 40 +252,10  
ø 60 +336,13

**lighting effects**

**mirror**



**surfaces**

**head colors**

matt white  
matt black  
matt silver  
matt gold

**materials/phantom/black phantom**

rose gold  
bronze  
phantom  
black phantom

**cable (sfera corda)**

matt white  
matt black  
matt chrome  
matt gold

dark grey

The surfaces rose gold, bronze, phantom and black phantom may differ slightly from other product lines.

**further options**

- accessories for Occhio air from page 226

These and further options can be configured at  
**Occhio Digital Order System (DOS)**

**further information**


- technical data, information on control and mounting options view pages 22–31

# Mito sospeso mounting options

**sospeso flat**  
for hollow ceiling mounting with flat cover, remote power supply

- ☉ synchronization of multiple luminaires via »air« sync possible (prerequisite all luminaires with »air« and same type)


☉ integrated set box (standard), »air« box optional or DALI box

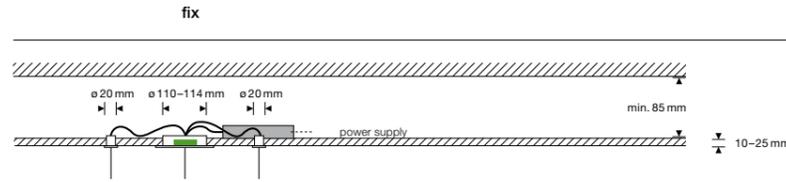

**sospeso move up**  
for surface mounting with integrated power supply, through-wiring possible

- ☉ synchronization of multiple luminaires via »air« sync possible (prerequisite all luminaires with »air« and same type)


☉ »air« integrated

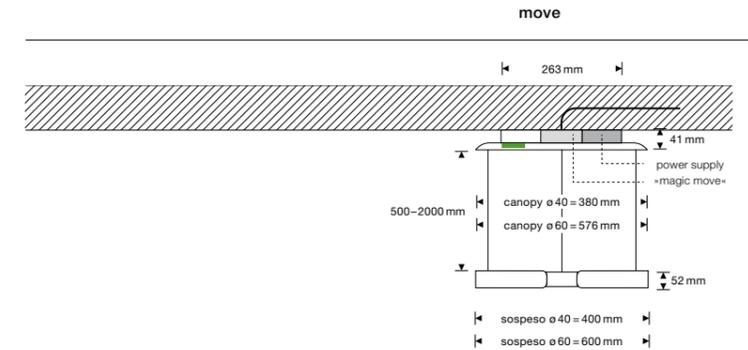

**sospeso up**  
for surface mounting with integrated power supply, through-wiring possible

- ☉ synchronization of multiple luminaires via »air« sync possible (prerequisite all luminaires with »air« and same type)


☉ integrated set box (standard), »air« box optional or DALI box

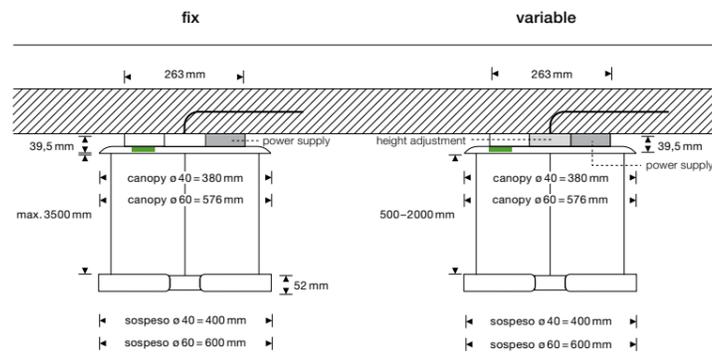

**sospeso move pure**  
with plastering element for flush ceiling-mounted installation, integrated power supply, through-wiring possible

- ☉ synchronization of multiple luminaires via »air« sync possible (prerequisite all luminaires with »air« and same type)


☉ »air« integrated

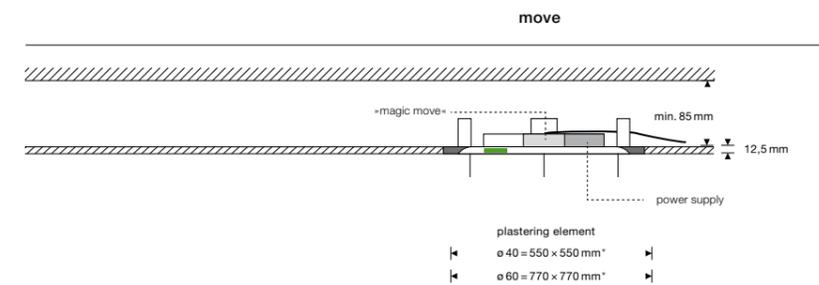

**sospeso pure**  
with plastering element for flush ceiling-mounted installation, integrated power supply, through-wiring possible

- ☉ synchronization of multiple luminaires via »air« sync possible (prerequisite all luminaires with »air« and same type)

☉ integrated set box (standard), »air« box optional or DALI box

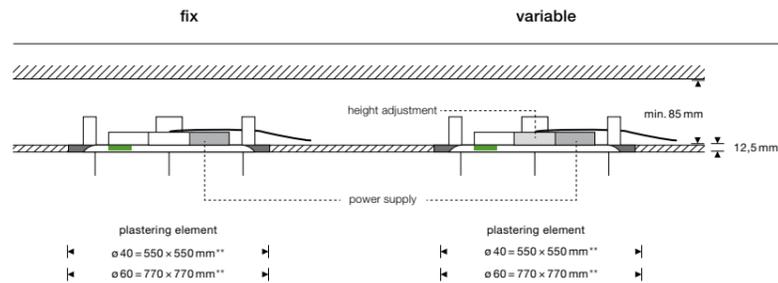


**sospeso due**  
connecting element »Mito connexion« with integrated power supply for surface-mounting

connexion due ø 40:  
L 663,5 mm x W 114,5 mm x H 19,5 mm

connexion due ø 60:  
L 963,5 mm x W 114,5 mm x H 19,5 mm

- ☉ the luminaire heads are synched via an internal control line

☉ integrated set box (standard), »air« box optional or DALI box

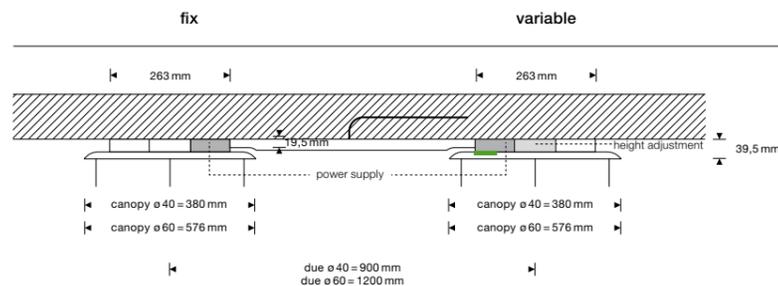


# Mito cosmo mounting options

**cosmo move**  
with plastering element for flush ceiling-mounted installation, external power supply (incl.)

Ⓢ synchronization of multiple luminaires via »air« sync possible (prerequisite all luminaires with »air« and same type)



»air« integrated

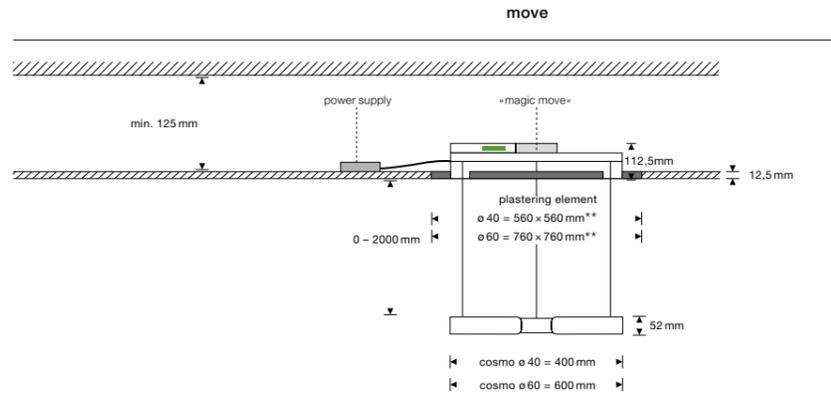


**cosmo piano**  
with plastering element for flush ceiling-mounted installation, external power supply (incl.)

Ⓢ synchronization of multiple luminaires via »air« sync possible (prerequisite all luminaires with »air« and same type)



»air« integrated

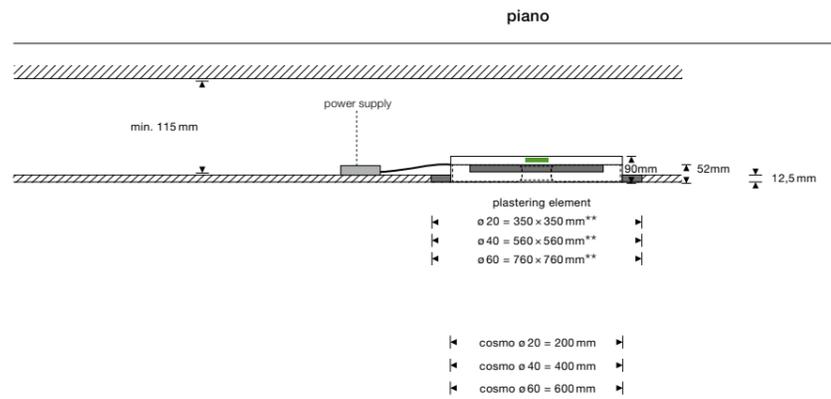


## Mito aura mounting options

**aura**  
for surface mounting with integrated power supply,  
also suitable for wall mounting,  
through-wiring possible

Ⓢ synchronization of multiple luminaires via  
»air« sync possible (prerequisite all luminaires  
with »air« and same type)


Ⓢ integrated set box (standard),  
»air« box optional or DALI box

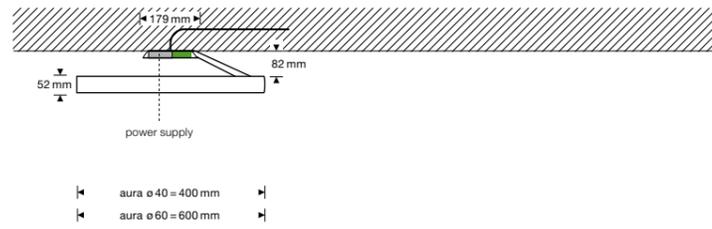

## Mito soffitto mounting options


**soffitto flat**  
for hollow ceiling mounting,  
also suitable for wall mounting,  
remote power supply (optional)

Ⓢ integrated set box (standard),  
»air« box optional or DALI box

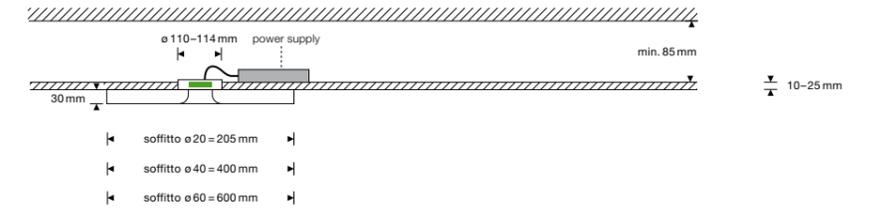

**soffitto up**  
for surface mounting with integrated power supply,  
also suitable for wall mounting,  
through-wiring possible

Ⓢ integrated set box (standard),  
»air« box optional or DALI box  
(DALI only ø 40 and ø 60)

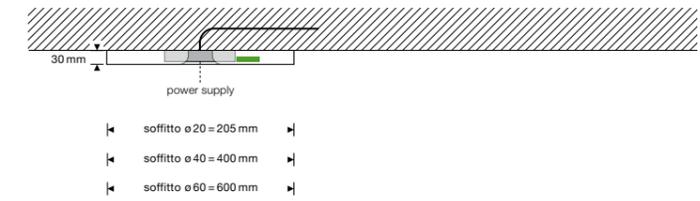


# Mito sfera mounting options

**sfera**  
for surface mounting with integrated power supply,  
through-wiring possible

☉ synchronization of multiple luminaires via  
»air« sync possible (prerequisite all luminaires  
with »air« and same type)

 integrated set box (standard),  
»air« box optional

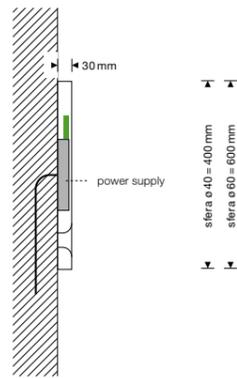


**sfera su**  
for mounting on a mirror  
incl. external power supply


☉ synchronization of multiple luminaires via  
»air« sync possible (prerequisite all luminaires  
with »air« and same type)

 integrated set box (standard),  
»air« box optional

**power supply behind mirror**

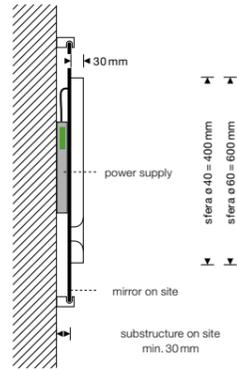


**power supply in recess**

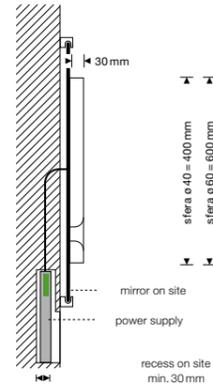

**sfera corda**  
for surface mounting with integrated power supply,  
incl. power cable for socket

☉ synchronization of multiple luminaires via  
»air« sync possible (prerequisite all luminaires  
with »air« and same type)

 integrated set box (standard),  
»air« box optional

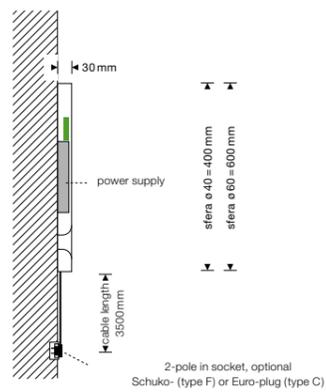


|                         |            |   |  |                                      |
|-------------------------|------------|---|--|--------------------------------------|
| version »color tune«    | connection | U | 230 V AC   |                                      |
|                         |            | W | sospeso 40 -40 W<br>sospeso 60 -60 W<br>cosmo move 40 -40 W<br>cosmo move 60 -60 W<br>cosmo piano 20 -20 W<br>cosmo piano 40 -40 W<br>cosmo piano 60 -60 W<br>soffitto 20 -20 W<br>soffitto 40 -40 W<br>soffitto 60 -60 W<br>aura 40 -40 W<br>aura 60 -60 W<br>sfera 40 -20 W<br>sfera 60 -40 W<br>raggio -60 W<br>largo -60 W |                                      |
| average service life    | t          |   | > 50.000 h   |                                      |
| energy-efficiency class | EEK        |   | G  |                                      |
| protection class        |            |   | IP 20  | IP 44 (Mito sfera and Mito sfera su) |

|                       |     |            |                        |            |             |
|-----------------------|-----|------------|------------------------|------------|-------------|
| LED color temperature | T   | high color | 2700–4000 K            | x-tra warm | 2200–3500 K |
|                       | CRI |            | Ra 95                  |            | Ra 95       |
| recommended use       |     |            | residential and public |            | residential |

|                                   | power | luminous flux luminaire | high color |         |         |
|-----------------------------------|-------|-------------------------|------------|---------|---------|
|                                   |       |                         | 20 W       | 40 W    | 60 W    |
| <b>sospeso/cosmo move</b>         |       |                         |            |         |         |
| lighting effect table (wide)      |       |                         | 2220 lm    |         | 3330 lm |
| lighting effect room (narrow)     |       |                         | 2140 lm    |         | 3210 lm |
| <b>cosmo piano</b>                |       |                         |            |         |         |
| lighting effect table (wide)      |       |                         | 850 lm     | 1700 lm | 2400 lm |
| lighting effect room (narrow)     |       |                         | 720 lm     | 1440 lm | 2060 lm |
| <b>soffitto</b>                   |       |                         |            |         |         |
| lighting effect wall (wide)       |       |                         | 850 lm     | 1700 lm | 2400 lm |
| lighting effect ceiling (narrow)  |       |                         | 720 lm     | 1440 lm | 2060 lm |
| <b>aura</b>                       |       |                         |            |         |         |
| lighting effect (wide)            |       |                         |            | 2310 lm | 3460 lm |
| lighting effect (narrow)          |       |                         |            | 2140 lm | 3210 lm |
| <b>sfera/sfera su/sfera corda</b> |       |                         |            |         |         |
| lighting effect wide-diffuse      |       |                         | 800 lm     | 1600 lm |         |
| <b>raggio/largo</b>               |       |                         |            |         |         |
| lighting effect flood/wide        |       |                         |            |         | 3330 lm |

version (»color tune«)

Mito luminaires can be dimmed via »touchless control« (sospeso, sfera, raggio, largo), »body sensor« (raggio) and Occhio air (standard for raggio, largo, sospeso move, cosmo; optional for sospeso, soffitto, sfera). Alternatively dimming via trailing-edge phase cut\* or DALI is possible (not raggio, largo, sospeso move, cosmo).

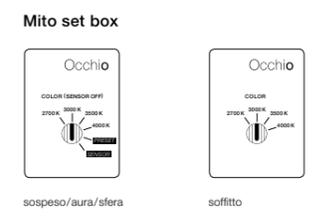


**sospeso\*/aura/sfera**  
COLOR (sensor off)  
adjustable color temperature (4 steps),  
trailing-edge phase cut dimming possible

PRESET (sospeso/aura)  
adjustable color temperature (4 steps),  
adjustable up/downlight ratio (5 steps)

PRESET (sfera)  
adjustable color temperature (4 steps),  
adjustable light intensity (5 steps)

**SENSOR**  
»touchless control« (gesture control),  
switching, dimming, »up/down fading«\*\*,  
»color tune« (color temperature continuously adjustable),  
no external dimming possible

**soffitto**  
COLOR  
adjustable color temperature (4 steps),  
trailing-edge phase cut dimming possible

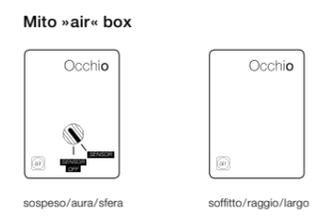

**Occhio air**  
Bluetooth control via Occhio air app or »air« controller (optional),  
control of individual luminaires, groups and scenes.

**sospeso\*/aura/sfera**  
SENSOR  
»air« + »touchless control« (Bluetooth and gesture control), control via »touchless control« and Occhio air app or »air« controller, switching, dimming, »up/down fading«\*\*, »color tune« (color temperature continuously adjustable)


SENSOR OFF  
»air« (Bluetooth control), control via Occhio air app or »air« controller switching, dimming, »up/down fading«\*\*, »color tune« (color temperature continuously adjustable)

**raggio/largo**  
Bluetooth control integrated in power supply, »air« + »touchless control« (Bluetooth and gesture control) and »body sensor« (only raggio), control via »touchless control«, »body sensor« (nur raggio) and Occhio air app or »air« controller, switching, dimming, »up/down fading«, »color tune« (color temperature continuously adjustable), control and sensors can be deactivated via Occhio air App

**soffitto**  
»air« (Bluetooth control), control via Occhio air app or »air« controller, switching, dimming, »color tune« (color temperature continuously adjustable)

**sospeso move/cosmo**  
Bluetooth control integrated, »air« + »touchless control« (Bluetooth and gesture control), control via »touchless control« and Occhio air app or »air« controller, switching, dimming, »up/down fading«, »color tune« (color temperature continuously adjustable), »magic move« (electrical height adjustment), control and sensors can be deactivated via Occhio air app

No external dimming possible with Mito »air« box

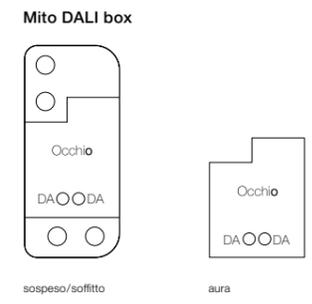

**control via DALI**

**sospeso\*/aura**  
adjustable color temperature\*\*\*,  
continuously dimmable,  
uplight and downlight separately controllable (two DALI addresses required),  
no »touchless control«, no »up/down fading«


**soffitto** (DALI not for Mito soffitto 20 up)  
adjustable color temperature\*\*\*,  
continuously dimmable

\*not Mito sospeso move  
\*\*not Mito sfera  
\*\*\*A DALI controller »DALI device type 8 (DT8)« is required to control the light color.  
Further information can be found at [occhio.com/dali](http://occhio.com/dali)

X series

# Edizione Lusso

Precious marble, finest ascot leather, fascinating new surface finishes: Edizione Lusso focuses on extraordinary materials. The exclusive edition includes luminaires from the Mito series and gives them a new and incomparable appearance with exquisite accents.

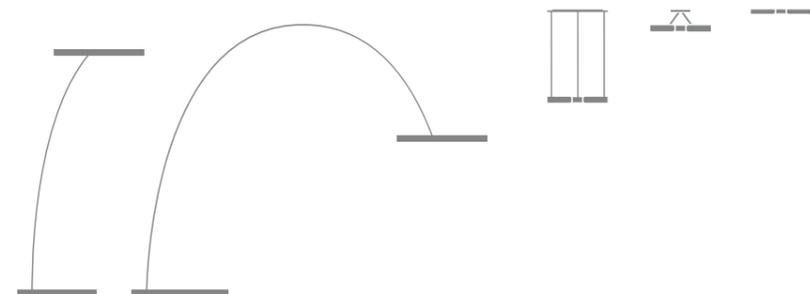

# Mito raggio lusso



scuro

7.176,47



caldo

7.176,47



vivo

7.176,47

height 205 cm  
ø head 60 cm, 60 W (3330 lm)

## surfaces

- head**  
black phantom
- body (Ascot leather)**  
nero
- base (marble)**  
nero marquina

- head**  
phantom
- body (Ascot leather)**  
marrone
- base (marble)**  
marrone emperador

- head**  
phantom
- body (Ascot leather)**  
grigio
- base (marble)**  
verde guatemala

## control

**features**  
»color tune«, »up/down fading«, switch- and dimmable  
via »touchless control«, »body sensor« (only raggio),  
and Occhio air (included)

**Occhio air**   
Bluetooth control integrated in power supply.  
Features via Occhio air app or »air« controller  
(optional) controllable, no external dimming

## options

**light source**  
high color LED CRI95  
**2700 K–4000 K**  **2200 K–3500 K »x-tra warm«**   
+ 504,20

## lighting effects

 flood  
 wide

## further options

These and further options can be configured at  
**Occhio Digital Order System (DOS)**

## further information

- technical data, information on control  
and on mounting options view pages 22–31

# Mito largo lusso



scuro

9.243,70



caldo

9.243,70



vivo

9.243,70

height head 130 cm, 145 cm, 160 cm (adjustable)  
resulting total height approx. 210–240 cm, ø head 60 cm, 60W (3330 lm)

**surfaces**

**head**

black phantom



**body (Ascot leather)**

nero



**base (marble)**

nero marquina



**head**

phantom



**body (Ascot leather)**

marrone



**base (marble)**

marrone emperador



**head**

phantom



**body (Ascot leather)**

grigio



**base (marble)**

verde guatemala



**control**

**features**

»color tune«, »up/down fading«, switch- and dimmable  
via »touchless control«, »body sensor« (only raggio),  
and Occhio air (included)

**Occhio air**



Bluetooth control integrated in power supply.  
Features via Occhio air app or »air« controller  
(optional) controllable, no external dimming

**options**

**light source**

high color LED CRI95

2700 K–4000 K

⊕ 2200 K–3500 K »x-tra warm«  
+ 504,20

**lighting effects**



**further options**

These and further options can be configured at  
**Occhio Digital Order System (DOS)**

**further information**

- technical data, information on control  
and on mounting options view pages 22–31

# Mito sospeso 40 lusso



scuro

caldo

vivo

intenso

oro

puro

3.260,50

3.260,50

3.260,50

3.134,45

2.882,35

2.882,35

⦿ special lengths up to 500 cm possible (surcharge per head +319,33, discountable)

continuous height adjustment 50–200 cm, for surface-mounted installation  
ø 40 cm, 40 W (2220 lm) through-wiring possible

| surfaces                     | scuro   | caldo   | vivo  | intenso   | oro   | puro   |
|------------------------------|---|---|---|---|---|--|
| <b>head</b>                  | black phantom  | phantom  | phantom  | rose gold  | matt gold  | matt white  |
| <b>cover (Ascot leather)</b> | nero           | marrone  | grigio   | grigio     | bianco     | bianco      |

| control             | scuro, caldo, vivo  | intenso, oro, puro   |
|---------------------|---|--|
| <b>features</b>     | »color tune«, »up/down fading«, switch- and continuously dimmable via »touchless control« (can be deactivated) and Occhio air (optional)  | <b>Mito »air« box</b> <br>Bluetooth control integrated in cover/canopy. Features via Occhio air app or »air« controller (optional) controllable (no external dimming)<br>+82,35 |
| <b>Mito set box</b> | features adjustable via »touchless control« (no external dimming). Alternative: color temperature 2700 K/3000 K/3500 K/4000 K and »up/down fading« adjustable, dimmable via trailing-edge phase cut dimmer (not for »x-tra warm«) | <b>Mito DALI box</b><br>version for building control system via DALI (no »touchless control«)<br>+82,35  |

| options | light source   | lighting effects  |
|---------|--|---|
|         | high color LED CRI 95<br><b>2700 K–4000 K</b> with set, »air« or DALI box<br><b>⦿ 2200 K–3500 K »x-tra warm«</b> only with »air« or DALI box +336,13 | <b>room</b><br>diffuse <br>narrow <br><b>table</b><br>flood <br>wide  |

**further options** These and further options can be configured at **Occhio Digital Order System (DOS)**

**further information** - technical data, information on control and on mounting options view pages 22–31

# Mito sospeso 60 lusso



scuro

caldo

vivo

intenso

oro

puro

4.369,75

4.369,75

4.369,75

4.176,47

3.789,92

3.789,92

⊙ special lengths up to 500 cm possible (surcharge per head +319,33, discountable)

continuous height adjustment 50–200 cm, for surface-mounted installation  
 ø60 cm, 60 W (3330 lm) through-wiring possible

| surfaces | head  | cover (Ascot leather) | head   | cover (Ascot leather) | head    | cover (Ascot leather)  | head      | cover (Ascot leather)   | head      | cover (Ascot leather) |            |        |
|----------|---|-----------------------|--|-----------------------|---------|--|-----------|---|-----------|-----------------------|------------|--------|
|          | black phantom   | nero                  | phantom  | marrone               | phantom | grigio   | rose gold | grigio  | matt gold | bianco                | matt white | bianco |
| control  | <b>features</b><br>»color tune«, »up/down fading«, switch- and continuously dimmable via »touchless control« (can be deactivated) and Occhio air (optional)   |                       | <b>Mito set box</b><br>features adjustable via »touchless control« (no external dimming). Alternative: color temperature 2700 K/3000 K/3500 K/4000 K and »up/down fading« adjustable, dimmable via trailing-edge phase cut dimmer (not for »x-tra warm«) |                       |         | <b>Mito »air« box</b> <br>Bluetooth control integrated in cover/canopy. Features via Occhio air app or »air« controller (optional) controllable (no external dimming)<br>+82,35 |           | <b>Mito DALI box</b><br>version for building control system via DALI (no »touchless control«)<br>+82,35 |           |                       |            |        |
| options  | <b>light source</b><br>high color LED CRI 95<br>2700 K–4000 K with set, »air« or DALI box<br>⊙ 2200 K–3500 K »x-tra warm« only with »air« or DALI box +504,20 |                       |  |                       |         | <b>lighting effects</b><br>room: narrow, diffuse<br>table: wide, flood   |           |   |           |                       |            |        |

**further options** These and further options can be configured at Occhio Digital Order System (DOS)

**further information** - technical data, information on control and on mounting options view pages 22–31

# Mito aura 40 lusso



scuro

caldo

vivo

intenso

oro

puro

2.436,97

2.436,97

2.436,97

2.310,92

2.058,82

2.058,82

for surface-mounted installation, incl. power supply  
ø 40 cm, 40 W (2310 lm), H 13,5 cm

| surfaces                     | scuro         | caldo      | vivo       | intenso    | oro        | puro       |
|------------------------------|---------------|------------|------------|------------|------------|------------|
| <b>head</b>                  | black phantom | phantom    | phantom    | rose gold  | matt gold  | matt white |
| <b>body</b>                  | matt black    | matt black | matt black | matt black | matt white | matt white |
| <b>cover (Ascot leather)</b> | nero          | marrone    | grigio     | grigio     | bianco     | bianco     |




| control         | scuro  | caldo | vivo | intenso   | oro | puro |
|-----------------|--|-------|------|---|-----|------|
| <b>features</b> | »color tune«, »up/down fading«, switch- and continuously dimmable via »touchless control« (can be deactivated) and Occhio air (optional) |       |      | <b>Mito »air« box</b>   |     |      |
|                 |  |       |      | Bluetooth control integrated in cover/canopy. Features via Occhio air app or »air« controller (optional) controllable (no external dimming)<br>+82,35 |     |      |
|                 |  |       |      | <b>Mito DALI box</b><br>version for building control system via DALI (no »touchless control«)<br>+82,35   |     |      |

| options                 | scuro  | caldo | vivo | intenso  | oro                    | puro                |
|-------------------------|--|-------|------|--|------------------------|---------------------|
| <b>light source</b>     | high color LED CRI 95<br>2700 K–4000 K with set, »air« or DALI box |       |      | © 2200 K–3500 K »x-tra warm« only with »air« or DALI box +336,13 |                        |                     |
| <b>lighting effects</b> |  |       |      | <b>ceiling</b><br>narrow   | <b>ceiling</b><br>wide | <b>wall</b><br>wide |

**further options** These and further options can be configured at **Occhio Digital Order System (DOS)**

**further information** - technical data, information on control and on mounting options view pages 22–31

# Mito aura 60 lusso

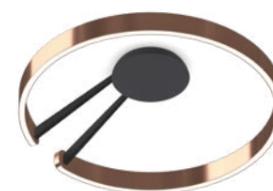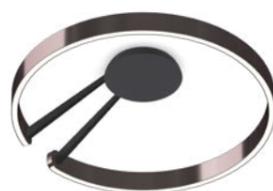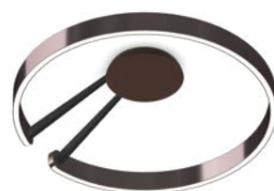

scuro

caldo

vivo

intenso

oro

puro

3.294,12

3.294,12

3.294,12

3.100,84

2.714,29

2.714,29

for surface-mounted installation, incl. power supply  
ø 40 cm, 40 W (3460 lm), H 13,5 cm

| surfaces                     | scuro   | caldo  | vivo   | intenso  | oro  | puro   |
|------------------------------|---|--|--|--|--|--|
| <b>head</b>                  | black phantom  | phantom     | phantom     | rose gold   | matt gold   | matt white  |
| <b>body</b>                  | matt black     | matt black  | matt black  | matt black  | matt white  | matt white  |
| <b>cover (Ascot leather)</b> | nero           | marrone     | grigio      | grigio      | bianco      | bianco      |

| control         | scuro  | caldo | vivo  | intenso   | oro   | puro |
|-----------------|--|-------|---|---|---|------|
| <b>features</b> | »color tune«, »up/down fading«, switch- and continuously dimmable via »touchless control« (can be deactivated) and Occhio air (optional) |       | <b>Mito set box</b>   | <b>Mito »air« box</b>                                  | <b>Mito DALI box</b>  |      |
|                 |  |       | features adjustable via »touchless control« (no external dimming). Alternative: color temperature 2700 K/3000 K/3500 K/4000 K and »up/down fading« adjustable, dimmable via trailing-edge phase cut dimmer (not for »x-tra warm«) | Bluetooth control integrated in cover/canopy. Features via Occhio air app or »air« controller (optional) controllable (no external dimming) | version for building control system via DALI (no »touchless control«) |      |
|                 |  |       |   | +82,35  | +82,35  |      |

| options             | scuro  | caldo | vivo | intenso   | oro   | puro   |
|---------------------|--|-------|------|---|---|--|
| <b>light source</b> | high color LED CRI 95  |       |      | <b>lighting effects</b>   |   |  |
|                     | 2700 K–4000 K with set, »air« or DALI box                        |       |      | <b>ceiling</b> diffuse narrow  | <b>ceiling</b> diffuse wide  | <b>wall</b> diffuse wide  |
|                     | © 2200 K–3500 K »x-tra warm« only with »air« or DALI box +504,20 |       |      |   |   |  |

**further options** These and further options can be configured at Occhio Digital Order System (DOS)

**further information** - technical data, information on control and on mounting options view pages 22–31

# Mito soffitto 20 lusso



scuro

caldo

vivo

intenso

oro

puro

1.159,66

1.159,66

1.159,66

1.109,24

1.008,40

1.008,40

for surface-mounted installation, ø20 cm, 20W (850lm)  
through-wiring possible

**surfaces**

**head**  
black phantom



**head**  
phantom



**head**  
phantom



**head**  
rose gold



**head**  
matt gold



**head**  
matt white



**cover (Ascot leather)**  
nero



**cover (Ascot leather)**  
marrone



**cover (Ascot leather)**  
grigio



**cover (Ascot leather)**  
grigio



**cover (Ascot leather)**  
bianco



**cover (Ascot leather)**  
bianco



**control**

**features**

»color tune«, switch- and continuously dimmable  
via Occhio air (optional)

**Mito set box**

color temperature 2700 K/3000 K/3500 K/4000 K  
adjustable, dimmable via trailing-edge phase  
cut dimmer (not for »x-tra warm«)

**Mito »air« box**



Bluetooth control integrated in cover/canopy.  
Features via Occhio air app or »air« controller  
(optional) controllable (no external dimming)

+82,35

**Mito DALI box**

version for building control system via DALI

+82,35

**options**

**light source**

high color LED CRI95

**2700 K–4000 K**  
with set, »air« or  
DALI box

Ⓞ **2200 K–3500 K »x-tra warm«**  
only with »air« or DALI box  
+ 168,07

**lighting effects**

**ceiling** narrow



**ceiling** wide



**wall to wall** wide



**further options**

These and further options can be configured at  
**Occhio Digital Order System (DOS)**

**further information**

- technical data, information on control  
and on mounting options view pages 22–31

# Mito soffitto 40 lusso



scuro

caldo

vivo

intenso

oro

puro

1.731,09

1.731,09

1.731,09

1.655,46

1.504,20

1.504,20

for surface-mounted installation, ø 40 cm, 40 W (1700 lm)  
through-wiring possible

**surfaces**

**head**  
black phantom



**head**  
phantom



**head**  
phantom



**head**  
rose gold



**head**  
matt gold



**head**  
matt white



**cover (Ascot leather)**  
nero



**cover (Ascot leather)**  
marrone



**cover (Ascot leather)**  
grigio



**cover (Ascot leather)**  
grigio



**cover (Ascot leather)**  
bianco



**cover (Ascot leather)**  
bianco



**control**

**features**

»color tune«, switch- and continuously dimmable  
via Occhio air (optional)

**Mito set box**

color temperature 2700 K/3000 K/3500 K/4000 K  
adjustable, dimmable via trailing-edge phase  
cut dimmer (not for »x-tra warm«)

**Mito »air« box**



Bluetooth control integrated in cover/canopy.  
Features via Occhio air app or »air« controller  
(optional) controllable (no external dimming)

+82,35

**Mito DALI box**

version for building control system via DALI

+82,35

**options**

**light source**

high color LED CRI 95

**2700 K–4000 K**  
with set, »air« or  
DALI box

© **2200 K–3500 K »x-tra warm«**  
only with »air« or DALI box  
+252,10

**lighting effects**

**ceiling** narrow



**ceiling** wide



**wall to wall** wide



**further options**

These and further options can be configured at  
**Occhio Digital Order System (DOS)**

**further information**

- technical data, information on control  
and on mounting options view pages 22–31

# Mito soffitto 60 lusso



scuro

caldo

vivo

intenso

oro

puro

2.504,20

2.504,20

2.504,20

2.386,55

2.151,26

2.151,26

for surface-mounted installation, ø 60 cm, 60 W (2400 lm)  
through-wiring possible

**surfaces**

**head**  
black phantom



**head**  
phantom



**head**  
phantom



**head**  
rose gold



**head**  
matt gold



**head**  
matt white



**cover (Ascot leather)**  
nero



**cover (Ascot leather)**  
marrone



**cover (Ascot leather)**  
grigio



**cover (Ascot leather)**  
grigio



**cover (Ascot leather)**  
bianco



**cover (Ascot leather)**  
bianco



**control**

**features**

»color tune«, switch- and continuously dimmable  
via Occhio air (optional)

**Mito set box**

color temperature 2700 K/3000 K/3500 K/4000 K  
adjustable, dimmable via trailing-edge phase  
cut dimmer (not for »x-tra warm«)

**Mito »air« box**



Bluetooth control integrated in cover/canopy.  
Features via Occhio air app or »air« controller  
(optional) controllable (no external dimming)

+82,35

**Mito DALI box**

version for building control system via DALI

+82,35

**options**

**light source**

high color LED CRI 95

**2700 K–4000 K**  
with set, »air« or  
DALI box

Ⓞ **2200 K–3500 K »x-tra warm«**  
only with »air« or DALI box  
+336,13

**lighting effects**

**ceiling** narrow



**ceiling** wide



**wall to wall** wide



**further options**

These and further options can be configured at  
**Occhio Digital Order System (DOS)**


**further information**

- technical data, information on control  
and on mounting options view pages 22–31


X series

# Mito linear

The new shape of light. Mito linear is the logical extension of the iconic Mito series. It transfers the design claim and the extraordinary lighting quality of Mito in brand new application areas in the residential and contract sector. With its comprehensive concept and innovative features Mito linear enables a new dimension of holistic lighting design.



**Mito linear**  
floor- and table luminaires



**terra 190**

head length 115 cm  
height 190 cm

head fix




☺ can be synced via Occhio air

**terra 220**

head length 115 cm  
height 220 cm

head fix




☺ can be synced via Occhio air

**terra var**

head length 115 cm  
height adjustable 190–220 cm

head fix




☺ can be synced via Occhio air

**table top**

head length 115 cm  
height 145 cm, 220 cm at 75 cm  
standard table height

head fix



☺ can be synced via Occhio air

|                      |                                   |          |                 |                 |                 |
|----------------------|-----------------------------------|----------|-----------------|-----------------|-----------------|
| <b>70W</b> (4600 lm) | <b>colors</b>                     | 2.504,20 | <b>2.603,36</b> | <b>2.878,99</b> | <b>2.411,76</b> |
| <b>56W</b> (3600 lm) | <b>materials</b>                  | +235,29  |                 | +235,29         |                 |
| <b>56W</b> (3600 lm) | <b>phantom/<br/>black phantom</b> | +352,94  |                 | +352,94         |                 |

|                |   |  |
|----------------|---|--|
| <b>control</b> | <b>features</b>   | <b>Occhio air</b>  |
|                | switch- and dimmable via »touchless control« and »body sensor«, presence recognition via »presence sensor«, adaptation to ambient light via »ambient light control«, additionally controllable via Occhio air (inclusive) | Bluetooth control integrated in power supply, features via Occhio air app or »air« controller (optional) controllable, no external dimming |

|                |  |  |                 |                              |  |
|----------------|--|--|-----------------|------------------------------|--|
| <b>options</b> | <b>light source</b>                          | <b>lighting effects</b>                    | <b>surfaces</b> | <b>head/body/base colors</b> | <b>materials/phantom/black phantom</b> |
|                | high color LED CRI95<br><b>2700 K–4000 K</b> | flood<br>wide<br>asymmetric light emission |                 |                              |  |

The surfaces rose gold, bronze, phantom and black phantom may differ slightly from other product lines.

|                        |  |   |                            |  |
|------------------------|--|---|----------------------------|--|
| <b>further options</b> | - accessories for Occhio air from page 226 | These and further options can be configured at <b>Occhio Digital Order System (DOS)</b> | <b>further information</b> | - technical data and information on control view pages 80–81 |
|------------------------|--|---|----------------------------|--|


**Mito linear**  
floor luminaires



**terra 3d**

head length 115 cm  
height 190 cm  
head swivelable by 60°

☺ can be synced via Occhio air



|                       |                                   |          |
|-----------------------|-----------------------------------|----------|
| <b>70 W</b> (4600 lm) | <b>colors</b>                     | 2.924,37 |
| <b>56 W</b> (3600 lm) | <b>materials</b>                  | +235,29  |
| <b>56 W</b> (3600 lm) | <b>phantom/<br/>black phantom</b> | +352,94  |

|                |   |
|----------------|---|
| <b>control</b> | <b>features</b>   |
|                | switch- and dimmable via »touchless control« and »body sensor«, presence recognition via »presence sensor«, adaptation to ambient light via »ambient light control«, additionally controllable via Occhio air (inclusive) |

|  |
|--|
| <b>Occhio air</b>                                     |
| Bluetooth control integrated in power supply, features via Occhio air app or »air« controller (optional) controllable, no external dimming |

|                |  |
|----------------|--|
| <b>options</b> | <b>light source</b>                          |
|                | high color LED CRI95<br><b>2700 K-4000 K</b> |

|  |
|--|
| <b>lighting effects</b>  |
|  flood<br> wide<br> symmetric light emission |

**surfaces**

**head/body/base colors**

|             |   |
|-------------|---|
| matt white  |  |
| matt black  |  |
| matt silver |  |

|                        |   |
|------------------------|---|
| matt black/matt silver |  |
| gold matt/matt white   |  |
| gold matt/matt black   |  |

**materials/phantom/black phantom**

|                          |   |
|--------------------------|---|
| rose gold/matt black     |  |
| bronze/matt black        |  |
| phantom/matt black       |  |
| black phantom/matt black |  |

The surfaces rose gold, bronze, phantom and black phantom may differ slightly from other product lines.

**further options** - accessories for Occhio air from page 226

These and further options can be configured at **Occhio Digital Order System (DOS)**

**further information** - technical data and information on control view pages 80-81

**Mito linear**  
suspended luminaires  
volo 100



fix flat

fix up

fix up midfeed

**fix**  
pendant length adjustable  
during mounting, max. 350 cm

**fix**  
for hollow ceiling  
length 103 cm, 45 W (2900 lm)  
incl. remote converter

**fix**  
for surface-mounted installation  
length 103 cm, 45 W (2900 lm)  
through-wiring possible  
incl. converter

**fix**  
for surface-mounted installation/midfeed  
length 103 cm, 45 W (2900 lm)  
through-wiring possible  
incl. converter

Ⓢ can be synced via Occhio air

Ⓢ can be synced via Occhio air

Ⓢ can be synced via Occhio air

**colors** 1.453,78  
**materials** +201,68  
**phantom/black phantom** +302,52

1.598,32

1.678,99  
+201,68  
+302,52

**control**

**features**  
»color tune«, »up/down fading«, switch- and continuously dimmable  
via »touchless control« (can be deactivated) and Occhio air (optional)

**Mito set box**  
features adjustable via »touchless control«  
(no external dimming). Alternative: color temperature  
2700 K/3000 K/3500 K/4000 K and »up/down fading«  
adjustable, dimmable via trailing-edge phase  
cut dimmer (not for »x-tra warm«)

**Mito »air« box**   
Bluetooth control integrated in luminaire. Features via  
Occhio air app or »air« controller (optional) controllable  
(no external dimming)

+ 82,35

**Mito DALI box**  
external control via DALI  
(no »touchless control«)

+ 82,35

**options**

**light source**  
high color LED CRI 95

**2700 K–4000 K**  
with set, »air« or  
DALI box

Ⓢ **2200 K–3500 K »x-tra warm«**  
only with »air« or DALI box  
+ 294,12

**lighting effects**

**room**  diffuse  flood  
 narrow  wide

**table**

**surfaces**

**head colors**

matt white   
matt black   
matt silver   
matt gold 

**materials/phantom/black phantom**

rose gold   
bronze   
phantom   
black phantom 

**canopy**

matt white   
matt black\* 



\*canopy in matt black (surcharge + 134,45; flat Version + 67,23) Ⓢ  
The surfaces rose gold, bronze, phantom and black phantom may differ slightly from other product lines.

**further options** - accessories for Occhio air from page 226

These and further options can be configured at  
**Occhio Digital Order System (DOS)**

**further information** - technical data, information on control  
and on mounting options view pages 74–81

**Mito linear**  
suspended luminaires  
volo 100

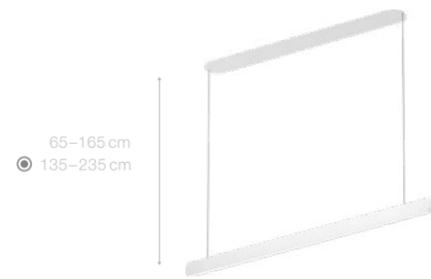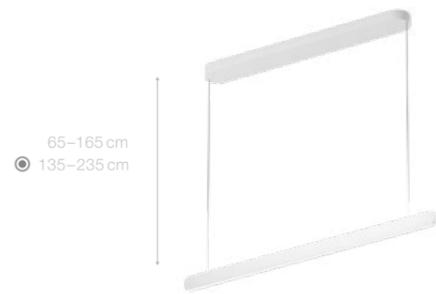

var up

var pure

fix track

|  |  |   |  |  |  |
|--|--|---|--|--|--|
| <p><b>variable</b><br/>continuous height adjustment<br/>65–165 cm    135–235 cm</p> <p><b>fix</b><br/>pendant length adjustable<br/>during mounting, max. 350 cm</p> | <p><b>variable</b><br/>for surface-mounted installation<br/>length 103 cm, 45 W (2900 lm)<br/>through-wiring possible<br/>incl. converter</p> <p>☉ can be synced via Occhio air</p>                            | <p><b>variable</b><br/>flush ceiling-mounted installation in hollow ceiling,<br/>incl. mounting board, power supply integrated in luminaire<br/>length 103 cm, 45 W (2900 lm)<br/>incl. converter</p> <p>☉ can be synced via Occhio air</p>   | <p><b>fix</b><br/>with in-trac adapter, for Eutrac, Erco and Zumtobel 3-phase tracks<br/>length 103 cm, 45 W (2900 lm)<br/>incl. remote converter</p> <p>☉ can be synced via Occhio air</p>          |  |  |
| <p><b>colors</b></p> <p><b>materials</b></p> <p><b>phantom/black phantom</b></p>   | <p><b>65–165 cm</b>    135–235 cm</p> <p>2.084,81    2.218,49</p> <p>+201,68</p> <p>+302,52</p> <p>☉ special lengths up to 500 cm possible (surcharge per head +319,33, discountable)</p>                      | <p><b>65–165 cm</b>    135–235 cm</p> <p>2.499,16    2.633,61</p>   | <p>1.700,84</p> <p>+201,68</p> <p>+302,52</p>  |  |  |
| <p><b>control</b></p>  | <p><b>features</b></p> <p>»color tune«, »up/down fading«, switch- and continuously dimmable<br/>via »touchless control« (can be deactivated) and Occhio air (optional)</p>                                     | <p><b>Mito set box</b></p> <p>features adjustable via »touchless control«<br/>(no external dimming). Alternative: color temperature<br/>2700 K/3000 K/3500 K/4000 K and »up/down fading«<br/>adjustable, dimmable via trailing-edge phase<br/>cut dimmer (not for »x-tra warm«)</p> | <p><b>Mito »air« box</b> </p> <p>Bluetooth control integrated in luminaire. Features via<br/>Occhio air app or »air« controller (optional) controllable<br/>(no external dimming)</p> <p>+ 82,35</p> | <p><b>Mito DALI box</b></p> <p>external control via DALI<br/>(no »touchless control«)<br/>version track: only for OneTrack by Eutrac/Stucchi track</p> <p>+ 82,35</p>  |  |
| <p><b>options</b></p>  | <p><b>light source</b></p> <p>high color LED CRI95</p> <p><b>2700 K–4000 K</b><br/>with set, »air« or<br/>DALI box</p> <p>☉ <b>2200 K–3500 K »x-tra warm«</b><br/>only with »air« or DALI box<br/>+ 294,12</p> | <p><b>lighting effects</b></p> <p><b>room</b>    <b>table</b></p> <p> diffuse     flood<br/> narrow     wide</p>  | <p><b>surfaces</b></p>   | <p><b>head colors</b></p> <p>matt white <br/>matt black <br/>matt silver <br/>matt gold </p> <p><b>materials/phantom/black phantom</b></p> <p>rose gold <br/>bronze <br/>phantom <br/>black phantom </p> <p>*canopy in matt black (surcharge + 134,45) ☉<br/>The surfaces rose gold, bronze, phantom and black phantom may differ slightly from other product lines.</p> | <p><b>canopy</b></p> <p>matt white <br/>matt black* </p> |
| <p><b>further options</b></p>  | <p>- accessories for Occhio air from page 226</p>  | <p>These and further options can be configured at<br/><b>Occhio Digital Order System (DOS)</b></p>  | <p><b>further information</b></p>  | <p>- technical data, information on control<br/>and on mounting options view pages 74–81</p>   |  |

**Mito linear**  
suspended luminaires  
volo 140



fix flat



fix up



fix up midfeed

**fix**  
pendant length adjustable  
during mounting, max. 350 cm

**fix**  
for hollow ceiling  
length 136 cm, 60 W (3900 lm)  
incl. remote converter

Ⓢ can be synced via Occhio air

**colors**  
**materials**  
**phantom/black phantom**

1.784,87  
+268,91  
+403,36

**fix**  
for surface-mounted installation  
length 136 cm, 60 W (3900 lm)  
through-wiring possible  
incl. converter

Ⓢ can be synced via Occhio air

1.929,41

**fix**  
for surface-mounted installation/midfeed  
length 136 cm, 60 W (3900 lm)  
through-wiring possible  
incl. converter

Ⓢ can be synced via Occhio air

2.052,10  
+268,91  
+403,36

**control**

**features**  
»color tune«, »up/down fading«, switch- and continuously dimmable  
via »touchless control« (can be deactivated) and Occhio air (optional)

**Mito set box**  
features adjustable via »touchless control«  
(no external dimming). Alternative: color temperature  
2700 K/3000 K/3500 K/4000 K and »up/down fading«  
adjustable, dimmable via trailing-edge phase  
cut dimmer (not for »x-tra warm«)

**Mito »air« box**   
Bluetooth control integrated in luminaire. Features via  
Occhio air app or »air« controller (optional) controllable  
(no external dimming)

+ 82,35

**Mito DALI box**  
external control via DALI  
(no »touchless control«)

+ 82,35

**options**

**light source**  
high color LED CRI 95  
**2700 K–4000 K**  
with set, »air« or  
DALI box  
**2200 K–3500 K »x-tra warm«**  
only with »air« or DALI box  
+ 420,17

**lighting effects**  
**room**  diffuse narrow  flood wide  
**table**  flood wide

**surfaces**

**head colors**  
matt white   
matt black   
matt silver   
matt gold   
**materials/phantom/black phantom**  
rose gold   
bronze   
phantom   
black phantom 

**canopy**  
matt white   
matt black\* 

\*canopy in matt black (surcharge + 201,68; flat Version + 67,23) Ⓢ  
The surfaces rose gold, bronze, phantom and black phantom may differ slightly from other product lines.

**further options**

- accessories for Occhio air from page 226

These and further options can be configured at  
**Occhio Digital Order System (DOS)**

**further information**

- technical data, information on control  
and on mounting options view pages 74–81

**Mito linear**  
suspended luminaires  
volo 140



Mito linear

var up

var pure

fix track

|   |  |  |   |   |  |
|---|--|--|---|---|--|
| <p><b>variable</b><br/>continuous height adjustment<br/>65-165 cm    <input checked="" type="radio"/> 135-235 cm</p> <p><b>fix</b><br/>pendant length adjustable<br/>during mounting, max. 350 cm</p> | <p><b>variable</b><br/>for surface-mounted installation<br/>length 136 cm, 60 W (3900 lm)<br/>through-wiring possible<br/>incl. converter</p> <p><input checked="" type="radio"/> can be synced via Occhio air</p>   | <p><b>variable</b><br/>flush ceiling-mounted installation in hollow ceiling,<br/>incl. mounting board, power supply integrated in luminaire<br/>length 136 cm, 60 W (3900 lm)<br/>incl. converter</p> <p><input checked="" type="radio"/> can be synced via Occhio air</p>   | <p><b>fix</b><br/>with in-trac adapter, for Eutrac, Erco and Zumtobel 3-phase tracks<br/>length 136 cm, 60 W (3900 lm)<br/>incl. remote converter</p> <p><input checked="" type="radio"/> can be synced via Occhio air</p>  |   |  |
| <p><b>colors</b></p> <p><b>materials</b></p> <p><b>phantom/black phantom</b></p>  | <p><b>65-165 cm</b>    <input checked="" type="radio"/> <b>135-235 cm</b></p> <p>2.504,20    2.705,88</p> <p>+268,91</p> <p>+403,36</p> <p><input checked="" type="radio"/> special lengths up to 500 cm possible (surcharge per head +319,33, discountable)</p> | <p><b>65-165 cm</b>    <input checked="" type="radio"/> <b>135-235 cm</b></p> <p>3.021,85    3.223,67</p>  | <p>2.031,93</p> <p>+268,91</p> <p>+403,36</p>   |   |  |
| <p><b>control</b></p>   | <p><b>features</b></p> <p>»color tune«, »up/down fading«, switch- and continuously dimmable<br/>via »touchless control« (can be deactivated) and Occhio air (optional)</p>   | <p><b>Mito set box</b></p> <p>features adjustable via »touchless control«<br/>(no external dimming). Alternative: color temperature<br/>2700 K/3000 K/3500 K/4000 K and »up/down fading«<br/>adjustable, dimmable via trailing-edge phase<br/>cut dimmer (not for »x-tra warm«)</p>  | <p><b>Mito »air« box</b> </p> <p>Bluetooth control integrated in luminaire. Features via<br/>Occhio air app or »air« controller (optional) controllable<br/>(no external dimming)</p> <p>+ 82,35</p> | <p><b>Mito DALI box</b></p> <p>external control via DALI<br/>(no »touchless control«)<br/>version track: only for OneTrack by Eutrac/Stucchi track</p> <p>+ 82,35</p>   |  |
| <p><b>options</b></p>   | <p><b>light source</b></p> <p>high color LED CRI95</p> <p><b>2700 K-4000 K</b><br/>with set, »air« or<br/>DALI box</p> <p><input checked="" type="radio"/> <b>2200 K-3500 K »x-tra warm«</b><br/>only with »air« or DALI box<br/>+ 420,17</p>                    | <p><b>lighting effects</b></p> <p><b>room</b>    <b>table</b></p> <p> diffuse     flood<br/> narrow     wide</p> | <p><b>surfaces</b></p>  | <p><b>head colors</b></p> <p>matt white <br/>matt black <br/>matt silver <br/>matt gold </p> <p><b>materials/phantom/black phantom</b></p> <p>rose gold <br/>bronze <br/>phantom <br/>black phantom </p> <p>*canopy in matt black (surcharge + 201,68) <input checked="" type="radio"/><br/>The surfaces rose gold, bronze, phantom and black phantom may differ slightly from other product lines.</p> | <p><b>canopy</b></p> <p>matt white <br/>matt black* </p> |
| <p><b>further options</b></p>   | <p>- accessories for Occhio air from page 226</p>  | <p>These and further options can be configured at<br/><b>Occhio Digital Order System (DOS)</b></p>   | <p><b>further information</b></p>   | <p>- technical data, information on control<br/>and on mounting options view pages 74-81</p>  |  |

# Mito linear

ceiling luminaires  
alto 40



flat

for hollow ceiling  
height 32 mm, length 37 cm, 15 W (800 lm)  
incl. remote converter



up

for surface-mounted installation  
height 52 mm, length 37 cm, 15 W (800 lm)  
incl. converter



pure

recessed installation in hollow ceiling, incl. mounting board,  
power supply integrated in luminaire  
height 20 mm, length 37 cm, 15 W (800 lm)  
incl. converter



track

with in-trac adapter, for Eutrac, Erco and Zumtobel 3-phase tracks  
height 52 mm, length 37 cm, 15 W (800 lm)  
incl. converter

**colors** 571,43  
**materials** +67,23  
**phantom/black phantom** +100,84

621,85  
+100,84  
+151,26

806,72  
+100,84  
+151,26

705,88

## alto 70



flat

for hollow ceiling  
height 32 mm, length 70 cm, 30 W (1600 lm)



up

for surface-mounted installation  
height 52 mm, length 70 cm, 30 W (1600 lm)  
incl. converter



pure

recessed installation in hollow ceiling, incl. mounting board,  
power supply integrated in luminaire  
height 20 mm, length 70 cm, 30 W (1600 lm)  
incl. converter



track

with in-trac adapter, for Eutrac, Erco and Zumtobel 3-phase tracks  
height 52 mm, length 70 cm, 30 W (1600 lm)  
incl. converter

**colors** 789,92  
**materials** +100,84  
**phantom/black phantom** +151,26

857,14  
+134,45  
+201,68

1.075,63  
+134,45  
+201,68

941,18

### mounting options (included)



inlay  
(flat/up)



»air« inlay  
(up)



cover for ceiling box  
(flat/up)

**control** **features**  
»color tune«, switch- and continuously dimmable  
via Occhio air (optional)

**Mito set box**  
color temperature 2700 K/3000 K/3500 K/4000 K  
adjustable in steps, dimmable via trailing-edge phase  
cut dimmer (not for »x-tra warm«)

**Mito »air« box**   
Bluetooth control integrated in luminaire,  
features via Occhio air app or »air« controller (optional)  
controllable (no external dimming)  
+82,35

**Mito DALI box**  
version for building control system via DALI  
version track: only for OneTrack by Eutrac/Stucchi track  
+82,35

**options** **light source**  
high color LED CRI95  
**2700 K–4000 K**  
with set, »air« or DALI box

**2200 K–3500 K »x-tra warm«**  
only with »air« or DALI box  
L 40 cm + 126,05  
L 70 cm + 189,08

**lighting effects**  
**narrow** **wide**  
 

### surfaces

### head/inlay colors

matt white  
matt white/matt black  
matt black  
matt black/matt white



matt silver  
matt gold/matt white  
matt gold/matt black



### materials/phantom/black phantom

rose gold/matt white  
rose gold/matt black  
bronze/matt white  
bronze/matt black



phantom/matt white  
phantom/matt black  
black phantom/  
matt white  
black phantom/  
matt black



The surfaces rose gold, bronze, phantom and black phantom may differ slightly from other product lines.

**further options** - accessories for Occhio air from page 226

These and further options can be configured at  
**Occhio Digital Order System (DOS)**

### further information

- technical data, information on control  
and on mounting options view pages 74–81

**Mito linear**  
ceiling luminaires  
alto 100



flat

for hollow ceiling  
height 32 mm, length 103 cm, 45 W (2400 lm)  
incl. remote converter

up

for surface-mounted installation  
height 52 mm, length 103 cm, 45 W (2400 lm)  
incl. converter

pure

recessed installation in hollow ceiling, incl. mounting board,  
power supply integrated in luminaire  
height 20 mm, length 103 cm, 45 W (2400 lm)  
incl. converter

track

with in-trac adapter, for Eutrac, Erco and Zumtobel 3-phase tracks  
height 52 mm, length 103 cm, 45 W (2400 lm)  
incl. converter

|                       |         |
|-----------------------|---------|
| colors                | 991,60  |
| materials             | +151,26 |
| phantom/black phantom | +226,89 |

|                       |          |
|-----------------------|----------|
| colors                | 1.075,63 |
| materials             | +184,87  |
| phantom/black phantom | +277,31  |

|                       |          |
|-----------------------|----------|
| colors                | 1.327,73 |
| materials             | +184,87  |
| phantom/black phantom | +277,31  |

|                       |          |
|-----------------------|----------|
| colors                | 1.159,66 |
| materials             |          |
| phantom/black phantom |          |

mounting options  
(included)



inlay  
(flat/up)



»air« inlay  
(up)



cover for ceiling box  
(flat/up)

control

features

»color tune«, switch- and continuously dimmable  
via Occhio air (optional)

Mito set box

color temperature 2700 K/3000 K/3500 K/4000 K  
adjustable in steps, dimmable via trailing-edge phase  
cut dimmer (not for »x-tra warm«)

Mito »air« box



Bluetooth control integrated in luminaire,  
features via Occhio air app or »air« controller (optional)  
controllable (no external dimming)

Mito DALI box

version for building control system via DALI  
version track: only for OneTrack by Eutrac/Stucchi track

+82,35

+82,35

options

light source

high color LED CRI95

**2700 K–4000 K**  
with set, »air« or  
DALI box

**2200 K–3500 K »x-tra warm«**  
only with »air« or DALI box  
+252,10

lighting effects

narrow



wide



surfaces

head/inlay  
colors

matt white  
matt white/matt black  
matt black  
matt black/matt white



matt silver  
matt gold/matt white  
matt gold/matt black



materials/phantom/black phantom

rose gold/matt white  
rose gold/matt black  
bronze/matt white  
bronze/matt black



phantom/matt white  
phantom/matt black  
black phantom/  
matt white  
black phantom/  
matt black



The surfaces rose gold, bronze, phantom and black phantom may differ slightly from other product lines.

further options

- accessories for Occhio air from page 226

These and further options can be configured at  
**Occhio Digital Order System (DOS)**

further information

- technical data, information on control  
and on mounting options view pages 74–81

# Mito linear

ceiling luminaires  
alto side 40



side flat

for hollow ceiling,  
height 32 mm, length 38 cm, 15 W (800 lm),  
incl. remote converter



side up

for surface-mounted installation  
height 52 mm, length 38 cm, 15 W (800 lm)  
homogeneous wall illumination (wallwash)  
incl. converter



side pure

recessed installation in hollow ceiling, incl. mounting board,  
power supply integrated in luminaire  
height 20 mm, length 38 cm, 15 W (800 lm)  
incl. converter



side track

with in-trac adapter, for Eutrac, Erco and Zumtobel 3-phase tracks  
height 52 mm, length 38 cm, 15 W (800 lm)  
homogeneous wall illumination (wallwash)  
incl. converter

|                       |         |
|-----------------------|---------|
| colors                | 689,08  |
| materials             | +100,84 |
| phantom/black phantom | +151,26 |

|                       |         |
|-----------------------|---------|
| colors                | 739,50  |
| materials             | +117,65 |
| phantom/black phantom | +176,47 |

|                       |         |
|-----------------------|---------|
| colors                | 924,37  |
| materials             | +117,65 |
| phantom/black phantom | +176,47 |

|        |        |
|--------|--------|
| colors | 823,53 |
|--------|--------|

## alto side 70



side flat

for hollow ceiling,  
height 32 mm, length 71 cm, 30 W (1600 lm),  
incl. remote converter



side up

for surface-mounted installation  
height 52 mm, length 71 cm, 30 W (1600 lm)  
homogeneous wall illumination (wallwash)  
incl. converter



side pure

recessed installation in hollow ceiling, incl. mounting board,  
power supply integrated in luminaire  
height 20 mm, length 38 cm, 15 W (800 lm)  
incl. converter



side track

with in-trac adapter, for Eutrac, Erco and Zumtobel 3-phase tracks  
height 52 mm, length 71 cm, 30 W (1600 lm)  
homogeneous wall illumination (wallwash)  
incl. converter

|                       |         |
|-----------------------|---------|
| colors                | 924,37  |
| materials             | +151,26 |
| phantom/black phantom | +226,89 |

|                       |         |
|-----------------------|---------|
| colors                | 991,60  |
| materials             | +184,87 |
| phantom/black phantom | +277,31 |

|                       |          |
|-----------------------|----------|
| colors                | 1.210,08 |
| materials             | +184,87  |
| phantom/black phantom | +277,31  |

|        |          |
|--------|----------|
| colors | 1.075,63 |
|--------|----------|

### mounting options (included)



inlay  
(flat/up)



»air« inlay  
(up)



cover for ceiling box  
(flat/up)

### control

#### features

»color tune«, switch- and continuously dimmable  
via Occhio air (optional)

#### Mito set box

color temperature 2700 K/3000 K/3500 K/4000 K  
adjustable in steps, dimmable via trailing-edge phase  
cut dimmer (not for »x-tra warm«)

#### Mito »air« box



Bluetooth control integrated in luminaire,  
features via Occhio air app or »air« controller (optional)  
controllable (no external dimming)

+82,35

#### Mito DALI box

version for building control system via DALI  
version track: only for OneTrack by Eutrac/Stucchi track

+82,35

### options

#### light source

high color LED CRI95


**2700 K–4000 K**  
with set, »air« or  
DALI box

● **2200 K–3500 K »x-tra warm«**  
only with »air« or DALI box  
L 40 cm +126,05  
L 70 cm +189,08

#### lighting effects



wallwash



#### surfaces

#### head/inlay colors

matt white  
matt white/matt black  
matt black  
matt black/matt white



matt silver  
matt gold/matt white  
matt gold/matt black



#### materials/phantom/black phantom

rose gold/matt white  
rose gold/matt black  
bronze/matt white  
bronze/matt black



phantom/matt white  
phantom/matt black  
black phantom/  
matt white  
black phantom/  
matt black



The surfaces rose gold, bronze, phantom and black phantom may differ slightly from other product lines.

### further options

- accessories for Occhio air from page 226

These and further options can be configured at  
**Occhio Digital Order System (DOS)**

### further information

- technical data, information on control  
and on mounting options view pages 74–81

**Mito linear**  
ceiling luminaires  
alto side 100



side flat

for hollow ceiling,  
height 32 mm, length 104 cm, 45 W (2400 lm),  
incl. remote converter

side up

for surface-mounted installation  
height 52 mm, length 104 cm, 45 W (2400 lm)  
homogeneous wall illumination (wallwash)  
incl. converter

side pure

recessed installation in hollow ceiling, incl. mounting board,  
power supply integrated in luminaire  
height 20 mm, length 104 cm, 45 W (2400 lm)  
incl. converter

side track

with in-trac adapter, for Eutrac, Erco and Zumtobel 3-phase tracks  
height 52 mm, length 104 cm, 45 W (2400 lm)  
homogeneous wall illumination (wallwash)  
incl. converter

|                       |          |
|-----------------------|----------|
| colors                | 1.176,47 |
| materials             | +184,87  |
| phantom/black phantom | +277,31  |

|                       |          |
|-----------------------|----------|
| colors                | 1.260,50 |
| materials             | +218,49  |
| phantom/black phantom | +327,73  |

|                       |          |
|-----------------------|----------|
| colors                | 1.512,61 |
| materials             | +218,49  |
| phantom/black phantom | +327,73  |

|        |          |
|--------|----------|
| colors | 1.344,54 |
|--------|----------|

mounting options  
(included)



inlay  
(flat/up)



»air« inlay  
(up)



cover for ceiling box  
(flat/up)

control

features

»color tune«, switch- and continuously dimmable  
via Occhio air (optional)

Mito set box

color temperature 2700 K/3000 K/3500 K/4000 K  
adjustable in steps, dimmable via trailing-edge phase  
cut dimmer (not for »x-tra warm«)

Mito »air« box



Bluetooth control integrated in luminaire,  
features via Occhio air app or »air« controller (optional)  
controllable (no external dimming)

+82,35

Mito DALI box

version for building control system via DALI  
version track: only for OneTrack by Eutrac/Stucchi track

+82,35

options

light source

high color LED CRI95


2700 K–4000 K  
with set, »air« or  
DALI box

2200 K–3500 K »x-tra warm«  
only with »air« or DALI box  
+252,10

lighting effects



wallwash



surfaces

head/inlay  
colors

matt white  
matt white/matt black  
matt black  
matt black/matt white



matt silver  
matt gold/matt white  
matt gold/matt black



materials/phantom/black phantom

rose gold/matt white  
rose gold/matt black  
bronze/matt white  
bronze/matt black



phantom/matt white  
phantom/matt black  
black phantom/  
matt white  
black phantom/  
matt black



The surfaces rose gold, bronze, phantom and black phantom may differ slightly from other product lines.

further options

- accessories for Occhio air from page 226

These and further options can be configured at  
**Occhio Digital Order System (DOS)**

further information


- technical data, information on control  
and on mounting options view pages 74–81

# Mito volo mounting options

**volò flat**  
with flat base for mounting on hollow ceiling,  
remote power supply

- ☺ synchronization of multiple luminaires via »air« sync possible (prerequisite all luminaires with »air« and same type)


☺ integrated set box (standard),  
»air« box optional or DALI box

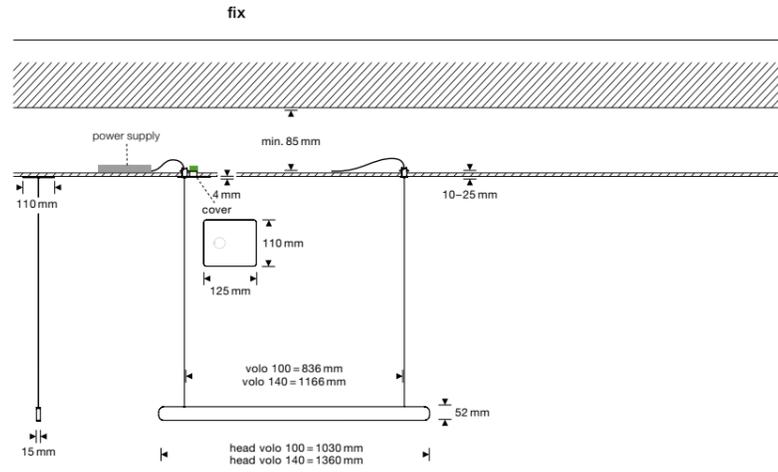

**volò track**  
for track mounting in Eutrac, Erco and Zumtobel 3-phase track (DALI version only compatible with OneTrack by Eutrac/Stucchi track), with integrated power supply

- ☺ synchronization of multiple luminaires via »air« sync possible (prerequisite all luminaires with »air« and same type)


☺ integrated set box (standard),  
»air« box optional or DALI box

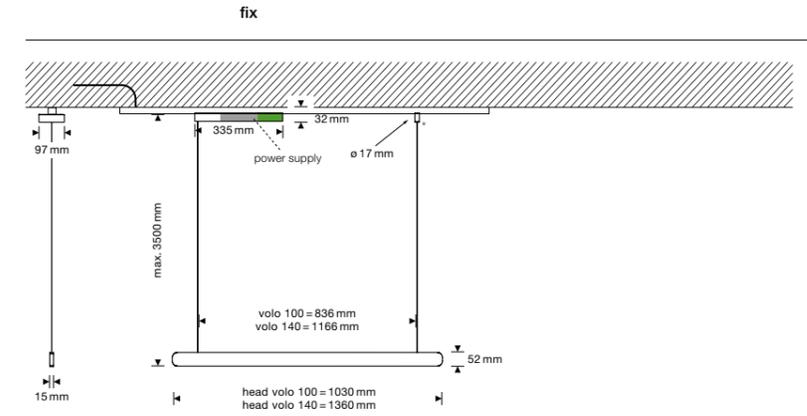

**volò up**  
for surface mounting with integrated power supply, through-wiring possible

- ☺ synchronization of multiple luminaires via »air« sync possible (prerequisite all luminaires with »air« and same type)


☺ integrated set box (standard),  
»air« box optional or DALI box

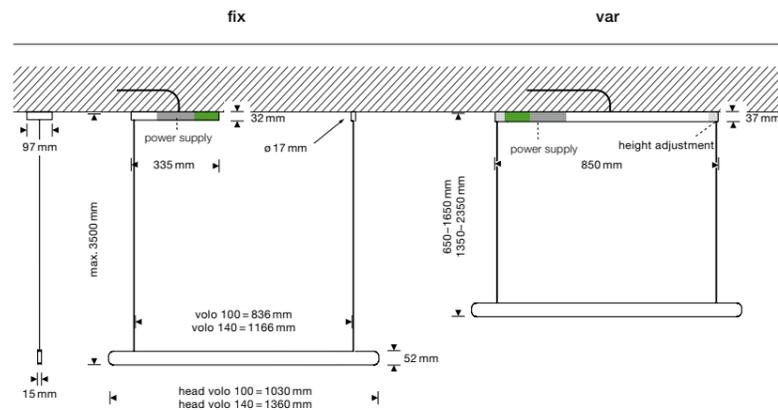

**volò var pure**  
with plastering element for flush ceiling-mounted installation, with integrated power supply, through-wiring possible

- ☺ synchronization of multiple luminaires via »air« sync possible (prerequisite all luminaires with »air« and same type)


☺ integrated set box (standard),  
»air« box optional or DALI box

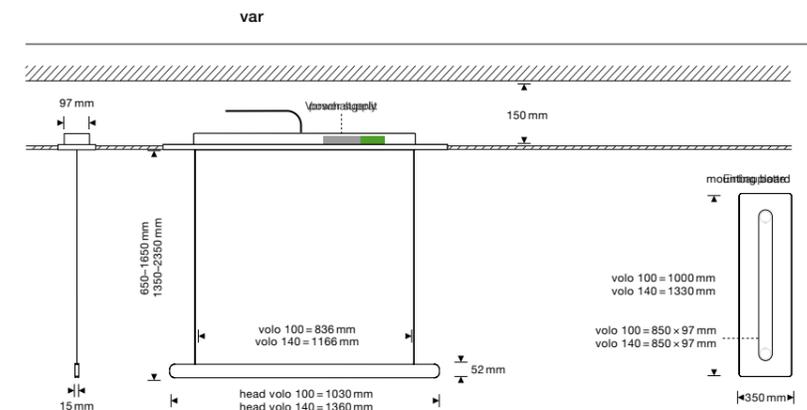

**volò up midfeed**  
for surface mounted installation and midfeed with integrated power supply, through-wiring possible

- ☺ synchronization of multiple luminaires via »air« sync possible (prerequisite all luminaires with »air« and same type)


☺ integrated set box (standard),  
»air« box optional or DALI box

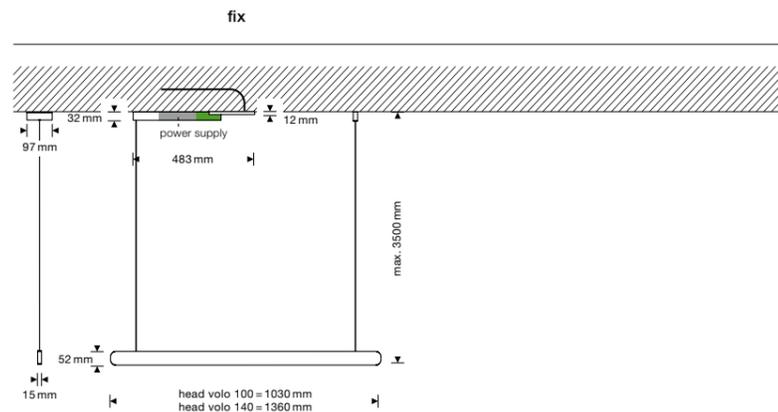

# Mito alto mounting options


**alto flat**  
for hollow ceiling mounting with remote power supply

 inclusive set box (standard),  
»air« box optional or DALI box

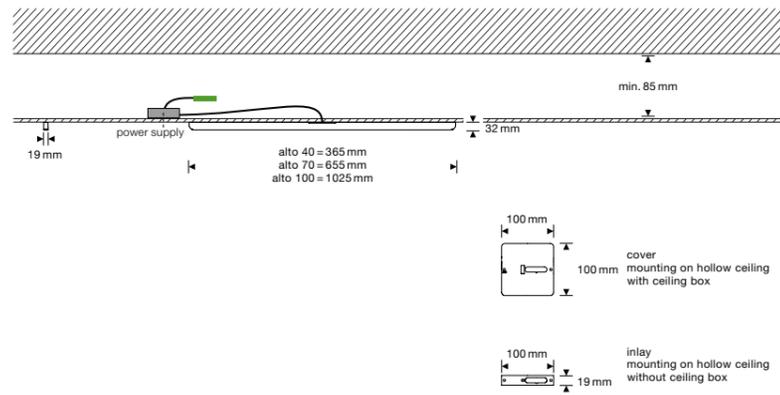


**alto up**  
for surface mounting with integrated power supply

 integrated set box (standard),  
»air« box optional or DALI box

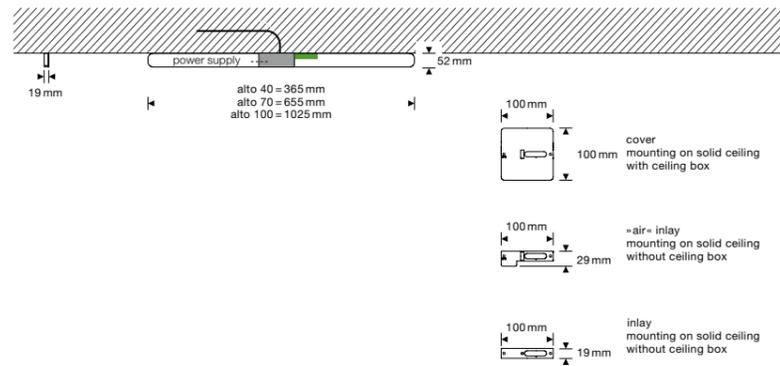


**alto track**  
for track mounting in Eutrac, Erco and Zumtobel 3-phase track (DALI version only compatible with OneTrack by Eutrac/Stucchi track), with integrated power supply

 integrated set box (standard),  
»air« box optional or DALI box

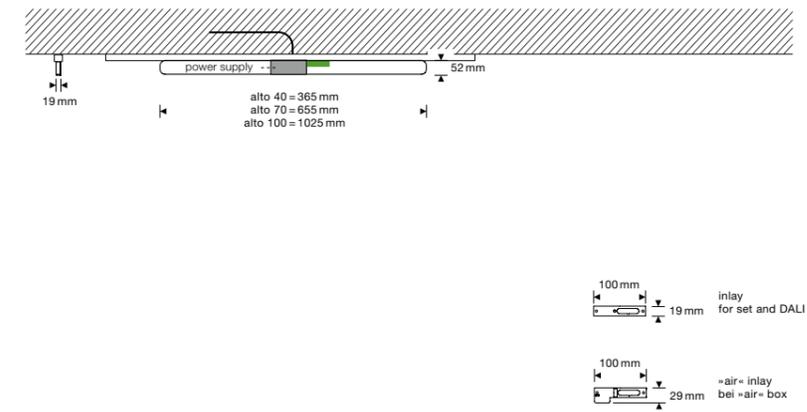


**alto pure**  
for recessed mounting with plastering element with integrated power supply

 integrated set box (standard),  
»air« box optional or DALI box

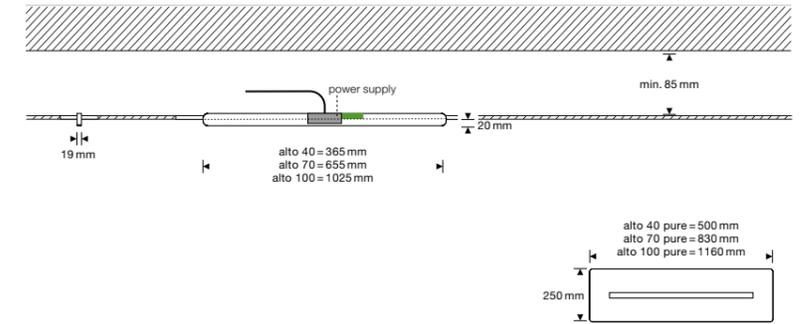

# Mito alto side mounting options


**alto side flat**  
for hollow ceiling mounting with remote power supply

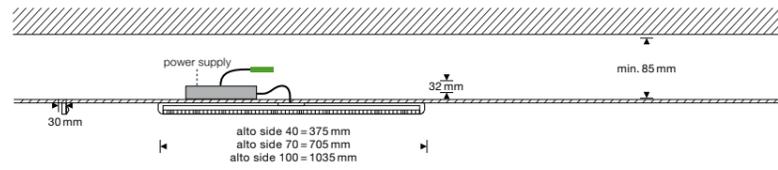


recommended wall distance  
for homogenous wall illumination:

approx. 70 cm at 250 cm room height  
approx. 85 cm at 300 cm room height

 inclusive set box (standard),  
optional mit »air« box oder DALI box

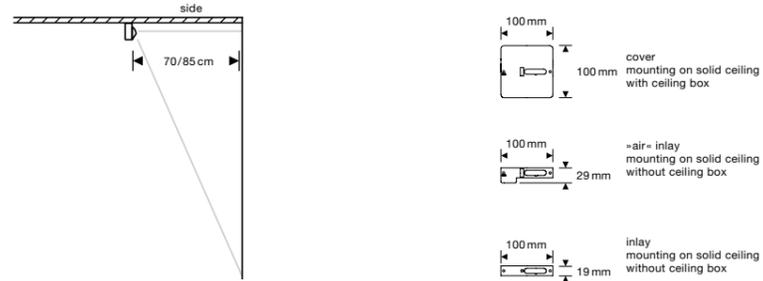


**alto side up**  
for surface mounting with integrated power supply

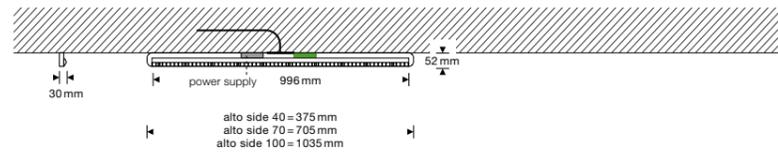


recommended wall distance  
for homogenous wall illumination:

approx. 70 cm at 250 cm room height  
approx. 85 cm at 300 cm room height

 integrated set box (standard),  
»air« box optional or DALI box

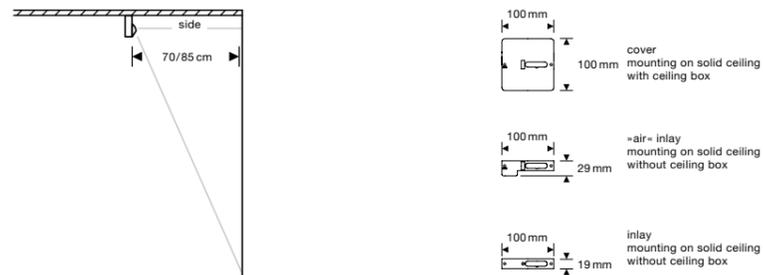

**alto side track**  
for track mounting in Eutrac, Erco and Zumtobel 3-phase track (DALI version only compatible with OneTrack by Eutrac/Stucchi track), with integrated power supply

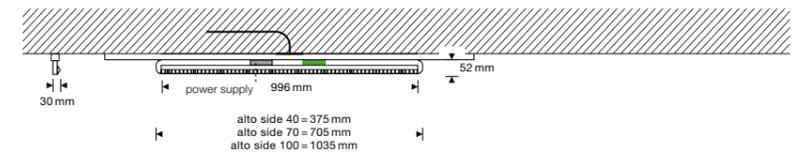


recommended wall distance  
for homogenous wall illumination:

approx. 70 cm at 250 cm room height  
approx. 85 cm at 300 cm room height

 integrated set box (standard),  
»air« box optional or DALI box



**alto side pure**  
for recessed mounting with plastering element with integrated power supply

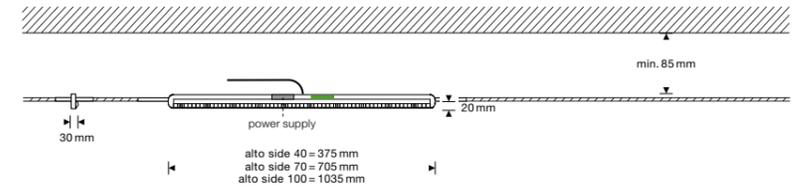

recommended wall distance  
for homogenous wall illumination:

approx. 70 cm at 250 cm room height  
approx. 85 cm at 300 cm room height

 integrated set box (standard),  
»air« box optional or DALI box



## Mito linear technical data


|  |                   |                   |                                      |                                 |                      |             |             |                   |
|--|-------------------|-------------------|--------------------------------------|---------------------------------|----------------------|-------------|-------------|-------------------|
| <b>version »color tune«</b>                  | <b>connection</b> | U                 | 230V AC                              |                                 |                      |             |             |                   |
|  |                   | W                 | volò 100                             | -45 W                           |                      |             |             |                   |
|  |                   |                   | volò 140                             | -60 W                           |                      |             |             |                   |
|  |                   |                   | alto/alto side 40                    | -15 W                           |                      |             |             |                   |
|  |                   |                   | alto/alto side 70                    | -30 W                           |                      |             |             |                   |
|  |                   |                   | alto/alto side 100                   | -45 W                           |                      |             |             |                   |
|  |                   |                   | terra                                | -70 W (56 W materials, phantom) |                      |             |             |                   |
| <b>average service life</b>                  | t                 |                   | > 50.000 h                           |                                 |                      |             |             |                   |
| <b>energy efficiency class</b>               | EEK               |                   | G                                    |                                 |                      |             |             |                   |
| <b>LED color temperature</b>                 | T                 | <b>high color</b> | 2700–4000K                           |                                 |                      |             |             | <b>x-tra warm</b> |
| <b>Color Rendering Index recommended use</b> | CRI               |                   | Ra 95 residential, public and office |                                 |                      |             |             | Ra 95 residential |
| <b>power</b>                                 | P                 | <b>15 W</b>       | <b>30 W</b>                          | <b>45 W</b>                     | <b>56 W</b>          | <b>60 W</b> | <b>70 W</b> |                   |
| <b>luminous flux luminaire</b>               | φ                 |                   |                                      |                                 | (materials, phantom) |             | (colors)    |                   |
| <b>volò</b>                                  |                   |                   |                                      |                                 |                      |             |             |                   |
| lighting effect table (wide)                 |                   |                   |                                      |                                 |                      | 2900 lm     | 3900 lm     |                   |
| lighting effect room (narrow)                |                   |                   |                                      |                                 |                      | 2800 lm     | 3700 lm     |                   |
| <b>alto</b>                                  |                   |                   |                                      |                                 |                      |             |             |                   |
| lighting effect wide                         |                   | 800 lm            | 1600 lm                              | 2400 lm                         |                      |             |             |                   |
| lighting effect narrow                       |                   | 800 lm            | 1600 lm                              | 2400 lm                         |                      |             |             |                   |
| <b>alto side</b>                             |                   |                   |                                      |                                 |                      |             |             |                   |
| lighting effect wallwash                     |                   | 800 lm            | 1600 lm                              | 2400 lm                         |                      |             |             |                   |
| <b>terra/terra table top/terra 3d</b>        |                   |                   |                                      |                                 |                      |             |             |                   |
| lighting effect table (wide)                 |                   |                   |                                      |                                 |                      | 3600 lm     | 4600 lm     |                   |

## Mito linear control

### control

Mito linear luminaires can be dimmed via »touchless control« (volò, terra), »body sensor« (terra) and Occhio air (standard for terra; optional for volò, alto). Alternatively dimming via trailing-edge phase cut\* or DALI is possible (not terra).

### Mito set box

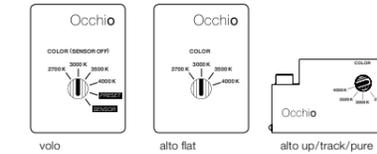

**volò**  
COLOR (sensor off)  
adjustable color temperature (4 steps),  
trailing-edge phase cut dimming\* possible

**alto**  
COLOR  
adjustable color temperature (4 steps)  
trailing-edge phase cut dimming\* possible

**PRESET**  
adjustable color temperature (4 steps),  
adjustable up/downlight ratio (5 steps)

**SENSOR**  
»touchless control« (gesture control),  
switching, dimming, »up/down fading«,  
»color tune« (color temperature continuously adjustable),  
no external dimming possible

### Mito »air« box



**Occhio air** control via Bluetooth—switching, dimming, »up/down fading« (volò, terra) and »color tune« of individual luminaires, groups and scenes.

**volò**  
SENSOR  
»air« + »touchless control« (Bluetooth and gesture control),  
control via »touchless control« and Occhio air app or »air« controller,  
switching, dimming, »up/down fading«,  
»color tune« (color temperature continuously adjustable)

**alto**  
»air« (Bluetooth control),  
control via Occhio air app or »air« controller,  
switching, dimming,  
»color tune« (color temperature continuously adjustable)

**SENSOR OFF**  
»air« (Bluetooth control),  
control via Occhio air app or »air« controller,  
switching, dimming, »up/down fading«,  
»color tune« (color temperature continuously adjustable)

**terra/terra 3d/terra table top**  
Bluetooth control integrated in power supply  
»air« + »touchless control« (Bluetooth and gesture control) and »body sensor«,  
control via »touchless control«, »body sensor« and Occhio air app or »air« controller,  
switching, dimming, »up/down fading«,  
»color tune« (color temperature continuously adjustable)


»ambient light control«  
adaption to ambient light

»presence sensor«  
presence recognition and automatic switch-off via motion sensor

control and sensors via Occhio »air«, App deactivable and adjustable

No external dimming possible with Mito »air« box

### Mito DALI box

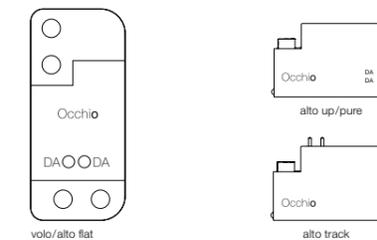

### control via DALI

**volò**  
– adjustable color temperature\*\*  
– continuously dimmable  
– uplight and downlight separately controllable (two DALI addresses required)  
– no »touchless control«, no »up/down fading«


**alto**  
– adjustable color temperature\*\*  
– continuously dimmable

\*compatible dimmers: [www.occhio.com/dim](http://www.occhio.com/dim)  
\*\*A DALI controller »DALI device type 8 (DT8)« is required to control the light color.  
Further information can be found at [www.occhio.com/dali](http://www.occhio.com/dali)

X series

# Gioia

New Horizons – infinite mobility, fascinating weightlessness and an almost sculptural appearance. Gioia, that means joy – joy in the magic of perfect light.

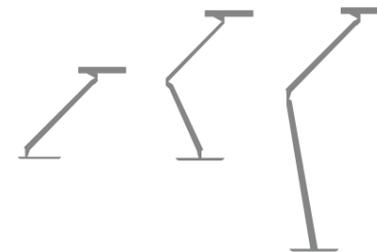

**Gioia**  
table luminaires

**Gioia**  
reading luminaire



tavolo

height head adjustable: 28–75 cm,  
ø head 30 cm, 30 W (1830 lm),  
head and body 360° rotatable



equilibrio

height head adjustable: 62–96 cm,  
ø head 30 cm, 30 W (1830 lm),  
head and body 360° rotatable



lettura

height head adjustable: 120–166 cm,  
ø head 30 cm, 30 W (1830 lm),  
head and body 360° rotatable

|                              |          |
|------------------------------|----------|
| <b>colors</b>                | 2.084,03 |
| <b>materials</b>             | +168,07  |
| <b>phantom/black phantom</b> | +252,10  |


2.974,79

|                              |          |
|------------------------------|----------|
| <b>colors</b>                | 3.310,92 |
| <b>materials</b>             | +168,07  |
| <b>phantom/black phantom</b> | +252,10  |

|                |  |
|----------------|--|
| <b>control</b> | <b>features</b>  |
|                | »color tune«, »up/down fading«, »focus light«, switch- and dimmable via »touchless control«, additionally controllable via Occhio air (included) |

|   |
|---|
| <b>Occhio air</b>                          |
| Bluetooth control integrated in power supply, features controllable via Occhio air app or »air« controller, no external dimming |

|                |                          |
|----------------|--------------------------|
| <b>options</b> | <b>light source</b>      |
|                | »color tune« 2700K–4000K |



|   |
|---|
| <b>desk mount</b> (only Gioia tavolo)                           |
| for inserted mounting in table tops, thickness 10–45 mm -134,46 |

**surfaces**

**head/body+base colors**

matt white/matt white  
matt black/matt black  
matt silver/matt black  
matt gold/matt white  
matt gold/matt black



**materials/phantom/black phantom**

rose gold/matt black  
bronze/matt black  
phantom/matt black  
black phantom/matt black




The surfaces rose gold, bronze, phantom and black phantom may differ slightly from other product lines.

**further options** These and further options can be configured at **Occhio Digital Order System (DOS)**

**further information** - technical data, information on control and mounting options view pages 86–87

## Gioia mounting options

**desk mount** (optional for Gioia tavolo)  
for inserted mounting in table tops,  
thickness 10–45 mm

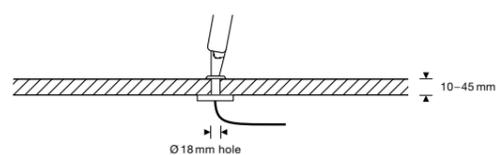

- 134,46

## Gioia technical data and control

version »color tune«

|                                |     |            |
|--------------------------------|-----|------------|
| <b>connection</b>              | U   | 230 V AC   |
|                                | W   | 30 W       |
| <b>average service life</b>    | t   | > 50.000 h |
| <b>energy efficiency class</b> | EEK | G          |

|                              |     |                                |
|------------------------------|-----|--------------------------------|
| <b>LED</b>                   |     | <b>high color</b>              |
| <b>color temperature</b>     | T   | 2700–4000 K                    |
| <b>Color Rendering Index</b> | CRI | Ra 95                          |
| <b>recommended use</b>       |     | residential, public and office |

|                                |        |                   |
|--------------------------------|--------|-------------------|
| <b>power</b>                   | P      | <b>24 W (LED)</b> |
| <b>luminous flux luminaire</b> | $\phi$ |                   |

|                                   |  |         |
|-----------------------------------|--|---------|
| <b>lighting effect switchable</b> |  |         |
| lighting effect wide              |  | 1830 lm |
| lighting effect »focus light«     |  | 610 lm  |

**control**

Gioia luminaires can be dimmed via »touchless control« and Occhio air (standard).  
A second »touchless control« sensor allows to switch the lighting effect between wide and »focus light«.

**Gioia »air« box** (standard)



Gioia

*Occhio air  
powered by  
Casambi*

 **Occhio air** control via Bluetooth—switching, dimming, »up/down fading« and »color tune« of individual luminaires, groups and scenes as well as »focus light«

**Taglio tavolo/tavolo fix**  
Bluetooth control integrated in power supply »air«  
+ »touchless control« (Bluetooth and gesture control)  
control via »touchless control« and Occhio air app or  
»air« controller, switching, dimming, »up/down fading«,  
»color tune« (color temperature continuously adjustable),  
»focus light« (switchable lighting effect)

control and sensors via Occhio air,  
app deactivable and adjustable

No external dimming

X series

# Taglio

Absolute clarity: striking, linear design combined with fascinating mobility and maximum »joy of use« create focus on the essence.



**Taglio**  
table luminaires



tavolo fix

height head: 52 cm,  
head 47 cm, 20 W (790 lm),  
head and body 360° rotatable



tavolo

height head adjustable: 33–72 cm  
head 47 cm, 20 W (790 lm),  
head and body 360° rotatable

|                              |          |
|------------------------------|----------|
| <b>colors</b>                | 1.050,42 |
| <b>materials</b>             | +100,84  |
| <b>phantom/black phantom</b> | +151,26  |

|          |
|----------|
| 1.470,59 |
| +100,84  |
| +151,26  |

|                |   |   |
|----------------|---|---|
| <b>control</b> | <b>features</b>   | <b>Occhio air</b> (optional)               |
|                | »color tune«, »up/down fading«, switch- and dimmable via »touchless control«, additionally controllable via Occhio air (optional) | Bluetooth control integrated in power supply, features controllable via Occhio air app or »air« controller, no external dimming |
|                |   | +82,35  |

|                |   |   |                 |  |   |
|----------------|---|---|-----------------|--|---|
| <b>options</b> | <b>light source</b><br>»color tune« 2700K–4000K | <b>desk mount</b><br>for inserted mounting in table tops, thickness 10–45 mm<br>-134,46 | <b>surfaces</b> | <b>head/body+base colors</b><br>matt white/matt white<br>matt black/matt black<br>matt silver/matt black<br>matt gold/matt white<br>matt gold/matt black | <b>materials/phantom/black phantom</b><br>rose gold/matt black<br>bronze/matt black<br>phantom/matt black<br>black phantom/matt black |
|----------------|---|---|-----------------|--|---|


The surfaces rose gold, bronze, phantom and black phantom may differ slightly from other product lines.

**further options** These and further options can be configured at **Occhio Digital Order System (DOS)**

**further information** - technical data, information on control and mounting options view pages 92–93

## Taglio mounting options

**desk mount** (optional)  
for inserted mounting in table tops,  
thickness 10–45 mm

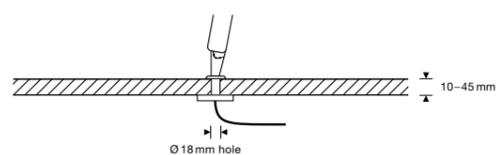

-134,46

## Taglio technical data and control

version »color tune«

|                                |     |            |
|--------------------------------|-----|------------|
| <b>connection</b>              | U   | 230 V AC   |
|                                | W   | 20 W       |
| <b>average service life</b>    | t   | > 50.000 h |
| <b>energy efficiency class</b> | EEK | G          |

|                              |     |                                |
|------------------------------|-----|--------------------------------|
| <b>LED</b>                   |     | <b>high color</b>              |
| <b>color temperature</b>     | T   | 2700–4000 K                    |
| <b>Color Rendering Index</b> | CRI | Ra 95                          |
| <b>recommended use</b>       |     | residential, public and office |

|                                |        |                   |
|--------------------------------|--------|-------------------|
| <b>power</b>                   | P      | <b>15 W (LED)</b> |
| <b>luminous flux luminaire</b> | $\phi$ |                   |

|                 |        |
|-----------------|--------|
| 100 % downlight | 790 lm |
| 100 % uplight   | 360 lm |
| up+downlight    | 690 lm |

**control**

Taglio luminaires can be dimmed via »touchless control« and Occhio air.

**Taglio »air« box**

 **Occhio air** control via Bluetooth – switching, dimming, »up/down fading« and »color tune« of individual luminaires, groups and scenes.



Taglio

*Occhio air  
powered by  
Casambi*

**Taglio tavolo/tavolo fix**  
Bluetooth control integrated in power supply »air«  
+ »touchless control« (Bluetooth and gesture control)  
control via »touchless control« and Occhio air app or  
»air« controller, switching, dimming, »up/down fading«,  
»color tune« (color temperature continuously adjustable)


control and sensors via Occhio air,  
app deactivable and adjustable

No external dimming

L series

# Sento

The innovative, modular luminaire system for residential and public areas. With Sento you can define light precisely and thus make your own design statement.

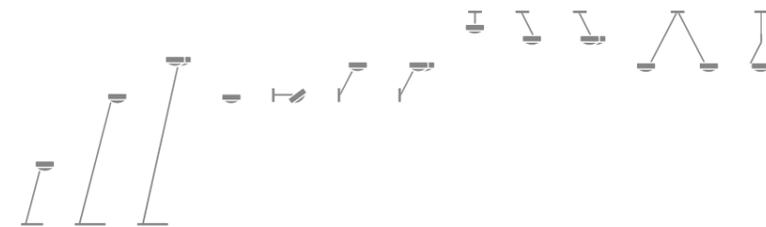

# Sento

table- and floor luminaires



head 360° rotatable  
body turnable (can be fixed)  
incl. plug-in power supply

|  |                                  |   |                                   |
|--|----------------------------------|---|-----------------------------------|
| <b>60 cm</b><br>swivel range 40°<br>Ⓢ can be synced via Occhio air | <b>80 cm</b><br>swivel range 40° | <b>125 cm</b><br>swivel range 18°<br>Ⓢ can be synced via Occhio air | <b>160 cm</b><br>swivel range 12° |
|--|----------------------------------|---|-----------------------------------|

|  |                                   |
|--|-----------------------------------|
| heads 360° rotatable<br>body turnable (can be fixed)<br>incl. controller<br>Ⓢ can be synced via Occhio air | <b>180 cm</b><br>swivel range 12° |
|--|-----------------------------------|

## versions

|  |                       |                              |          |          |          |          |                               |          |
|--|-----------------------|------------------------------|----------|----------|----------|----------|-------------------------------|----------|
|  | <b>18 W</b> (1170 lm) | <b>chrome/colors</b>         | 1.186,55 | 1.243,70 | 1.378,15 | 1.462,18 | <b>2 x 26 W</b> (2 x 1620 lm) | 2.336,13 |
|  |                       | <b>materials</b>             | +67,23   |          |          |          |                               | +134,45  |
|  |                       | <b>phantom/black phantom</b> | +100,84  |          |          |          |                               | +201,68  |

**E**  
diffusor glass/lens 80°

|  |                       |                              |          |          |          |          |                               |          |
|--|-----------------------|------------------------------|----------|----------|----------|----------|-------------------------------|----------|
|  | <b>18 W</b> (1270 lm) | <b>chrome/colors</b>         | 1.235,29 | 1.292,44 | 1.426,89 | 1.510,92 | <b>2 x 26 W</b> (2 x 1620 lm) | 2.433,61 |
|  |                       | <b>materials</b>             | +67,23   |          |          |          |                               | +134,45  |
|  |                       | <b>phantom/black phantom</b> | +100,84  |          |          |          |                               | +201,68  |

**D**  
lens  
80°



## control

### features

»up/down fading« (with double-sided light output), switchable and dimmable via »touchless control« or Occhio air (optional), power 18/26 W switchable (tavolo and lettura only 18 W)

### Occhio air

Bluetooth control integrated directly in the head, features via Occhio air app or »air« controller (optional)

+82,35

## inserts

|             |                |       |  |   |       |
|-------------|----------------|-------|--|---|-------|
|             | filter red     | 35,29 |  | soft edge glass (for lens)<br>light cone with soft contour approx. 80°  | 28,57 |
|             | filter green   |       |  | satinised glass (for lens)<br>light cone with soft contour approx. 100° | 18,49 |
|             | filter blue    |       |  |   |       |
|             | filter yellow  |       |  |   |       |
|             | filter magenta |       |  |   |       |
| (max. 18 W) |                |       |  |   |       |

## options

### light source

2700 K or 3000 K, perfect color LED CRI 97

## surfaces

### head

#### chrome/colors

shiny chrome  
matt chrome  
glossy white  
matt white  
matt black



#### materials

matt gold  
matt gold



rose gold  
bronze



phantom



black phantom



phantom



black phantom



phantom




black phantom



phantom



black phantom



phantom



black phantom



phantom



black phantom

### body/base

shiny chrome  
matt chrome  
shiny chrome/glossy white  
matt white  
matt black



shiny chrome



matt chrome



shiny chrome/glossy white



matt white



matt black

The surfaces rose gold, bronze, phantom and black phantom may differ slightly from other product lines.

## further options

- further lighting effects view page 110  
- accessories for Occhio air from page 226

These and further options can be configured at  
**Occhio Digital Order System (DOS)**

## further information

- technical data and information on control view page 111

# Sento

wall luminaires



## verticale




## letto

|                     |                                |  |  |  |
|---------------------|--------------------------------|--|--|--|
| head 360° rotatable | <b>up/flat</b>                 | <b>20 cm, up/flat</b><br>swivel range 105° | <b>30 cm, up/flat</b><br>swivel range 115° | <b>40 cm, up/flat</b><br>swivel range 140° |
|                     | 🔗 can be synced via Occhio air | 🔗 can be synced via Occhio air             |  |  |

| versions                            |                                    |                              |         |         |        |        |
|-------------------------------------|------------------------------------|------------------------------|---------|---------|--------|--------|
|                                     | <b>26 W</b> (1620 lm)              | <b>chrome/colors</b>         | 662,18  | 783,19  | 791,60 | 801,68 |
|                                     |                                    | <b>materials</b>             | +67,23  | +67,23  |        |        |
|                                     |                                    | <b>phantom/black phantom</b> | +100,84 | +100,84 |        |        |
| <b>E</b><br>diffusor glass/lens 80° |                                    |                              |         |         |        |        |
|                                     | <b>26 W</b> (1750 lm)              | <b>chrome/colors</b>         | 710,92  | 831,93  | 840,34 | 850,42 |
|                                     |                                    | <b>materials</b>             | +67,23  | +67,23  |        |        |
|                                     |                                    | <b>phantom/black phantom</b> | +100,84 | +100,84 |        |        |
| <b>D</b><br>lens/lens<br>80°/80°    |                                    |                              |         |         |        |        |
|                                     | <b>26 W</b> (1570 lm)              | <b>chrome/colors</b>         | 573,11  | 694,12  | 702,52 | 712,61 |
|                                     |                                    | <b>materials</b>             | +67,23  | +67,23  |        |        |
|                                     |                                    | <b>phantom/black phantom</b> | +100,84 | +100,84 |        |        |
| <b>C</b><br>lens<br>80°             |                                    |                              |         |         |        |        |
|                                     | with carbon handle (incl.)         |                              |         |         |        |        |
|                                     | with fixing ring (price reduction) | -5,04                        |         |         |        |        |

orientation: left/right selectable (view from above)



|                |   |   |  |   |
|----------------|---|---|--|---|
| <b>control</b> | <b>features</b>   | <b>Occhio air</b>   | <b>inserts</b>   |   |
|                | »up/down fading« (with double-sided light output), switchable and dimmable via »touchless control« (can be deactivated) or Occhio air (optional), alternatively dimmable via trailing-edge phase cut dimmer | Bluetooth control integrated in the head, features via Occhio air app or »air« controller (optional), no external dimming | <ul style="list-style-type: none"> <li>filter red 35,29</li> <li>filter green</li> <li>filter blue</li> <li>filter yellow</li> <li>filter magenta</li> </ul> (max. 18 W) | <ul style="list-style-type: none"> <li>soft edge glass (for lens) light cone with soft contour approx. 80° 28,57</li> <li>satinised glass (for lens) light cone with soft contour approx. 100° 18,49</li> </ul> |
|                |   | +82,35  |  |   |

|                |  |  |  |  |
|----------------|--|--|--|--|
| <b>options</b> | <b>light source</b>                        | <b>mounting options</b>  | <b>surfaces</b>  | <b>body/base</b>   |
|                | 2700 K or 3000 K, perfect color LED CRI 97 | <b>up</b> with integrated converter for surface mounting, through-wiring possible<br><b>flat</b> with flat base for hollow wall with cavity box (incl. remote converter) | <b>head chrome/colors</b><br>shiny chrome, matt chrome, glossy white, matt white, matt black<br><b>materials</b><br>matt gold, rose gold, bronze<br><b>phantom/black phantom</b><br>phantom, black phantom | shiny chrome, matt chrome, shiny chrome/glossy white, matt white, matt black |

The surfaces rose gold, bronze, phantom and black phantom may differ slightly from other product lines.

|                        |  |   |                            |  |
|------------------------|--|---|----------------------------|--|
| <b>further options</b> | - further lighting effects view page 110<br>- further mounting accessories view page 108<br>- accessories for Occhio air from page 226 | These and further options can be configured at <b>Occhio Digital Order System (DOS)</b> | <b>further information</b> | - technical data, information on control and mounting options view pages 109–111 |
|------------------------|--|---|----------------------------|--|

# Sento

wall luminaires



## parete singolo



## parete doppio

head 360° rotatable

**20 cm, up/flat**  
swivel range 120°

**30 cm, up/flat**  
swivel range 120°

**40 cm, up/flat**  
swivel range 120°

📶 can be synced via Occhio air

**20 cm, up/flat**  
swivel range 120°

**30 cm, up/flat**  
swivel range 120°

**40 cm, up/flat**  
swivel range 120°

📶 can be synced via Occhio air

### versions



**26 W** (1620 lm)

**chrome/colors**

783,19

791,60

801,68

**2 x 26 W** (2 x 1620 lm)

1.381,51

1.388,24

1.396,64

**materials**

+67,23

**phantom/black phantom**

+100,84

+134,45

+201,68

### E

diffusor glass/lens 80°



**26 W** (1750 lm)

**chrome/colors**

831,93

840,34

850,42

**2 x 26 W** (2 x 1750 lm)

1.478,99

1.485,71

1.494,12

**materials**

+67,23

**phantom/black phantom**

+100,84

+134,45

+201,68

### D

lens/lens  
80°/80°



**26 W** (1570 lm)

**chrome/colors**

694,12

702,52

712,61

**2 x 26 W** (2 x 1570 lm)

1.203,36

1.210,08

1.218,49

**materials**

+67,23

**phantom/black phantom**

+100,84

+134,45

+201,68

### C

lens  
80°

### control

#### features

»up/down fading« (with double-sided light output), switchable and dimmable via »touchless control« (can be deactivated) or Occhio air (optional), dimmable via trailing-edge phase cut dimmer

#### Occhio air



Bluetooth control integrated in the head, features via Occhio air app or »air« controller (optional), no external dimming

+82,35

### inserts

— filter red 35,29  
— filter green  
— filter blue  
— filter yellow  
— filter magenta  
 (max. 18 W)

— soft edge glass (for lens) 28,57  
 light cone with soft contour approx. 80°  
— satinised glass (for lens) 18,49  
 light cone with soft contour approx. 100°

### options

#### light source

2700 K or 3000 K, perfect color LED CRI 97

#### mounting options



with integrated converter for surface mounting, through-wiring possible



with flat base for hollow wall with cavity box (incl. remote converter)

#### surfaces

##### head

shiny chrome  
 matt chrome  
 glossy white  
 matt white  
 matt black

##### materials

matt gold  
 matt gold  
 rose gold  
 bronze

##### phantom/black phantom

phantom  
 black phantom

#### body/base

shiny chrome  
 matt chrome  
 shiny chrome/glossy white  
 matt white  
 matt black

The surfaces rose gold, bronze, phantom and black phantom may differ slightly from other product lines.

### further options

- further lighting effects view page 110
- further mounting accessories view page 108
- accessories for Occhio air from page 226

These and further options can be configured at **Occhio Digital Order System (DOS)**

### further information

- technical data, information on control and mounting options view pages 109–111

# Sento

ceiling luminaires



## soffitto singolo

## soffitto doppio

head 360° rotatable  
body 180° rotatable

**30 cm, up/flat** swivel range 120°  
**40 cm, up/flat** swivel range 120°  
**60 cm, up/flat** swivel range 120°  
**80 cm, up/flat** swivel range 90°  
☺ can be synced via Occhio air

**30 cm, up/flat** swivel range 120°  
**40 cm, up/flat** swivel range 120°  
**60 cm, up/flat** swivel range 120°  
**80 cm, up/flat** swivel range 90°  
☺ can be synced via Occhio air

### versions

| version                             | power          | chrome/colors | materials | phantom/black phantom | 30 cm  | 40 cm  | 60 cm  | 80 cm | 2 x 30 cm | 2 x 40 cm | 2 x 60 cm | 2 x 80 cm |
|-------------------------------------|----------------|---------------|-----------|-----------------------|--------|--------|--------|-------|-----------|-----------|-----------|-----------|
| <b>A</b><br>no diffuser             | 26 W (1620 lm) | 831,93        | +67,23    | +100,84               | 842,02 | 862,18 | 878,99 |       | 1.428,57  | 1.436,97  | 1.457,14  | 1.477,31  |
| <b>E</b><br>diffusor glass/lens 80° | 26 W (1750 lm) | 880,67        | +67,23    | +100,84               | 890,76 | 910,92 | 927,73 |       | 1.526,05  | 1.534,45  | 1.554,62  | 1.574,79  |
| <b>D</b><br>lens/lens 80°/80°       | 26 W (1570 lm) | 742,86        | +67,23    | +100,84               | 752,94 | 773,11 | 789,92 |       | 1.250,42  | 1.258,82  | 1.278,99  | 1.299,16  |
| <b>C</b><br>lens 80°                | 26 W (1570 lm) | 742,86        | +67,23    | +100,84               | 752,94 | 773,11 | 789,92 |       | 1.250,42  | 1.258,82  | 1.278,99  | 1.299,16  |

### control

#### features

»up/down fading« (with double-sided light output), switchable and dimmable via »touchless control« (can be deactivated) or Occhio air (optional), dimmable via trailing-edge phase cut dimmer

#### Occhio air

Bluetooth control integrated in the head, features via Occhio air app or »air« controller (optional), no external dimming

+82,35

### inserts

|                |       |
|----------------|-------|
| filter red     | 35,29 |
| filter green   |       |
| filter blue    |       |
| filter yellow  |       |
| filter magenta |       |

(max. 18 W)

|   |       |
|---|-------|
| soft edge glass (for lens)                | 28,57 |
| light cone with soft contour approx. 80°  |       |
| satinised glass (for lens)                | 18,49 |
| light cone with soft contour approx. 100° |       |

### options

#### light source

2700 K or 3000 K, perfect color LED CRI 97

#### mounting options

##### up

with integrated converter for surface mounting, through-wiring possible

##### flat

with flat base for hollow ceiling with cavity box (incl. remote converter)

### surfaces

#### head

chrome/colors  
shiny chrome  
matt chrome  
glossy white  
matt white  
matt black

#### materials

matt gold  
matt gold  
rose gold  
bronze

#### phantom/black phantom

phantom  
black phantom

#### body/base

shiny chrome  
matt chrome  
shiny chrome/glossy white  
matt white  
matt black

The surfaces rose gold, bronze, phantom and black phantom may differ slightly from other product lines.

### further options

- further lighting effects view page 110
- further mounting accessories view page 108
- accessories for Occhio air from page 226

These and further options can be configured at **Occhio Digital Order System (DOS)**

### further information

- technical data, information on control and mounting options view pages 109–111

# Sento

ceiling luminaires



soffitto due



soffitto due

head 360° rotatable  
body 180° rotatable

**30 cm, up/flat**  
swivel range 2 x 60°  
can be synced via Occhio air

**40 cm, up/flat**  
swivel range 2 x 60°

**60 cm, up/flat**  
swivel range 2 x 60°

**80 cm, up/flat**  
swivel range 2 x 45°  
can be synced via Occhio air

**100 cm, up/flat**  
swivel range 2 x 45°

**125 cm, up/flat**  
swivel range 2 x 45°

**versions**

| Version                      | Power                  | Material              | 30 cm    | 40 cm    | 60 cm    | 80 cm    | 100 cm   | 125 cm   |
|------------------------------|------------------------|-----------------------|----------|----------|----------|----------|----------|----------|
| E<br>diffusor glass/lens 80° | 2 x 26 W (2 x 1620 lm) | chrome/colors         | 1.524,37 | 1.547,90 | 1.586,55 | 1.626,89 | 1.675,63 | 1.727,73 |
|                              |                        | materials             | +134,45  |          |          | +134,45  |          |          |
|                              |                        | phantom/black phantom | +201,68  |          |          | +201,68  |          |          |
| D<br>lens/lens 80°/80°       | 2 x 26 W (2 x 1750 lm) | chrome/colors         | 1.621,85 | 1.645,38 | 1.684,03 | 1.724,37 | 1.773,11 | 1.825,21 |
|                              |                        | materials             | +134,45  |          |          | +134,45  |          |          |
|                              |                        | phantom/black phantom | +201,68  |          |          | +201,68  |          |          |
| C<br>lens 80°                | 2 x 26 W (2 x 1570 lm) | chrome/colors         | 1.346,22 | 1.369,75 | 1.408,40 | 1.448,74 | 1.497,48 | 1.549,58 |
|                              |                        | materials             | +134,45  |          |          | +134,45  |          |          |
|                              |                        | phantom/black phantom | +201,68  |          |          | +201,68  |          |          |

**control**

**features**

»up/down fading« (with double-sided light output), switchable and dimmable via »touchless control« (can be deactivated) or Occhio air (optional), dimmable via trailing-edge phase cut dimmer

**Occhio air**



Bluetooth control integrated in the head, features via Occhio air app or »air« controller (optional), no external dimming

+82,35

**inserts**

- filter red 35,29
  - filter green
  - filter blue
  - filter yellow
  - filter magenta
- (max. 18 W)

- soft edge glass (for lens) light cone with soft contour approx. 80° 28,57
- satinised glass (for lens) light cone with soft contour approx. 100° 18,49

**options**

**light source**

2700 K or 3000 K, perfect color LED CRI 97

**mounting options**

**up**

with integrated converter for surface mounting, through-wiring possible

**flat**

with flat base for hollow ceiling with cavity box (incl. remote converter)

**surfaces**

**head**

- shiny chrome
- matt chrome
- glossy white
- matt white
- matt black

**materials**

- matt gold
- matt gold
- rose gold
- bronze

**phantom/black phantom**

- phantom
- black phantom

**body/base**

- shiny chrome
- matt chrome
- shiny chrome/glossy white
- matt white
- matt black

The surfaces rose gold, bronze, phantom and black phantom may differ slightly from other product lines.

**further options**

- further lighting effects view page 110
- further mounting accessories view page 108
- accessories for Occhio air from page 226

These and further options can be configured at **Occhio Digital Order System (DOS)**

**further information**

- technical data, information on control and mounting options view pages 109–111

# Sento

ceiling luminaires



## faro

head and body  
360° rotatable

**10 cm, up/flat**      **20 cm, up/flat**      **30 cm, up/flat**

📶 can be synced via Occhio air

### versions

|  |                               |                              |         |        |        |
|--|-------------------------------|------------------------------|---------|--------|--------|
|  | <b>2 x 26 W</b> (2 x 1620 lm) | <b>chrome/colors</b>         | 739,50  | 746,22 | 754,62 |
|  |                               | <b>materials</b>             | +67,23  |        |        |
|  |                               | <b>phantom/black phantom</b> | +100,84 |        |        |

**E**  
diffusor glass/lens 80°

|  |                               |                              |         |        |        |
|--|-------------------------------|------------------------------|---------|--------|--------|
|  | <b>2 x 26 W</b> (2 x 1750 lm) | <b>chrome/colors</b>         | 788,24  | 794,96 | 803,36 |
|  |                               | <b>materials</b>             | +67,23  |        |        |
|  |                               | <b>phantom/black phantom</b> | +100,84 |        |        |

**D**  
lens/lens  
80°/80°

|  |                               |                              |         |        |        |
|--|-------------------------------|------------------------------|---------|--------|--------|
|  | <b>2 x 26 W</b> (2 x 1570 lm) | <b>chrome/colors</b>         | 650,42  | 657,14 | 665,55 |
|  |                               | <b>materials</b>             | +67,23  |        |        |
|  |                               | <b>phantom/black phantom</b> | +100,84 |        |        |

**C**  
lens  
80°

**control**      **features**

»up/down fading« (with double-sided light output), switchable and dimmable via »touchless control« (can be deactivated) or Occhio air (optional), dimmable via trailing-edge phase cut dimmer

**Occhio air**

Bluetooth control integrated in the head, features via Occhio air app or »air« controller (optional), no external dimming

+82,35

# Sento

suspended luminaires



## filo

head and body  
360° rotatable  
📶 can be synced via Occhio air

**fix, up/flat**  
cable length adjustable during mounting  
80–180 cm

**variable, up/flat**  
continuous height adjustment  
50–200 cm

|  |                       |                              |         |          |
|--|-----------------------|------------------------------|---------|----------|
|  | <b>26 W</b> (1620 lm) |                              | 873,95  | 1.159,66 |
|  |                       | <b>materials</b>             | +67,23  |          |
|  |                       | <b>phantom/black phantom</b> | +100,84 |          |

|  |                       |                              |         |          |
|--|-----------------------|------------------------------|---------|----------|
|  | <b>26 W</b> (1750 lm) |                              | 922,69  | 1.208,40 |
|  |                       | <b>materials</b>             | +67,23  |          |
|  |                       | <b>phantom/black phantom</b> | +100,84 |          |

|  |                       |                              |         |          |
|--|-----------------------|------------------------------|---------|----------|
|  | <b>26 W</b> (1570 lm) |                              | 784,87  | 1.070,59 |
|  |                       | <b>materials</b>             | +67,23  |          |
|  |                       | <b>phantom/black phantom</b> | +100,84 |          |

longer version, fix (180–280 cm) configurable (surcharge)

**inserts**

|  |                |       |
|--|----------------|-------|
|  | filter red     | 35,29 |
|  | filter green   |       |
|  | filter blue    |       |
|  | filter yellow  |       |
|  | filter magenta |       |

(max. 18 W)

|  |   |       |
|--|---|-------|
|  | soft edge glass (for lens)<br>light cone with soft contour              | 28,57 |
|  | satinised glass (for lens)<br>light cone with soft contour approx. 100° | 18,49 |

**options**      **light source**

2700 K or 3000 K, perfect color LED CRI 97

**mounting options**

**up**

with integrated converter for surface mounting, through-wiring possible

**flat**

with flat base for hollow ceiling with cavity box (incl. remote converter)

**surfaces**

**head**

|                      |                  |                              |                           |
|----------------------|------------------|------------------------------|---------------------------|
| <b>chrome/colors</b> | <b>materials</b> | <b>phantom/black phantom</b> | <b>body/base</b>          |
| shiny chrome         |                  |                              | shiny chrome              |
| matt chrome          |                  |                              | matt chrome               |
| glossy white         |                  |                              | shiny chrome/glossy white |
| matt white           | matt gold        | rose gold                    | matt white                |
| matt black           | matt gold        | bronze                       | matt black                |
|                      |                  | phantom                      |                           |
|                      |                  | black phantom                |                           |

The surfaces rose gold, bronze, phantom and black phantom may differ slightly from other product lines.

**further information**

- further lighting effects view page 110
- further mounting accessories view page 108
- accessories for Occhio air from page 226

These and further options can be configured at **Occhio Digital Order System (DOS)**

**further information**      - technical data, information on control and mounting options view pages 109–111

## Sento mounting accessories

|  |   |   |       |
|--|---|---|-------|
| <b>sideways inlet (single- or double-sided) through-wiring set</b><br>for all surface-mounted versions,<br>H 7 mm, ø 76 mm (ø base 88 mm)  |    | white   | 28,57 |
| for all up doppio/duo surface-mounted versions,<br>H 7 mm, ø 107 mm (ø base 108 mm)  |    | white   | 38,66 |
| <b>canopy with outlet on one or both sides</b><br>for all surface-mounted versions,<br>H 15 mm, ø 88 mm  |    | shiny chrome<br>glossy white<br>matt chrome<br>matt white<br>matt black | 55,46 |
| <b>cable redirection</b><br>for filo,<br>H 18 mm, ø 15 mm  |    | shiny chrome<br>matt chrome<br>matt white<br>matt black                 | 35,29 |
| <b>mirror assembly kit</b><br>for mounting the luminaires Sento verticale/parete<br>20/30 cm directly on a mirror, (drilling diameter<br>70 mm), no possibility of revision of the power<br>supply via mirrors for flat versions |  |   | 43,70 |
| <b>fixing ring</b><br>to avoid rotation of the head,<br>instead of carbon handle   |  | shiny chrome<br>matt chrome<br>matt white<br>matt black                 | 11,76 |
| <b>cavity box</b><br>for mounting of flat luminaires<br>in hollow ceilings and -walls  |  |   | 3,36  |
| <b>inserts</b><br>(color filter only for heads 18W)  | filter red<br>filter green<br>filter blue<br>filter yellow<br>filter magenta        |   | 35,29 |
| in combination with lens   | soft edge glass<br>(light cone with soft contour)                                   |   | 28,57 |
|  | satinsed glass<br>(soft widening of the light cone<br>approx. 100°)                 |   | 18,49 |

Can be configured at **Occhio Digital Order System (DOS)**


## Sento mounting options

**head** ø 123 mm, H 42 mm

**up**  
 with integrated power supply for surface mounting,  
 through-wiring possible.

Ⓢ synchronization of multiple luminaires via  
 »air« sync possible (prerequisite all luminaires  
 with »air« and same type)


 Occhio air optional

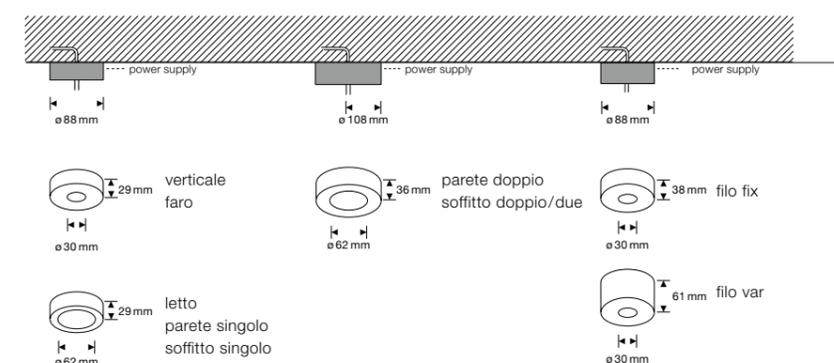

**flat**  
 with flat base for cavity box,  
 remote power supply

Ⓢ synchronization of multiple luminaires via  
 »air« sync possible (prerequisite all luminaires  
 with »air« and same type)

 Occhio air optional

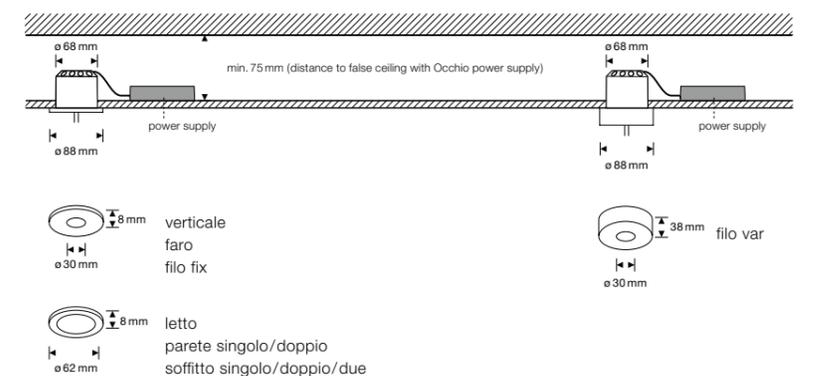

## Sento lighting effects (can be configured)

| head   | + soft edge glass   | + satinised glass   |
|--|---|---|
| <b>head with double-sided light output</b><br>incl. »touchless control«<br>(can be deactivated)<br>with optional »air« control   | <b>A</b><br>diffusor glass/diffusor glass<br>diffus/diffus                              |   |
|  | <b>D</b><br>lens/lens<br>80°/80°  | <b>D</b><br>lens/lens<br>+ 2 x satinised glass<br>80°/80°           |
|  | <b>E</b><br>diffusor glass/lens<br>diffuse/80°  | <b>E</b><br>diffusor glass/lens<br>+ soft edge glass<br>diffuse/80° |
|  |   | <b>D</b><br>lens/lens<br>+ 2 x satinised glass<br>100°/100°         |
|  |   | <b>E</b><br>diffusor glass/lens<br>+ satinised glass<br>diffus/100  |
| <b>head with single-sided light output</b><br>with »touchless control«<br>(can be deactivated)<br>or with optional »air« control | <b>B</b><br>diffusor glass<br>diffus  |   |
|  | <b>C</b><br>lens<br>80°   | <b>C</b><br>lens + soft edge glass<br>80°                           |
|  |   | <b>C</b><br>lens + satinised glass<br>100°                          |
|  | <b>S 40</b><br>double lens + soft edge glass<br>40° (not combinable with other inserts) |   |
|  | <b>S 30</b><br>double lens + Fresnel-lens<br>30° (not combinable with other inserts)    |   |

## Sento technical data and control

version »touchless control«

|                                |     |            |
|--------------------------------|-----|------------|
| <b>connection</b>              | U   | 230 V AC   |
| <b>average service life</b>    | t   | > 50.000 h |
| <b>energy efficiency class</b> | EEK | G          |

|                              |     |                        |
|------------------------------|-----|------------------------|
| <b>LED</b>                   |     | <b>perfect color</b>   |
| <b>color temperature</b>     | T   | 2700 K, 3000 K         |
| <b>Color Rendering Index</b> | CRI | Ra 97                  |
| <b>recommended use</b>       |     | residential and public |

|                                | P | perfect color |         |
|--------------------------------|---|---------------|---------|
| power                          |   | 18 W          | 26 W    |
| <b>luminous flux luminaire</b> | φ |               |         |
| lighting effects A             |   | 1090 lm       | 1500 lm |
| lighting effects B             |   | 1000 lm       | 1370 lm |
| lighting effects C             |   | 1140 lm       | 1570 lm |
| lighting effects D             |   | 1270 lm       | 1750 lm |
| lighting effects E             |   | 1170 lm       | 1620 lm |
| lighting effects S 40          |   | 1130 lm       | 1560 lm |
| lighting effects S 30          |   | 1110 lm       | 1530 lm |

control

with Occhio power supply

The Occhio converter is perfectly matched to these requirements and can be dimmed by trailing-edge phase cut dimmer\*. Can not be used in conjunction with »touchless control« or Occhio air.


**table/floor luminaires (Sento tavolo, Sento lettura, Sento terra)**

Sento tavolo and lettura come with a plug-in power supply (max. 18 W, tavolo, lettura). Sento terra comes with a controller and touch surfaces (max. 2 x 26 W). The luminaires can be switched or dimmed on the luminaire head additionally via the controller and foot switch (only terra).

Occhio air  
powered by  
Casambi

 **Occhio air**  
control via Bluetooth – switching, dimming, »up/down fading«  
of individual luminaires, groups and scenes.

**touchless dimm function**  
Sento luminaire heads



18 W/26 W  
light power is adjustable to 18 W or 26 W,  
18 W recommended for arm's area,  
26 W not recommended for arm's reach (heat development).\*\*

**SENSOR OFF**  
luminaires are dimmed using remote trailing-edge phase cut dimmers\* (except floor and table luminaires) or controlled with Occhio air (optional) (switching, dimming, »up/down fading«).

**SENSOR DIM**  
luminaires can be controlled touchlessly »touchless control« via simple gestures control function integrated in the head or by Occhio air (optional) (switching, dimming, »up/down fading«).

**SENSOR STEP**  
this setting enables the up/down ratio and brightness to be preconfigured and saved. Additionally dimmable via trailing-edge phase cut dimmer\*.


\*compatible dimmers: [occhio.com/dim](http://occhio.com/dim)

\*\*Sento tavolo, Sento lettura only with 18 W

L series

# Sento sospeso

Completed in design, with sophisticated operating functions and an incomparable height adjustment: is the essence of highest quality of light.

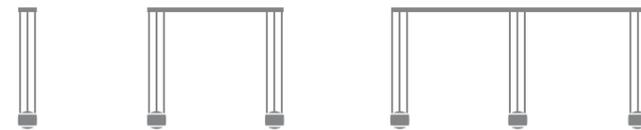

# Sento sospeso

## suspended luminaires



flat

pure

up

|  |  |                 |   |                 |  |                 |
|--|--|-----------------|---|-----------------|--|-----------------|
| <b>fix</b><br>fix cable length adjustable during mounting<br>max. 350 cm | <b>fix</b><br>for hollow ceiling<br>incl. remote converter | <b>variable</b> | <b>fix</b><br>for flush ceiling-mounted<br>installation (mounting board)<br>incl. converter | <b>variable</b> | <b>fix</b><br>for surface-mounted<br>installation through-wiring<br>possible | <b>variable</b> |
| <b>variable</b><br>continuous height adjustment<br>50–200 cm             | Ⓢ can be synced via Occhio air                             |                 | Ⓢ can be synced via Occhio air  |                 | Ⓢ can be synced via Occhio air   |                 |

| versions |                       |                                   |          |          |          |          |                       |          |          |
|----------|-----------------------|-----------------------------------|----------|----------|----------|----------|-----------------------|----------|----------|
|          | <b>32 W</b> (1940 lm) | <b>chrome/colors</b>              | 1.183,19 | 1.537,82 | 1.302,52 | 1.657,14 | <b>32 W</b> (1940 lm) | 1.191,60 | 1.546,22 |
|          | 26 W (1580 lm)        | <b>materials</b>                  | +134,45  |          | +117,65  |          | 26 W (1580 lm)        | +134,45  |          |
|          | <b>26 W</b> (1580 lm) | <b>phantom/<br/>black phantom</b> | +201,68  |          | +176,47  |          | <b>26 W</b> (1580 lm) | +201,68  |          |
|          | <b>32 W</b> (2070 lm) | <b>chrome/colors</b>              | 1.260,50 | 1.615,13 | 1.379,83 | 1.734,45 | <b>32 W</b> (2070 lm) | 1.268,91 | 1.623,53 |
|          | 26 W (1690 lm)        | <b>materials</b>                  | +134,45  |          | +117,65  |          | 26 W (1690 lm)        | +134,45  |          |
|          | <b>26 W</b> (1690 lm) | <b>phantom/<br/>black phantom</b> | +201,68  |          | +176,47  |          | <b>26 W</b> (1690 lm) | +201,68  |          |

**E**  
uplight diffuser glass/  
downlight lens 80° + soft edge glass

**D**  
up-/downlight  
lens 80° + soft edge glass

Ⓢ special length up to 1000 cm possible (extra charge per head: +142,86, non discountable)

|                |  |  |
|----------------|--|--|
| <b>control</b> | <b>features</b>  | <b>Occhio air</b>  |
|                | »up/down fading«, switching, dimming via »touchless control« (can be deactivated) and Occhio air (optional), alternatively dimmable via trailing-edge phase cut dimmer | Bluetooth control integrated in luminaire heads, features via Occhio air app or »air« controller (optional) controllable, no external dimming possible<br>+82,35 |

|                |  |                 |                                       |   |   |
|----------------|--|-----------------|---------------------------------------|---|---|
| <b>options</b> | <b>light source</b>                        | <b>surfaces</b> | <b>head/base*</b>                     | <b>colors</b>   | <b>materials/phantom</b>                        |
|                | 2700 K or 3000 K, perfect color LED CRI 97 |                 | chrome<br>shiny chrome<br>matt chrome | glossy white<br>matt white<br>matt black<br>matt gold | rose gold<br>bronze<br>phantom<br>black phantom |

\*for pure: base always matt white  
The surfaces rose gold, bronze, phantom and black phantom may differ slightly from other product lines.

|                        |  |   |                            |  |
|------------------------|--|---|----------------------------|--|
| <b>further options</b> | - further mounting accessories view page 118<br>- accessories for Occhio air from page 226 | These and further options can be configured at <b>Occhio Digital Order System (DOS)</b> | <b>further information</b> | - technical data, information on control and mounting options view pages 119–120 |
|------------------------|--|---|----------------------------|--|

# Sento sospeso

## suspended luminaires



due



tre

**fix**  
fix cable length adjustable during mounting  
max. 350 cm

**variable**  
variable continuous height adjustment  
50–200 cm

**fix**  
for surface-mounted  
installation through-wiring  
possible

**variable**

Ⓢ the luminaire heads are synced via an internal control wire

**fix**  
for surface-mounted  
installation through-wiring  
possible

**variable**

Ⓢ the luminaire heads are synced via an internal control wire

### versions



**2 x 32 W** (2 x 1940 lm) **chrome/colors** 3.186,55 3.895,80  
2 x 26 W (2 x 1580 lm) shiny chrome

**2 x 26 W** (2 x 1580 lm) **materials** +235,29

**2 x 26 W** (2 x 1580 lm) **phantom/  
black phantom** +352,94

**3 x 32 W** (3 x 1940 lm) 4.836,97 5.900,84  
3 x 26 W (3 x 1580 lm)

**3 x 26 W** (3 x 1580 lm) +352,94

**3 x 26 W** (3 x 1580 lm) +529,41

### E

uplight diffusor glass/  
downlight lens 80° + soft edge glass



**2 x 32 W** (2 x 2070 lm) **chrome/colors** 3.341,18 4.050,42  
2 x 26 W (2 x 1690 lm) shiny chrome

**2 x 26 W** (2 x 1690 lm) **materials** +235,29

**2 x 26 W** (2 x 1690 lm) **phantom/  
black phantom** +352,94

**3 x 32 W** (3 x 2070 lm) 5.068,91 6.132,77  
3 x 26 W (3 x 1690 lm)

**3 x 26 W** (3 x 1690 lm) +352,94

**3 x 26 W** (3 x 1690 lm) +529,41

### D

up-/downlight  
lens 80° + soft edge glass

Ⓢ special length up to 1000 cm possible (extra charge per head: +142,86, non discountable)

### control

#### features

»up/down fading«, switching, dimming via  
»touchless control« (deactivatable) and  
Occhio air (optional), alternatively dimmable  
via trailing-edge phase cut dimmer

#### Occhio air



Bluetooth control integrated in luminaire heads,  
features via Occhio air app or »air« controller (optional)  
controllable, no external dimming possible

+ 82,35

### options

#### light source

2700 K or 3000 K, perfect color LED CRI 97

#### surfaces

#### head/canopy chrome

shiny chrome/matt white  
matt chrome/matt white

#### colors

glossy white/matt white  
matt white/matt white  
matt black/matt white  
matt gold/matt white

#### materials/phantom

rose gold/matt white  
bronze/matt white  
phantom/matt white  
black phantom/matt white

The surfaces rose gold, bronze, phantom and black phantom may differ slightly from other product lines.

### further options

- further mounting accessories view page 118  
- accessories for Occhio air from page 226


These and further options can be configured at  
**Occhio Digital Order System (DOS)**

### further information

- technical data, information on control and mounting options view pages 119–120

## Sento sospeso mounting accessories

**sideways inlet (single- or double-sided) through-wiring set**  
for all surface-mounted versions (except due/tre),  
H 7 mm, ø 107 mm (ø base 108 mm)



matt white

38,66

**canopy with outlet on one or both sides**  
for all surface-mounted versions,  
H 15 mm, ø 88 mm



shiny chrome  
glossy white  
matt chrome  
matt white  
matt black

55,46

**cavity box**  
for mounting of flat luminaires  
in hollow ceilings and -walls



3,36

## Sento sospeso mounting options

**head:** ø 123 mm, H 72 mm

**up**  
with integrated power supply for surface mounting,  
through-wiring possible.

Ⓢ synchronization of multiple luminaires via  
»air« sync possible (prerequisite all luminaires  
with »air« and same type)



Occhio air optional

**flat**  
with flat base for cavity box,  
remote power supply,  
installation depth: min. 30 mm, (min. 80 mm if the power  
supply is installed through the luminaire's ceiling opening)

Ⓢ synchronization of multiple luminaires via  
»air« sync possible (prerequisite all luminaires  
with »air« and same type)



Occhio air optional

**due/tre**  
ceiling canopy with integrated power supply for  
surface mounting, through-wiring possible

dimensions of ceiling canopy  
due: L 1020 x W 120 x H 40 mm  
tre: L 1920 x W 120 x H 40 mm  
**distance between bodies: 90 cm**

Ⓢ the luminaire heads are synced via  
an internal control line




Occhio air optional

**pure**  
with plastering element for flush ceiling-mounted  
installation, remote power supply (optional),  
installation depth: min. 30 mm, (min. 80 mm when  
mounting power supply through luminaire opening)

Ⓢ synchronization of multiple luminaires via  
»air« sync possible (prerequisite all luminaires  
with »air« and same type)



Occhio air optional

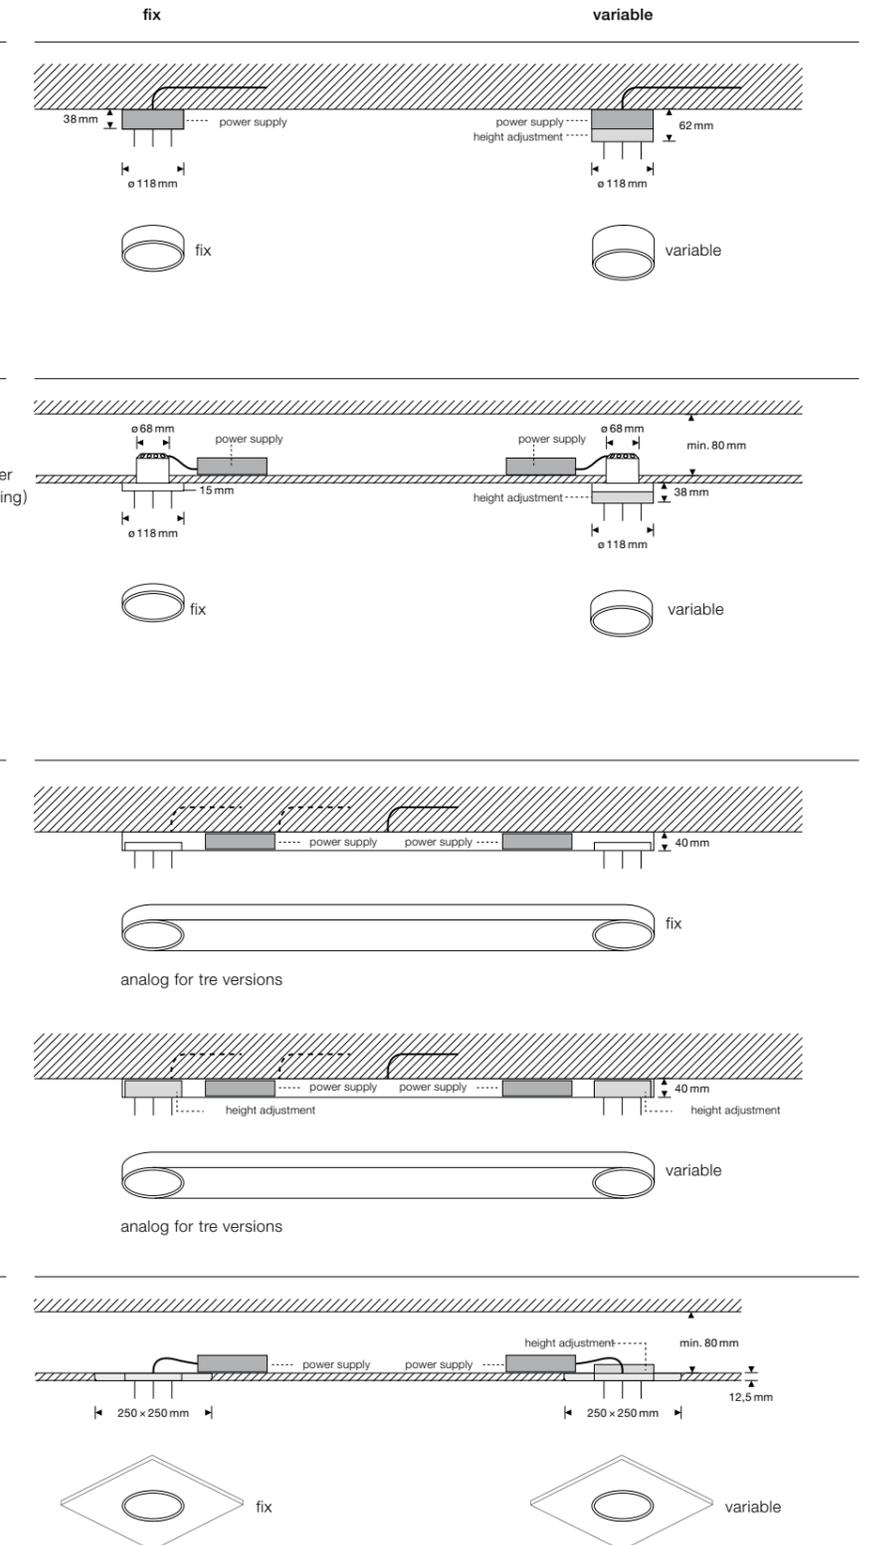

# Sento sospeso technical data and control

## version »touchless control«

|                         |     |            |
|-------------------------|-----|------------|
| connection              | U   | 230 V AC   |
| average service life    | t   | > 50.000 h |
| energy efficiency class | EEK | G          |

|                       |     |                        |
|-----------------------|-----|------------------------|
| <b>LED</b>            |     | <b>perfect color</b>   |
| color temperature     | T   | 2700 K, 3000 K         |
| Color Rendering Index | CRI | Ra 97                  |
| recommended use       |     | residential and public |

|                                |   |                      |             |
|--------------------------------|---|----------------------|-------------|
| <b>power</b>                   | P | <b>perfect color</b> |             |
| <b>luminous flux luminaire</b> | φ | <b>26 W</b>          | <b>32 W</b> |
| lighting effects E             |   | 1580 lm              | 1940 lm     |
| lighting effects D             |   | 1690 lm              | 2070 lm     |

## control

### with Occhio power supply

The Occhio converter is perfectly matched to these requirements and can be dimmed by trailing-edge phase cut dimmer\*. Can not be used in conjunction with »touchless control« or Occhio air.

Occhio air  
powered by  
Casambi

 **Occhio air**  
control via Bluetooth – switching, dimming, »up/down fading«  
of individual luminaires, groups and scenes.

## touchless dim funktion Sento sospeso luminaire heads



### SENSOR OFF

Luminaires can be dimmed via remote trailing-edge phase cut dimmers\* or controlled via Occhio air (optional) (switching, dimming, »up/down fading«).

### SENSOR DIM

Luminaires can be controlled via »touchless control« with simple gestures control function integrated in the head or via Occhio air (optional) (switching, dimming, »up/down fading«).

### SENSOR STEP

This setting enables the up/down ratio and brightness to be preconfigured and saved. Additionally dimmable via trailing-edge phase cut dimmer\*.

\*compatible dimmers: [occhio.com/dim](http://occhio.com/dim)

L series

# Più

The power of innovation – the modular spotlight system for holistic lighting design.



# Più

## ceiling spotlights



alto



alto v



R alto



R alto v

360° rotatable  
for surface-mounted installation

swivel range 52°

non-swiveling

swivel range 52°

non-swiveling

### versions



max. 26 W (1290 lm)

chrome/colors

563,03

394,96

materials

+67,23

phantom/black phantom

+100,84

**C 80**  
80°/lens



max. 26 W (1030 lm)

chrome/colors

579,83

411,76

materials

+67,23

phantom/black phantom

+100,84

**S 100**  
100°/lens  
+ satinised glass



max. 26 W (1140 lm)

chrome/colors

579,83

411,76

materials

+67,23

phantom/black phantom

+100,84

**S 80**  
80°/lens  
+ soft edge glass



max. 26 W (1280 lm)

chrome/colors

596,64

428,57

materials

+67,23

phantom/black phantom

+100,84

**S 40**  
40°/lens  
+ soft edge glass + small lens medium

### versions



max. 26 W (1400 lm)

chrome/colors

556,30

388,24

materials

+67,23

phantom/black phantom

+100,84

**C 80**  
80°/cone glass  
+ small lens medium



max. 26 W (1210 lm)

chrome/colors

573,11

405,04

materials

+67,23

phantom/black phantom

+100,84

**S 100**  
100°/cone glass  
+ soft edge glass + small lens flat



max. 26 W (1250 lm)

chrome/colors

573,11

405,04

materials

+67,23

phantom/black phantom

+100,84

**S 80**  
80°/cone glass  
+ soft edge glass + small lens medium



max. 26 W (1220 lm)

chrome/colors

581,51

413,45

materials

+67,23

phantom/black phantom

+100,84

**S 40**  
40°/cone glass  
+ Fresnel lens + small lens medium

### control

#### features



**230V light engine 26 W**  
(switchable 13/18/26 W)  
dimmable via trailing-edge  
phase cut dimmer

#### Occhio air module



Bluetooth dimming module for  
mounting in hollow ceiling or switch  
box (can be put in doppio base),  
for max. 4 spotlights

82,35

#### Occhio air adapter



adapter ring incl. »air« module,  
mounting under luminaire  
(not for doppio),  
matt black or matt white

110,92

### inserts

- filter red
- filter green
- filter blue
- filter yellow
- filter magenta

33,61

(max. 18 W)

### options

#### light source

2700 K or 3000 K, perfect color CRI97

### surfaces

#### head/base

chrome

shiny chrome  
glossy white/shiny chrome  
matt chrome



#### colors

matt white  
matt black  
matt gold/matt white  
matt gold/matt black



#### materials/phantom/black phantom

rose gold/matt black  
bronze/matt black  
phantom/matt black  
black phantom/matt black



The surfaces rose gold, bronze, phantom and black phantom may differ slightly from other product lines.

### further options

- further lighting effects view page 148
- further mounting accessories view page 140
- further accessories for Occhio air from page 226

These and further options can be configured at  
**Occhio Digital Order System (DOS)**

### further information

- technical data and information on mounting options view pages 142–149

Più  
ceiling spotlights



alto doppio



R alto doppio

swivel range 52°  
360° rotatable  
for surface-mounted installation

versions

|   |                              |          |
|---|------------------------------|----------|
|  <b>2 x 26 W</b> (1290 lm) | <b>chrome/colors</b>         | 1.121,01 |
|   | <b>materials</b>             | + 134,45 |
|   | <b>phantom/black phantom</b> | +201,68  |

**C 80**  
80°/lens

|   |                              |          |
|---|------------------------------|----------|
|  <b>2 x 26 W</b> (1030 lm) | <b>chrome/colors</b>         | 1.154,62 |
|   | <b>materials</b>             | + 134,45 |
|   | <b>phantom/black phantom</b> | +201,68  |

**S 100**  
100°/lens  
+ satinised glass

|   |                              |          |
|---|------------------------------|----------|
|  <b>2 x 26 W</b> (1140 lm) | <b>chrome/colors</b>         | 1.154,62 |
|   | <b>materials</b>             | + 134,45 |
|   | <b>phantom/black phantom</b> | +201,68  |

**S 80**  
80°/lens  
+ soft edge glass

|   |                              |          |
|---|------------------------------|----------|
|  <b>2 x 26 W</b> (1280 lm) | <b>chrome/colors</b>         | 1.188,24 |
|   | <b>materials</b>             | + 134,45 |
|   | <b>phantom/black phantom</b> | +201,68  |

**S 40**  
40°/lens  
+ soft edge glass + small lens medium

versions

|   |                              |          |
|---|------------------------------|----------|
|  <b>2 x 26 W</b> (1400 lm) | <b>chrome/colors</b>         | 1.107,56 |
|   | <b>materials</b>             | + 134,45 |
|   | <b>phantom/black phantom</b> | +201,68  |

**C 80**  
80°/cone glass  
+ small lens medium

|   |                              |          |
|---|------------------------------|----------|
|  <b>2 x 26 W</b> (1210 lm) | <b>chrome/colors</b>         | 1.141,18 |
|   | <b>materials</b>             | + 134,45 |
|   | <b>phantom/black phantom</b> | +201,68  |

**S 100**  
100°/cone glass  
+ soft edge glass + small lens flat

|   |                              |          |
|---|------------------------------|----------|
|  <b>2 x 26 W</b> (1250 lm) | <b>chrome/colors</b>         | 1.141,18 |
|   | <b>materials</b>             | + 134,45 |
|   | <b>phantom/black phantom</b> | +201,68  |

**S 80**  
80°/cone glass  
+ soft edge glass + small lens medium

|   |                              |          |
|---|------------------------------|----------|
|  <b>2 x 26 W</b> (1220 lm) | <b>chrome/colors</b>         | 1.157,98 |
|   | <b>materials</b>             | + 134,45 |
|   | <b>phantom/black phantom</b> | +201,68  |

**S 40**  
40°/cone glass  
+ Fresnel lens + small lens medium

control

features

 **230V light engine 26 W**  
(switchable 13/18/26 W)  
dimmable via trailing-edge  
phase cut dimmer

**Occhio air module** 

Bluetooth dimming module for  
mounting in hollow ceiling or switch  
box (can be put in doppio base),  
for max. 4 spotlights

82,35

inserts

|   |                |       |
|---|----------------|-------|
|  | filter red     | 33,61 |
|  | filter green   |       |
|  | filter blue    |       |
|  | filter yellow  |       |
|  | filter magenta |       |
| (max. 18 W)   |                |       |

options

light source

2700 K or 3000 K, perfect color CRI97

surfaces

**head/base**  
chrome

shiny chrome/matt white  
matt chrome/matt white  
glossy white/shiny chrome/  
matt white



colors

matt white  
matt black  
matt gold/matt white  
matt gold/matt black



materials/phantom/black phantom

rose gold/matt black  
bronze/matt black  
phantom/matt black  
black phantom/matt black



The surfaces rose gold, bronze, phantom and black phantom may differ slightly from other product lines.

further options

- further lighting effects view page 148
- further mounting accessories view page 140
- further accessories for Occhio air from page 226

These and further options can be configured at  
**Occhio Digital Order System (DOS)**

further information

- technical data and information on mounting options view pages 142-149

# Più

## ceiling spotlights



alto 3d



alto 3d doppio



R alto 3d



R alto 3d doppio

swivel range 90°  
360° rotatable  
for surface-mounted installation  
through-wiring possible

### versions\*

|   |                            |                              |         |          |
|---|----------------------------|------------------------------|---------|----------|
|  | <b>max. 26 W</b> (1290 lm) | <b>chrome/colors</b>         | 616,81  | 1.228,57 |
|   |                            | <b>materials</b>             | +67,23  | +134,45  |
|   |                            | <b>phantom/black phantom</b> | +100,84 | +201,68  |

**C 80**  
80°/lens

|   |                            |                              |         |          |
|---|----------------------------|------------------------------|---------|----------|
|  | <b>max. 26 W</b> (1030 lm) | <b>chrome/colors</b>         | 633,61  | 1.262,18 |
|   |                            | <b>materials</b>             | +67,23  | +134,45  |
|   |                            | <b>phantom/black phantom</b> | +100,84 | +201,68  |

**S 100**  
100°/lens  
+ satinised glass

|   |                            |                              |         |          |
|---|----------------------------|------------------------------|---------|----------|
|  | <b>max. 26 W</b> (1140 lm) | <b>chrome/colors</b>         | 633,61  | 1.262,18 |
|   |                            | <b>materials</b>             | +67,23  | +134,45  |
|   |                            | <b>phantom/black phantom</b> | +100,84 | +201,68  |

**S 80**  
80°/lens  
+ soft edge glass

|   |                            |                              |         |          |
|---|----------------------------|------------------------------|---------|----------|
|  | <b>max. 26 W</b> (1280 lm) | <b>chrome/colors</b>         | 650,42  | 1.295,80 |
|   |                            | <b>materials</b>             | +67,23  | +134,45  |
|   |                            | <b>phantom/black phantom</b> | +100,84 | +201,68  |

**S 40**  
40°/lens  
+ soft edge glass + small lens medium

\*versions doppio: 2 × 26 W

### versions\*

|   |                            |                              |         |          |
|---|----------------------------|------------------------------|---------|----------|
|  | <b>max. 26 W</b> (1400 lm) | <b>chrome/colors</b>         | 610,08  | 1.215,13 |
|   |                            | <b>materials</b>             | +67,23  | +134,45  |
|   |                            | <b>phantom/black phantom</b> | +100,84 | +201,68  |

**C 80**  
80°/cone glass  
+ small lens medium

|   |                            |                              |         |          |
|---|----------------------------|------------------------------|---------|----------|
|  | <b>max. 26 W</b> (1210 lm) | <b>chrome/colors</b>         | 626,89  | 1.248,74 |
|   |                            | <b>materials</b>             | +67,23  | +134,45  |
|   |                            | <b>phantom/black phantom</b> | +100,84 | +201,68  |

**S 100**  
100°/cone glass  
+ soft edge glass + small lens flat

|   |                            |                              |         |          |
|---|----------------------------|------------------------------|---------|----------|
|  | <b>max. 26 W</b> (1250 lm) | <b>chrome/colors</b>         | 626,89  | 1.248,74 |
|   |                            | <b>materials</b>             | +67,23  | +134,45  |
|   |                            | <b>phantom/black phantom</b> | +100,84 | +201,68  |

**S 80**  
80°/cone glass  
+ soft edge glass + small lens medium

|   |                            |                              |         |          |
|---|----------------------------|------------------------------|---------|----------|
|  | <b>max. 26 W</b> (1220 lm) | <b>chrome/colors</b>         | 635,29  | 1.265,55 |
|   |                            | <b>materials</b>             | +67,23  | +134,45  |
|   |                            | <b>phantom/black phantom</b> | +100,84 | +201,68  |

**S 40**  
40°/cone glass  
+ Fresnel lens + small lens medium

\*versions doppio: 2 × 26 W

### control

#### features

 **230V light engine 26 W**  
(switchable 13/18/26 W)  
dimmable via trailing-edge  
phase cut dimmer

#### Occhio air module

Bluetooth dimming module for  
mounting in hollow ceiling or switch  
box (can be put in doppio base),  
for max. 4 spotlights

82,35

#### Occhio air adapter

adapter ring incl. »air« module,  
mounting under luminaire  
(not for doppio),  
matt black or matt white

110,92

### inserts

|   |                |       |
|---|----------------|-------|
|  | filter red     | 33,61 |
|  | filter green   |       |
|  | filter blue    |       |
|  | filter yellow  |       |
|  | filter magenta |       |
| (max. 18 W)   |                |       |

### options

#### light source

2700 K or 3000 K, perfect color CRI97

### surfaces

#### head/body/base

##### chrome

shiny chrome\*  
matt chrome\*  
glossy white/shiny chrome/  
glossy white\*



##### colors

matt white  
matt black  
matt gold/matt white  
matt gold/matt black



##### materials/phantom/black phantom

rose gold/matt black  
bronze/matt black  
phantom/matt black  
black phantom/matt black



\*for doppio: base matt white

The surfaces rose gold, bronze, phantom and black phantom may differ slightly from other product lines.

### further options

- further lighting effects view page 148
- further mounting accessories view page 140
- further accessories for Occhio air from page 226

These and further options can be configured at  
**Occhio Digital Order System (DOS)**

### further information

- technical data and information on mounting options view pages 142-149

# Più

## track spotlights



alto track



alto 3d track



R alto track



R alto 3d track

360° rotatable  
with in-trac adapter, for Eutrac, Erco  
and Zumtobel 3-phase tracks

swivel range 52°

swivel range 90°

swivel range 52°

swivel range 90°

### versions



max. 26 W (1290 lm)

|                       |         |
|-----------------------|---------|
| chrome/colors         | 522,69  |
| materials             | +67,23  |
| phantom/black phantom | +100,84 |

**C 80**  
80°/lens



max. 26 W (1030 lm)

|                       |         |
|-----------------------|---------|
| chrome/colors         | 539,50  |
| materials             | +67,23  |
| phantom/black phantom | +100,84 |

**S 100**  
100°/lens  
+ satinised glass



max. 26 W (1140 lm)

|                       |         |
|-----------------------|---------|
| chrome/colors         | 539,50  |
| materials             | +67,23  |
| phantom/black phantom | +100,84 |

**S 80**  
80°/lens  
+ soft edge glass



max. 26 W (1280 lm)

|                       |         |
|-----------------------|---------|
| chrome/colors         | 556,30  |
| materials             | +67,23  |
| phantom/black phantom | +100,84 |

**S 40**  
40°/lens  
+ soft edge glass + small lens medium

### versions



max. 26 W (1400 lm)

|                       |         |
|-----------------------|---------|
| chrome/colors         | 515,97  |
| materials             | +67,23  |
| phantom/black phantom | +100,84 |

**C 80**  
80°/cone glass  
+ small lens medium



max. 26 W (1210 lm)

|                       |         |
|-----------------------|---------|
| chrome/colors         | 532,77  |
| materials             | +67,23  |
| phantom/black phantom | +100,84 |

**S 100**  
100°/cone glass  
+ soft edge glass + small lens flat



max. 26 W (1250 lm)

|                       |         |
|-----------------------|---------|
| chrome/colors         | 532,77  |
| materials             | +67,23  |
| phantom/black phantom | +100,84 |

**S 80**  
80°/cone glass  
+ soft edge glass + small lens medium



max. 26 W (1220 lm)

|                       |         |
|-----------------------|---------|
| chrome/colors         | 541,18  |
| materials             | +67,23  |
| phantom/black phantom | +100,84 |

**S 40**  
40°/cone glass  
+ Fresnel lens + small lens medium

### control

#### features



**230V light engine 26 W**  
(switchable 13/18/26 W)  
dimmable via trailing-edge  
phase cut dimmer

### inserts

|             |                |       |
|-------------|----------------|-------|
|             | filter red     | 33,61 |
|             | filter green   |       |
|             | filter blue    |       |
|             | filter yellow  |       |
|             | filter magenta |       |
| (max. 18 W) |                |       |

### options

#### light source

2700 K or 3000 K, perfect color CRI97

### surfaces

#### head/body\* + adapter

chrome

shiny chrome/matt white  
matt chrome  
glossy white/shiny chrome/  
matt white



#### colors

matt white  
matt black  
matt gold/matt white  
matt gold/matt black



#### materials/phantom/black phantom

rose gold/matt black  
bronze/matt black  
phantom/matt black  
black phantom/matt black



\*body only for alto 3d

The surfaces rose gold, bronze, phantom and black phantom may differ slightly from other product lines.

### further options

- further lighting effects view page 148  
- accessories for Occhio air from page 226

These and further options can be configured at  
**Occhio Digital Order System (DOS)**

### further information

- technical data and information on mounting options view pages 142-149

# Più spotlights

## recessed spotlights



piano edge    piano cover round    piano cover square



R piano edge    R piano cover round    R piano cover square

360° rotatable, swivel range 30°

for recessed mounting with filigree ceiling edge

for recessed mounting installation with cover square

for recessed mounting with filigree ceiling edge

for recessed mounting installation with cover round

for recessed mounting installation with cover square

### versions

|  |                            |                       |         |         |        |
|--|----------------------------|-----------------------|---------|---------|--------|
|  | <b>max. 26 W</b> (1400 lm) | chrome/colors         | 352,94  | 452,10  | 452,10 |
|  |                            | materials             | +67,23  | +84,03  |        |
|  |                            | phantom/black phantom | +100,84 | +126,05 |        |

**C 80**  
80°/lens

### versions

|  |                            |                       |         |         |        |
|--|----------------------------|-----------------------|---------|---------|--------|
|  | <b>max. 26 W</b> (1400 lm) | chrome/colors         | 346,22  | 445,38  | 445,38 |
|  |                            | materials             | +67,23  | +84,03  |        |
|  |                            | phantom/black phantom | +100,84 | +126,05 |        |

**C 80**  
80°/cone glass  
+ small lens medium

|  |                            |                       |         |         |        |
|--|----------------------------|-----------------------|---------|---------|--------|
|  | <b>max. 26 W</b> (1030 lm) | chrome/colors         | 369,75  | 468,91  | 468,91 |
|  |                            | materials             | +67,23  | +84,03  |        |
|  |                            | phantom/black phantom | +100,84 | +126,05 |        |

**S 100**  
100°/lens  
+ satinised glass

|  |                            |                       |         |         |        |
|--|----------------------------|-----------------------|---------|---------|--------|
|  | <b>max. 26 W</b> (1210 lm) | chrome/colors         | 363,03  | 462,18  | 462,18 |
|  |                            | materials             | +67,23  | +84,03  |        |
|  |                            | phantom/black phantom | +100,84 | +126,05 |        |

**S 100**  
100°/lens  
+ satinised glass

|  |                            |                       |         |         |        |
|--|----------------------------|-----------------------|---------|---------|--------|
|  | <b>max. 26 W</b> (1140 lm) | chrome/colors         | 369,75  | 468,91  | 468,91 |
|  |                            | materials             | +67,23  | +84,03  |        |
|  |                            | phantom/black phantom | +100,84 | +126,05 |        |

**S 80**  
80°/lens  
+ soft edge glass

|  |                            |                       |         |         |        |
|--|----------------------------|-----------------------|---------|---------|--------|
|  | <b>max. 26 W</b> (1250 lm) | chrome/colors         | 363,03  | 462,18  | 462,18 |
|  |                            | materials             | +67,23  | +84,03  |        |
|  |                            | phantom/black phantom | +100,84 | +126,05 |        |

**S 80**  
80°/lens  
+ soft edge glass

|  |                            |                       |         |         |        |
|--|----------------------------|-----------------------|---------|---------|--------|
|  | <b>max. 26 W</b> (1280 lm) | chrome/colors         | 386,55  | 485,71  | 485,71 |
|  |                            | materials             | +67,23  | +84,03  |        |
|  |                            | phantom/black phantom | +100,84 | +126,05 |        |

**S 40**  
40°/lens  
+ soft edge glass + small lens medium

|  |                            |                       |         |         |        |
|--|----------------------------|-----------------------|---------|---------|--------|
|  | <b>max. 26 W</b> (1220 lm) | chrome/colors         | 371,43  | 470,59  | 470,59 |
|  |                            | materials             | +67,23  | +84,03  |        |
|  |                            | phantom/black phantom | +100,84 | +126,05 |        |

**S 40**  
40°/lens  
+ soft edge glass + small lens medium

can also be configured as pro version  
excl. power supply at Digital Order System (DOS)

can also be configured as pro version  
excl. power supply at Digital Order System (DOS)

### control

#### features

**230V light engine 26 W**  
(switchable 13/18/26 W)  
dimmable via trailing-edge  
phase cut dimmer

#### Occhio air module

Bluetooth dimming module for mounting in hollow ceiling or switch box for max. 4 spotlights

82,35

### inserts

|             |                |       |
|-------------|----------------|-------|
|             | filter red     | 33,61 |
|             | filter green   |       |
|             | filter blue    |       |
|             | filter yellow  |       |
|             | filter magenta |       |
| (max. 18 W) |                |       |

### options

#### light source

2700 K or 3000 K, perfect color CRI97  
pro version also available in 4000 K, perfect color CRI97

### surfaces

#### head\*/cover

chrome  
shiny chrome   
matt chrome

colors  
matt white   
matt black   
matt gold

materials/phantom/black phantom  
rose gold   
bronze   
phantom   
black phantom

#### tube/edging

matt white   
matt black

\*no cover for edge version, ceiling edge always in color of the tube  
The surfaces rose gold, bronze, phantom and black phantom may differ slightly from other product lines.

### further options

- further lighting effects view page 148  
- accessories for Occhio air from page 226

These and further options can be configured at  
**Occhio Digital Order System (DOS)**

### further information

- technical data and information on mounting options view pages 142-149

# Più spotlights

## recessed spotlights



piano in edge    piano in cover round    piano in cover square



R piano in edge    R piano in cover round    R piano in cover square

360° rotatable, swivel range 20°

for recessed mounting with filigree ceiling edge

for recessed mounting installation with cover round

for recessed mounting installation with cover square

for recessed mounting with filigree ceiling edge

for recessed mounting installation with cover round

for recessed mounting installation with cover square

### versions



max. 26 W (1640 lm)

|                       |         |         |        |
|-----------------------|---------|---------|--------|
| chrome/colors         | 389,92  | 489,08  | 489,08 |
| materials             | +67,23  | +84,03  |        |
| phantom/black phantom | +100,84 | +126,05 |        |

C 80  
80°/lens

### versions



max. 26 W (1400 lm)

|                       |         |         |        |
|-----------------------|---------|---------|--------|
| chrome/colors         | 383,19  | 482,35  | 482,35 |
| materials             | +67,23  | +84,03  |        |
| phantom/black phantom | +100,84 | +126,05 |        |

C 80  
80°/cone glass  
+ small lens medium



max. 26 W (1030 lm)

|                       |         |         |        |
|-----------------------|---------|---------|--------|
| chrome/colors         | 406,72  | 505,88  | 505,88 |
| materials             | +67,23  | +84,03  |        |
| phantom/black phantom | +100,84 | +126,05 |        |

S 100  
100°/lens  
+ satinised glass



max. 26 W (1210 lm)

|                       |         |         |        |
|-----------------------|---------|---------|--------|
| chrome/colors         | 400,00  | 499,16  | 499,16 |
| materials             | +67,23  | +84,03  |        |
| phantom/black phantom | +100,84 | +126,05 |        |

S 100  
100°/lens  
+ satinised glass



max. 26 W (1140 lm)

|                       |         |         |        |
|-----------------------|---------|---------|--------|
| chrome/colors         | 406,72  | 505,88  | 505,88 |
| materials             | +67,23  | +84,03  |        |
| phantom/black phantom | +100,84 | +126,05 |        |

S 80  
80°/lens  
+ soft edge glass



max. 26 W (1250 lm)

|                       |         |         |        |
|-----------------------|---------|---------|--------|
| chrome/colors         | 400,00  | 499,16  | 499,16 |
| materials             | +67,23  | +84,03  |        |
| phantom/black phantom | +100,84 | +126,05 |        |

S 80  
80°/lens  
+ soft edge glass



max. 26 W (1280 lm)

|                       |         |         |        |
|-----------------------|---------|---------|--------|
| chrome/colors         | 423,53  | 522,69  | 522,69 |
| materials             | +67,23  | +84,03  |        |
| phantom/black phantom | +100,84 | +126,05 |        |

S 40  
40°/lens  
+ soft edge glass + small lens medium



max. 26 W (1220 lm)

|                       |         |         |        |
|-----------------------|---------|---------|--------|
| chrome/colors         | 408,40  | 507,56  | 507,56 |
| materials             | +67,23  | +84,03  |        |
| phantom/black phantom | +100,84 | +126,05 |        |

S 40  
40°/lens  
+ soft edge glass + small lens medium

can also be configured as pro version  
excl. power supply at Digital Order System (DOS)

can also be configured as pro version  
excl. power supply at Digital Order System (DOS)

### control

#### features

**230V light engine 26 W (switchable 13/18/26 W)**  
dimmable via trailing-edge phase cut dimmer

#### Occhio air module

Bluetooth dimming module for mounting in hollow ceiling or switch box for max. 4 spotlights

82,35

### inserts

|                |       |
|----------------|-------|
| filter red     | 33,61 |
| filter green   |       |
| filter blue    |       |
| filter yellow  |       |
| filter magenta |       |
| (max. 18 W)    |       |

### options

#### light source

2700 K or 3000 K, perfect color CRI97  
pro version also available in 4000 K, perfect color CRI97

### surfaces

#### head\*/cover

chrome  
shiny chrome  
matt chrome

colors  
matt white  
matt black  
matt gold

materials/phantom/black phantom  
rose gold  
bronze  
phantom  
black phantom

#### tube/edging

matt white  
matt black

\*no cover for edge version, ceiling edge always in color of the tube  
The surfaces rose gold, bronze, phantom and black phantom may differ slightly from other product lines.

### further options

- further lighting effects view page 148  
- accessories for Occhio air from page 226

These and further options can be configured at  
**Occhio Digital Order System (DOS)**

### further information

- technical data and information on mounting options view pages 142-149

# Più spotlights

## recessed spotlights



piano v  
edge

piano v  
cover round

piano v  
cover square



R piano v  
edge

R piano v  
cover round

R piano v  
cover square

non-rotatable,  
non-swiveling

for recessed mounting  
with filigree ceiling edge

for recessed mounting  
installation with cover  
round

for recessed mounting  
installation with cover  
square

for recessed mounting  
with filigree ceiling edge

for recessed mounting  
installation with cover  
round

for recessed mounting  
installation with cover  
square

### versions



max. 26 W (1640 lm)

chrome/colors

278,99

359,66

359,66

materials

—

+16,81

phantom/black phantom

—

+25,21

### C 80

80°/lens

### versions



max. 26 W (1400 lm)

chrome/colors

272,27

352,94

352,94

materials

272,27

+16,81

phantom/black phantom

272,27

+25,21

### C 80

80°/cone glass  
+ small lens medium



max. 26 W (1030 lm)

chrome/colors

295,80

376,47

376,47

materials

—

+16,81

phantom/black phantom

—

+25,21

### S 100

100°/lens  
+ satinised glass



max. 26 W (1140 lm)

chrome/colors

295,80

376,47

376,47

materials

—

+16,81

phantom/black phantom

—

+25,21

### S 80

80°/lens  
+ soft edge glass



max. 26 W (1280 lm)

chrome/colors

312,61

393,28

393,28

materials

—

+16,81

phantom/black phantom

—

+25,21

### S 40

40°/lens  
+ soft edge glass + small lens medium



max. 26 W (1210 lm)

chrome/colors

289,08

369,75

369,75

materials

289,08

+16,81

phantom/black phantom

289,08

+25,21

### S 100

100°/lens  
+ satinised glass



max. 26 W (1250 lm)

chrome/colors

289,08

369,75

369,75

materials

289,08

+16,81

phantom/black phantom

289,08

+25,21

### S 80

80°/lens  
+ soft edge glass



max. 26 W (1220 lm)

chrome/colors

297,48

378,15

378,15

materials

297,48

+16,81

phantom/black phantom

297,48

+25,21

### S 40

40°/lens  
+ soft edge glass + small lens medium

can also be configured as pro version  
excl. power supply at Digital Order System (DOS)

can also be configured as pro version  
excl. power supply at Digital Order System (DOS)

### control

#### features



230V light engine 26 W  
(switchable 13/18/26 W)  
dimmable via trailing-edge  
phase cut dimmer

#### Occhio air module



Bluetooth dimming module for  
mounting in hollow ceiling or switch  
box for max. 4 spotlights

82,35

### inserts

- filter red
- filter green
- filter blue
- filter yellow
- filter magenta

33,61

(max. 18 W)

### options

#### light source

2700 K or 3000 K, perfect color CRI97  
pro version also available in 4000 K, perfect color CRI97

### surfaces

#### head\*/cover

chrome

shiny chrome

matt chrome

#### colors

matt white

matt black

matt gold

#### materials/phantom/black phantom

rose gold

bronze

phantom

black phantom

#### tube/edging

matt white

matt black

\*head and tube of piano v only available in matt white and matt black

The surfaces rose gold, bronze, phantom and black phantom may differ slightly from other product lines.

### further options

- further lighting effects view page 148
- accessories for Occhio air from page 226

These and further options can be configured at  
**Occhio Digital Order System (DOS)**

### further information

- technical data and information on mounting options view pages 142-149

# Più piano pure

## recessed spotlights



piano pure



piano in pure



R piano pure



R piano in pure

360° rotatable  
for recessed mounting installation  
seamless mounting incl. mounting board

swivel range 30°

swivel range 30°

swivel range 30°

swivel range 20°

### versions



max. 26 W (1810 lm)

|                       |         |
|-----------------------|---------|
| chrome/colors         | 504,20  |
| materials             | +67,23  |
| phantom/black phantom | +100,84 |

541,18

**C 80**  
80°/lens  
+ small lens medium



max. 26 W (1210 lm)

|                       |         |
|-----------------------|---------|
| chrome/colors         | 521,01  |
| materials             | +67,23  |
| phantom/black phantom | +100,84 |

557,98

**S 100**  
100°/lens  
+ satinised glass



max. 26 W (1250 lm)

|                       |         |
|-----------------------|---------|
| chrome/colors         | 521,01  |
| materials             | +67,23  |
| phantom/black phantom | +100,84 |

557,98

**S 80**  
80°/lens  
+ soft edge glass



max. 26 W (1220 lm)

|                       |         |
|-----------------------|---------|
| chrome/colors         | 537,82  |
| materials             | +67,23  |
| phantom/black phantom | +100,84 |

574,79

**S 40**  
40°/lens  
+ soft edge glass + small lens medium

can also be configured as pro version  
excl. power supply at Digital Order System (DOS)

### versions



max. 26 W (1400 lm)

|                       |         |
|-----------------------|---------|
| chrome/colors         | 497,48  |
| materials             | +67,23  |
| phantom/black phantom | +100,84 |

534,45

**C 80**  
80°/cone glass  
+ small lens medium



max. 26 W (1210 lm)

|                       |         |
|-----------------------|---------|
| chrome/colors         | 514,29  |
| materials             | +67,23  |
| phantom/black phantom | +100,84 |

551,26

**S 100**  
100°/cone glass  
+ soft edge glass + small lens flat



max. 26 W (1250 lm)

|                       |         |
|-----------------------|---------|
| chrome/colors         | 514,29  |
| materials             | +67,23  |
| phantom/black phantom | +100,84 |

551,26

**S 80**  
80°/cone glass  
+ soft edge glass + small lens medium



max. 26 W (1220 lm)

|                       |         |
|-----------------------|---------|
| chrome/colors         | 522,69  |
| materials             | +67,23  |
| phantom/black phantom | +100,84 |

559,66

**S 40**  
40°/cone glass  
+ Fresnel lens + small lens medium

can also be configured as pro version  
excl. power supply at Digital Order System (DOS)

### control

#### features

**230V light engine 26 W**  
(switchable 13/18/26 W)  
dimmable via trailing-edge  
phase cut dimmer

#### Occhio air module



Bluetooth dimming module for  
mounting in hollow ceiling or switch  
box for max. 4 spotlights

82,35

### inserts

|                |       |
|----------------|-------|
| filter red     | 33,61 |
| filter green   |       |
| filter blue    |       |
| filter yellow  |       |
| filter magenta |       |
| (max. 18 W)    |       |

### options

#### light source

2700 K or 3000 K, perfect color CRI97  
pro version also available in 4000 K, perfect color CRI97

### surfaces

#### head

|              |  |
|--------------|--|
| chrome       |  |
| shiny chrome |  |
| matt chrome  |  |

#### colors

|            |  |
|------------|--|
| matt white |  |
| matt black |  |
| matt gold  |  |

#### materials/phantom/black phantom

|               |  |
|---------------|--|
| rose gold     |  |
| bronze        |  |
| phantom       |  |
| black phantom |  |

#### tube/edging

|            |  |
|------------|--|
| matt white |  |
| matt black |  |

The surfaces rose gold, bronze, phantom and black phantom may differ slightly from other product lines.

### further options

- further lighting effects view page 148  
- accessories for Occhio air from page 226

These and further options can be configured at  
**Occhio Digital Order System (DOS)**

### further information

- technical data and information on mounting options view pages 142-149

## Più mounting accessories

|  |   |   |                         |
|--|---|---|-------------------------|
| <b>sideways inlet (single- or double- sided) through-wiring set (for alto)</b><br>for all surface-mounted versions<br>H 7 mm, ø 76 mm (ø base 88 mm)   |    | matt white  | 28,57                   |
| <b>canopy with outlet on one or both sides</b><br>for all surface-mounted versions<br>H 15 mm, ø 88 mm   |    | shiny chrome<br>glossy white<br>matt chrome<br>matt white<br>matt black | 55,46                   |
| <b>cavity box</b><br>for mounting of flat luminaires<br>in hollow ceilings and -walls  |    |   | 3,36                    |
| <b>inserts</b><br>(color filter max. 18 W)   | filter red<br>filter green<br>filter blue<br>filter yellow<br>filter magenta        |   | 33,61                   |
|  | satinised glass<br>soft edge glass<br>Fresnel-lens                                  |   | 16,81<br>16,81<br>25,21 |
|  | small lens flat<br>small lens medium<br>small lens high                             |   | 23,53                   |
| <b>Occhio air module</b><br>Bluetooth 4.0 dim module for<br>phase-cut dimmable spotlights and power supply units,<br>mounting in cavity or switch box,<br>max. 4 x 32 W (with Occhio converter,<br>other converters max. 52 W),<br>L 40 mm x W 36 mm x H 14 mm |   |   | 82,35                   |
| <b>Occhio air adapter</b>  |   |   |                         |
| <b>for Più alto</b><br>adapter ring incl. »air« module,<br>mounting under surface-mounted spacing box,<br>ø 83 mm, H 14 mm   |  | matt white<br>matt black  | 110,92                  |
| <b>for Più alto v</b><br>adapter ring incl. »air« module,<br>mounting under surface-mounted spacing box,<br>ø 83 mm, H 14 mm   |  | matt white<br>matt black  | 110,92                  |
| <b>for Più alto 3d</b><br>adapter ring incl. »air« module,<br>mounting under surface-mounted spacing box,<br>ø 88 mm, H 14 mm  |  | matt white<br>matt black  | 110,92                  |

Can be configured at **Occhio Digital Order System (DOS)**


## Più alto mounting options

**alto**  
head H42 mm, ø123 mm  
base H20 mm, ø83 mm



52° swivel range  
360° rotatable

solid ceiling with  
230 V mains connection

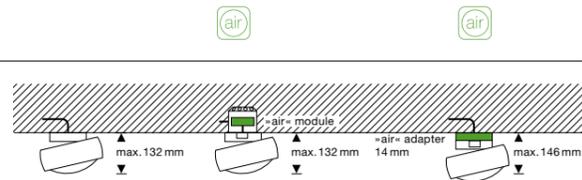


**alto v**  
head H42 mm, ø123 mm  
base H20 mm, ø83 mm




non swiveling

solid ceiling with  
230 V mains connection

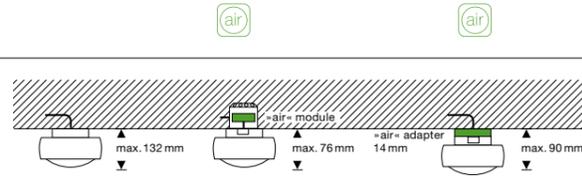


**alto doppio**  
head H42 mm, ø123 mm  
base L 225 mm x W 45 mm x H 21,5 mm



52° swivel range  
360° rotatable

solid ceiling with  
230 V mains connection,  
through-wiring possible

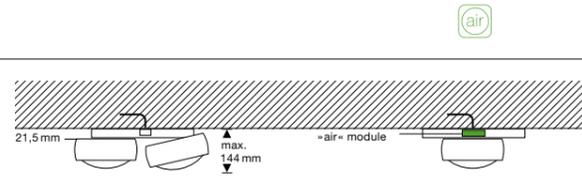

**alto track**  
head H42 mm, ø123 mm  
with in-trac adapter



52° swivel range  
360° rotatable

3-phase track, only for  
Eutrac, Erco and Zumtobel  
tracks\*




## Più alto 3d mounting options

**alto 3d VOLT**  
head H42 mm, ø123 mm  
base H16 mm, ø88 mm



90° swivel range  
360° rotatable

solid ceiling with  
230 V mains connection,  
through-wiring possible

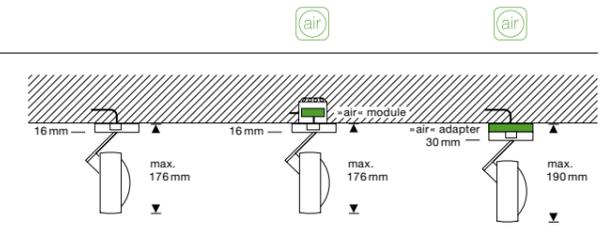


**alto 3d doppio VOLT**  
head H42 mm, ø123 mm  
base L 225 mm x W 45 mm x H 21,5 mm




90° swivel range  
360° rotatable

solid ceiling with  
230 V mains connection,  
through-wiring possible

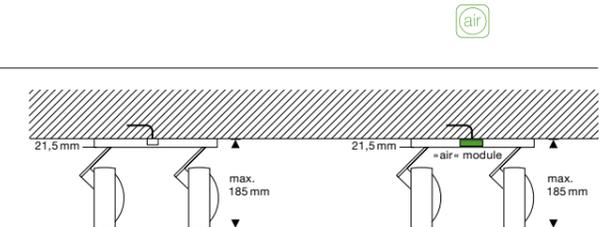

**alto 3d track VOLT**  
head H42 mm, ø123 mm  
with in-trac adapter



90° swivel range  
360° rotatable

3-phase track, only for  
Eutrac, Erco and Zumtobel  
tracks\*



\*adapter for 1 phase tracks can be configured optionally


## Più piano mounting options

**piano edge**  
head H38 mm, ø125 mm




 optional with Occhio air

**edge mounting tube**

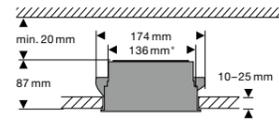

hollow ceiling

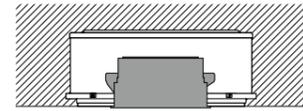


concrete ceiling  
(Kaiser HaloX 250 with mineral-fibre board)



ceiling edge


**piano cover**  
head H38 mm, ø125 mm




20° swivel range  
360° rotatable

 optional with Occhio air


**mounting tube with cover**

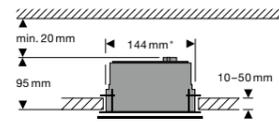

hollow ceiling

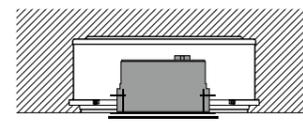

concrete ceiling  
(Kaiser HaloX 250 with mineral-fibre board)



cover


## Più piano in mounting options

**piano in edge**  
head H38 mm, ø125 mm




 optional with Occhio air

**edge mounting tube**

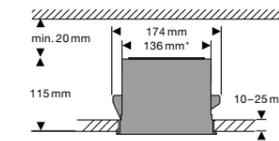

hollow ceiling

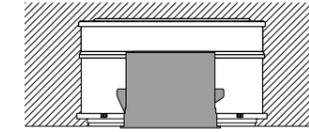


concrete ceiling  
(Kaiser HaloX 250 with 50 mm intermediate frame and mineral-fibre board)



ceiling edge


**piano in cover**  
head H38 mm, ø125 mm




30° swivel range  
360° rotatable

 optional with Occhio air


**mounting tube in with cover**

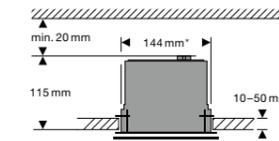

hollow ceiling

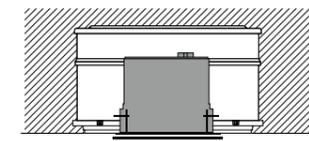

concrete ceiling  
(Kaiser HaloX 250 with 50 mm intermediate frame and mineral-fibre board)



cover

**piano pure**  
head H38 mm, ø125 mm


as pro version (=constant current=)  
excl. remote power supply available



30° swivel range  
360° rotatable


 optional with Occhio air

**mounting board for seamless mounting**

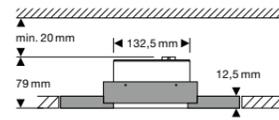


hollow ceiling  
(fibre cement board with holding ring)


**flush-mount ring for seamless mounting**

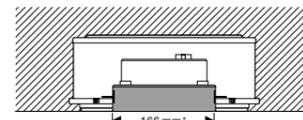

concrete ceiling plastered, no fair-faced concrete  
(Kaiser HaloX 250 with mineral-fibre board)



**holding ring for panel for seamless mounting**

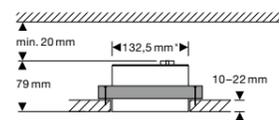

hollow ceiling  
(mounting from back)

**piano in pure**  
head H38 mm, ø125 mm


as pro version (=constant current=)  
excl. remote power supply available



20° swivel range  
360° rotatable


 optional with Occhio air

**mounting board for seamless mounting**

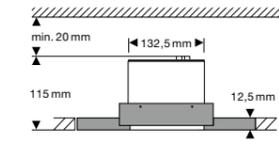


hollow ceiling  
(fibre cement board with holding ring)


**flush-mount ring for seamless mounting**

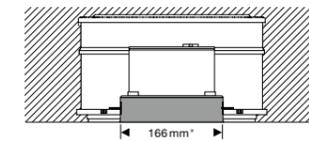

concrete ceiling plastered, no fair-faced concrete  
(Kaiser HaloX 250 with 50 mm intermediate frame and mineral-fibre board)



**holding ring for panel for seamless mounting**

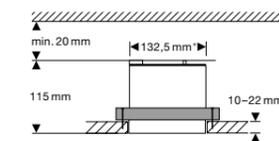

hollow ceiling  
(mounting from back)

\*cut-out dimension

# Più piano v mounting options

**piano v edge**  
head H38 mm, ø125 mm




non swiveling




optional with Occhio air

**edge mounting tube**

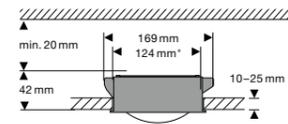

hollow ceiling

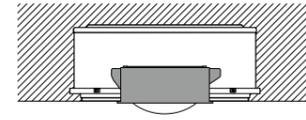


concrete ceiling  
(Kaiser HaloX 250 with mineral-fibre board)



ceiling edge

**piano v cover**  
head H38 mm, ø125 mm




non swiveling




optional with Occhio air


**mounting tube with cover**

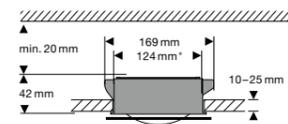

hollow ceiling

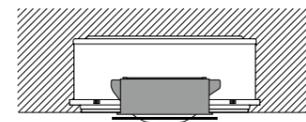

concrete ceiling  
(Kaiser HaloX 250 with mineral-fibre board)



cover

\*cut-out dimension

## Più lighting effects (can be configured)

| head   | lens   | R-version   |
|--|--|---|
| diffus<br> <b>B</b>     |  | diffus/cone glass<br>+ satinised glass<br>+ small lens flat |
| contour<br> <b>C100</b> |  | 100°/cone glass<br>+ small lens flat                        |
|  <b>C80</b>             | 80°/lens   | 80°/cone glass<br>+ small lens medium                       |
| soft<br> <b>S100</b>    | 100°/lens<br>+ satinised glass                       | 100°/cone glass<br>+ soft edge glass<br>+ small lens flat   |
|  <b>S80</b>             | 80°/lens<br>+ soft edge glass                        | 80°/cone glass<br>+ soft edge glass<br>+ small lens medium  |
|  <b>S60</b>           | 60°/lens<br>+ soft edge glass<br>+ small lens flat   | 60°/cone glass<br>+ soft edge glass<br>+ small lens high    |
|  <b>S40</b>           | 40°/lens<br>+ soft edge glass<br>+ small lens medium | 40°/cone glass<br>+ Fresnel-lens<br>+ small lens medium     |
|  <b>S30</b>           | 30°/lens<br>+ Fresnel-lens<br>+ small lens medium    | 30°/cone glass<br>+ Fresnel-lens<br>+ small lens high       |

Più luminaires with these lighting effects are configurable at **Occhio Digital Order System (DOS)**

## Più technical data and control



Occhio VOLT light engine

|                         |     |                |
|-------------------------|-----|----------------|
| connection              | U   | 230 V AC/50 Hz |
| average service life    | t   | > 40.000 h     |
| energy-efficiency class | EEK | G              |

|                       |     |                        |
|-----------------------|-----|------------------------|
| LED                   |     | <b>perfect color</b>   |
| color temperature     | T   | 2700 K, 3000 K         |
| Color Rendering Index | CRI | Ra 97                  |
| recommended use       |     | residential and public |

| power | luminous flux luminaire | P<br>φ | perfect color |         |        |
|-------|-------------------------|--------|---------------|---------|--------|
|       |                         |        | 26 W          | 18 W    | 13 W   |
| Più   | C 80                    |        | 1290 lm       | 970 lm  | 730 lm |
|       | S 100                   |        | 1030 lm       | 780 lm  | 580 lm |
|       | S 80                    |        | 1140 lm       | 860 lm  | 640 lm |
|       | S 60                    |        | 1240 lm       | 930 lm  | 700 lm |
|       | S 40                    |        | 1280 lm       | 960 lm  | 720 lm |
|       | S 30                    |        | 1270 lm       | 950 lm  | 710 lm |
| Più R | B                       |        | 1200 lm       | 900 lm  | 680 lm |
|       | C 100                   |        | 1340 lm       | 1000 lm | 750 lm |
|       | C 80                    |        | 1400 lm       | 1050 lm | 790 lm |
|       | S 100                   |        | 1210 lm       | 910 lm  | 680 lm |
|       | S 80                    |        | 1250 lm       | 940 lm  | 710 lm |
|       | S 60                    |        | 1220 lm       | 920 lm  | 690 lm |
|       | S 30                    |        | 1250 lm       | 940 lm  | 700 lm |

control

Più VOLT luminaires dimmable via trailing-edge phase cut dimmer\*.

Occhio air  
powered by  
Casambi


 **Occhio air**  
control via Bluetooth – switching, dimming of individual luminaires, groups and scenes.

\*compatible dimmers: [occhio.com/dim](http://occhio.com/dim)

M series

# io

The io luminaire series is synonymous with joy: joy in the playful use of light. Joy in the individual design options of the luminaire and the lighting effects. Joy in the perfect synthesis of form and function.

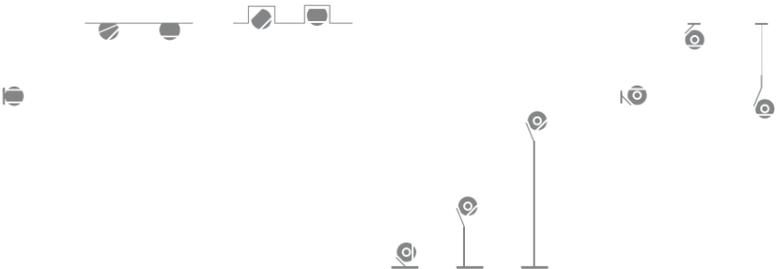

**io spotlights**  
wall luminaires



verticale

for surface mounting  
through-wiring possible

360° rotatable

version

|   |                                      |                                      |         |
|---|--------------------------------------|--------------------------------------|---------|
|  | <b>18 W</b> (1020lm)<br>13 W (750lm) | <b>chrome/colors</b><br>shiny chrome | 462,18  |
|   | <b>13 W</b> (750lm)                  | <b>materials</b>                     | +67,23  |
|   | <b>13 W</b> (750lm)                  | <b>phantom/black phantom</b>         | +100,84 |

**D**  
lens/lens  
80°/80°  
incl. soft edge glass

control

features

 **230 V light engine**  
dimnable via trailing-edge phase cut dimmer

**Occhio air module** 

Bluetooth dimmer module,  
mounting in hollow ceiling or  
switch box, for max. 4 spotlights  
82,35

**Occhio air adapter** 

adapter ring incl. »air« module,  
mounting under luminaire  
110,92

inserts

|   |   |       |
|---|---|-------|
|  | satinised glass, light cone<br>with soft contour approx. 100° | 13,45 |
|  | Fresnel lens, light cone<br>with soft contour approx. 60°     | 28,57 |

options

light source

2700 K or 3000 K, perfect color CRI97

surfaces

head/base

chrome  
shiny chrome 

colors

matt white   
matt black   
matt gold/matt white   
matt gold/matt black 

materials/phantom/black phantom

rose gold/matt black   
bronze/matt black   
phantom/matt black   
black phantom/matt black 

The surfaces rose gold, bronze, phantom and black phantom may differ slightly from other product lines.

further options

- further mounting accessories view page 160  
- accessories for Occhio air from page 226

These and further options can be configured at  
**Occhio Digital Order System (DOS)**

further information

- technical data and information on mounting options view pages 161–164

**io spotlights**  
ceiling spotlights



giro

giro doppio

alto v

for surface mounting  
through-wiring possible

360° rotatable  
swivel range 45°

360° rotatable  
swivel range 45°

non-swiveling

**version\***



**13W** (650lm)

**chrome/colors**

371,43

784,87

302,52

**materials**

+67,23

+134,45

+67,23

**phantom/black phantom**

+100,84

+201,68

+100,84

**C**

lens 80°  
incl. soft edge glass

\*doppio versions: **2x13W** (2 x 490lm)

**control**

**features**



**230V light engine**

dimmable via trailing-edge phase cut dimmer

**Occhio air module**



Bluetooth dimmer module,  
mounting in hollow ceiling or  
switch box, for max. 4 spotlights  
82,35

**Occhio air adapter** (incl. »air« module)

io giro/alto v  
110,92



io giro doppio  
110,92



**inserts**

— satinised glass, light cone  
with soft contour approx. 100°

13,45

— Fresnel lens, light cone  
with soft contour approx. 60°

28,57

**options**

**light source**

2700K or 3000K, perfect color CRI97

**surfaces**

**head/base\***

chrome

shiny chrome/matt white



**colors**

matt white  
matt black  
matt gold/matt white  
matt gold/matt black



**materials/phantom/black phantom**

rose gold/matt black  
bronze/matt black  
phantom/matt black  
black phantom/matt black



\*only for doppio

The surfaces rose gold, bronze, phantom and black phantom may differ slightly from other product lines.

**further options**

- further mounting accessories view page 160  
- accessories for Occhio air from page 226

These and further options can be configured at  
**Occhio Digital Order System (DOS)**

**further information**

- technical data and information on mounting options view pages 161–164

**io spotlights**  
recessed spotlights



piano edge    piano cover round    piano cover square

piano v edge    piano v cover round    piano v cover square

360° rotatable, swivel range 45°  
incl. driver (trailing-edge phase cut dimmable)

for recessed mounting  
with filigree ceiling edge

for recessed mounting  
installation with cover round

for recessed mounting  
installation with cover square

non-swivelling  
incl. driver (trailing-edge  
phase cut dimmable)

non-rotatable,  
for recessed mounting  
with filigree ceiling edge

for recessed mounting  
installation with cover round

for recessed mounting  
installation with cover square

**version**



**13W** (1010lm)

**chrome/colors**

299,16

379,83

379,83

226,89

262,18

262,18

**materials**

+67,23

+84,03

**phantom/black phantom**

+100,84

+126,05

+67,23

+84,03

+126,05

**C**

lens 80°  
incl. soft edge glass

can also be configured as pro version  
excl. power supply at Digital Order System (DOS)

can also be configured as pro version  
excl. power supply at Digital Order System (DOS)

**control**

**features**

»cc« version (constant current)  
incl. remote power supply

**Occhio air module**



Bluetooth dimmer module,  
mounting in hollow ceiling or  
switch box, for max. 4 spotlights  
82,35

**inserts**

(optional)

— satinised glass, light cone  
with soft contour approx. 100°

13,45

— Fresnel lens, light cone  
with soft contour approx. 60°

28,57

**options**

**light source**

2700K or 3000K, perfect color CRI97  
pro version also available in 4000K, perfect color CRI97

**surfaces**

**head/cover\***

chrome

shiny chrome

**colors**

matt white

matt black

matt gold

**materials/phantom/black phantom**

rose gold

bronze

phantom

black phantom

**tube/ceiling edge (edge)**

matt white

matt black

\*head and tube for edge version only available in matt white and matt black  
The surfaces rose gold, bronze, phantom and black phantom may differ slightly from other product lines.

**further options** - accessories for Occhio air from page 226

These and further options can be configured at  
**Occhio Digital Order System (DOS)**

**further information** - technical data and information on mounting options view pages 161–164

**io spotlights**  
recessed spotlights



piano pure

piano v pure

for recessed mounting  
seamless mounting incl. mounting board  
incl. driver (trailing-edge phase cut dimmable)

360° rotatable, swivel range 45°

non-rotatable, non-swiveling

**version**



**13W** (1010lm)

**chrome/colors**

421,85

**materials**

+67,23

**phantom/black phantom**

+100,84

304,20

+67,23

+100,84

**C**  
lens 80°  
incl. soft edge glass

can also be configured as pro version  
excl. power supply at Digital Order System (DOS)

can also be configured as pro version  
excl. power supply at Digital Order System (DOS)

**control**

**features**

»cc« version (constant current)  
incl. remote power supply

**Occhio air module**

Bluetooth dimmer module,  
mounting in hollow ceiling or  
switch box, for max. 4 spotlights  
82,35

**inserts**

(optional)

— satinised glass, light cone  
with soft contour approx. 100°

13,45

— Fresnel lens, light cone  
with soft contour approx. 60°

28,57

**options**

**light source**

2700K or 3000K, perfect color CRI97  
pro version also available in 4000K, perfect color CRI97

**surfaces**

**head/cover\***

chrome

shiny chrome

**colors**

matt white   
matt black   
matt gold

**materials/phantom/black phantom**

rose gold   
bronze   
phantom   
black phantom

**tube**

matt white   
matt black


The surfaces rose gold, bronze, phantom and black phantom may differ slightly from other product lines.

**further options** - accessories for Occhio air from page 226

These and further options can be configured at  
**Occhio Digital Order System (DOS)**





**further information** - technical data and information on mounting options view pages 161–164

## io spotlights mounting accessories

|  |   |   |                |
|--|---|---|----------------|
| <b>sideways inlet (single- or double-sided) through-wiring set for io spotlights</b><br>for all surface-mounted versions<br>H 7 mm, ø 76 mm  |    | matt white  | 28,57          |
| <b>canopy with outlet on one or both sides</b><br>for all surface-mounted versions,<br>H 15 mm, ø 88 mm  |    | shiny chrome<br>glossy white<br>matt chrome<br>matt white<br>matt black | 55,46          |
| <b>cavity box</b><br>for mounting of flat luminaires<br>in hollow ceilings and -walls  |    |   | 3,36           |
| <b>mirror assembly kit</b><br>for mounting the luminaires io verticale directly<br>on a mirror, (drilling diameter 70 mm)<br>no possibility of revision of the power supply<br>via mirrors for flat versions   |    |   | 43,70          |
| <b>Occhio air module</b><br>Bluetooth 4.0 dim module for<br>phase-cut dimmable luminaires and power supply units,<br>mounting in cavity or switch box,<br>max. 4 x 32 W (with Occhio converter,<br>other converters max. 52 W),<br>L 40 mm x W 36 mm x H 14 mm |   |   | 82,35          |
| <b>Occhio air adapter</b><br><b>for io verticale</b><br>adapter ring incl. »air« module,<br>mounting under luminaire,<br>ø 82 mm, H 14 mm  |  | matt white<br>matt black  | 110,92         |
| <b>for io giro/io alto v</b><br>adapter ring incl. »air« module,<br>mounting under luminaire,<br>ø 77 mm, H 10 mm  |  | matt white<br>matt black  | 110,92         |
| <b>for io giro doppio</b><br>adapter ring incl. »air« module,<br>mounting under luminaire,<br>L 196 mm x W 51 mm x H 7 mm  |  | matt white<br>matt black  | 110,92         |
| <b>inserts</b>   | satinised glass<br>Fresnel lens   |   | 13,45<br>28,57 |

Can be configured at **Occhio Digital Order System (DOS)**

## io spotlights mounting options
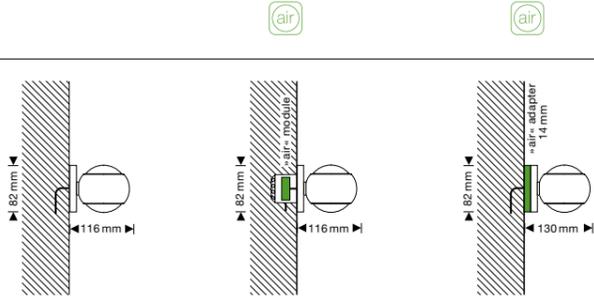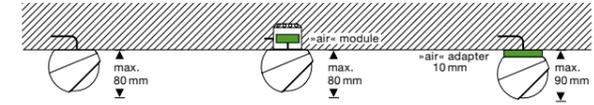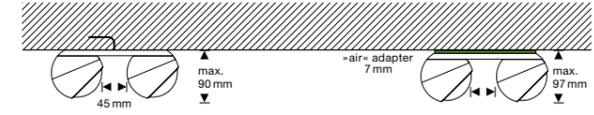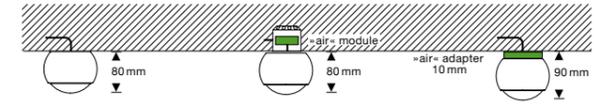
|   |   |  |   |
|---|---|--|---|
| <b>verticale</b><br>head ø 100 mm, L 116 mm                                       | <br>360° rotatable                       | solid wall with<br>230V power supply,<br>through-wiring possible |    |
| <b>giro</b><br>head ø 100 mm, H 80 mm   | <br>45° swivel angle<br>360° rotatable   | solid wall with<br>230V power supply,<br>through-wiring possible |    |
| <b>giro doppio</b><br>head ø 100 mm, H 80 mm<br>base L 222 mm x W 76 mm x H 11 mm | <br>45° swivel angle<br>360° rotatable | solid wall with<br>230V power supply,<br>through-wiring possible |  |
| <b>alto v</b><br>head ø 100 mm, H 80 mm   | <br>non swiveling                      | solid wall with<br>230V power supply                             |  |


# io spotlights piano mounting options

**piano edge**  
head H50 mm, ø100 mm




optional with Occhio air

**edge mounting tube**

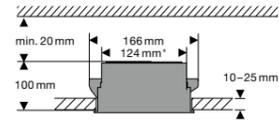

hollow ceiling

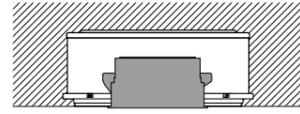

concrete ceiling  
(Kaiser HaloX 250 with mineral-fibre board)  
power supply max. L 210 mm x H 30 mm




ceiling edge

**piano v edge**  
head H 50 mm, ø100 mm




optional with Occhio air

**edge mounting tube**

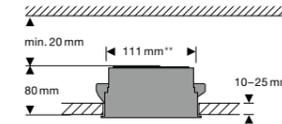

hollow ceiling

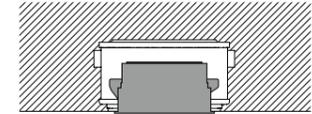

concrete ceiling  
(Kaiser HaloX 180 with mineral-fibre board)  
power supply max. L 130 mm x H 30 mm




ceiling edge

**piano cover**  
head H50 mm, ø100 mm




optional with Occhio air

**mounting tube with cover**

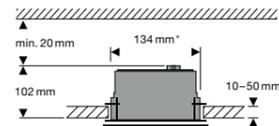

hollow ceiling

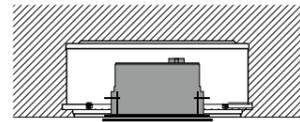

concrete ceiling  
(Kaiser HaloX 250 with mineral-fibre board)  
power supply max. L 210 mm x H 30 mm




cover

**piano v cover**  
head H 50 mm, ø100 mm




optional with Occhio air

**mounting tube with cover**

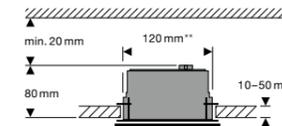

hollow ceiling

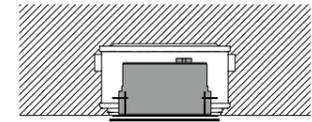

concrete ceiling  
(Kaiser HaloX 180 with mineral-fibre board)  
power supply max. L 130 mm x H 30 mm



cover


**piano pure**  
head H50 mm, ø100 mm

as pro version excl.  
remote power supply available




optional with Occhio air

**mounting board for seamless mounting**

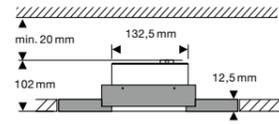


hollow ceiling  
(fibre cement board with holding ring)

**flush-mount ring for seamless mounting**

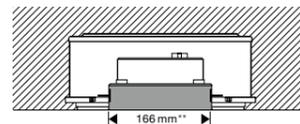

concrete ceiling plastered, no fair-faced concrete  
(Kaiser HaloX 250 with mineral-fibre board)  
power supply max. L 210 mm x H 30 mm




**piano pure**  
head H 50 mm, ø100 mm

as pro version excl.  
remote power supply available




optional with Occhio air

**mounting board for seamless mounting**

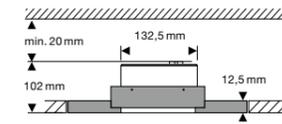


hollow ceiling  
(fibre cement board with holding ring)

**flush-mount ring for seamless mounting**

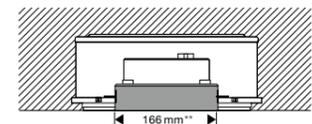

concrete ceiling plastered, no fair-faced concrete  
(Kaiser HaloX 250 with mineral-fibre board)  
power supply max. L 210 mm x H 30 mm



\*compatible dimmers: [occhio.com/dim](http://occhio.com/dim)  
\*\*cut-out dimension

# io spotlights technical data and control



Occhio VOLT light engine

|                         |     |              |
|-------------------------|-----|--------------|
| connection              | U   | 230V AC/50Hz |
| average service life    | t   | >40.000h     |
| energy-efficiency class | EEK | G            |

|                       |     |                        |
|-----------------------|-----|------------------------|
| LED                   |     | <b>perfect color</b>   |
| color temperature     | T   | 2700K, 3000K           |
| Color Rendering Index | CRI | Ra 97                  |
| recommended use       |     | residential and public |

|                         |   |                      |            |
|-------------------------|---|----------------------|------------|
| power                   | P | <b>perfect color</b> |            |
| luminous flux luminaire | φ | <b>13W</b>           | <b>18W</b> |

|                    |  |       |        |
|--------------------|--|-------|--------|
| <b>giro/alto v</b> |  |       |        |
| C                  |  | 650lm |        |
| <b>verticale</b>   |  |       |        |
| D                  |  | 570lm | 1020lm |

## control

Occhio air  
powered by  
Casambi

io spotlights VOLT luminaires dimmable via trailing-edge phase cut dimmer\*.  
List of compatible dimmer see below [occhio.com/dim](http://occhio.com/dim).

 **Occhio air**  
control via Bluetooth – switching, dimming of individual luminaires, groups and scenes.

\*compatible dimmers: [occhio.com/dim](http://occhio.com/dim)

**io 3d**  
table and floor luminaires




basso

14 cm



tavolo

40 cm

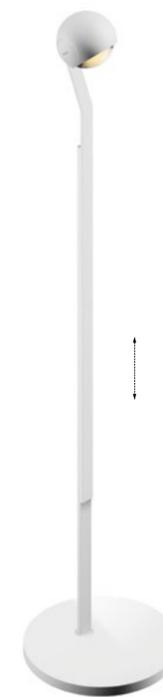

lettura

120–150 cm  
height adjustable

head and body 360° rotatable  
pads exchangeable  
incl. plug-in power supply

**version**



18 W (800 lm)

|                              |         |
|------------------------------|---------|
| <b>chrome/colors</b>         | 586,55  |
| <b>materials</b>             | +67,23  |
| <b>phantom/black phantom</b> | +100,84 |

677,31

1.136,13

+67,23

+100,84

**C**  
lens  
80°

**control**

**features**

switchable and dimmable via »touchless control«  
power 13/18W switchable

**inserts**

|  |                |       |
|--|----------------|-------|
|  | filter red     | 23,53 |
|  | filter green   |       |
|  | filter blue    |       |
|  | filter yellow  |       |
|  | filter magenta |       |
|  | (max. 13 W)    |       |

|  |  |       |
|--|--|-------|
|  | satinised glass, light cone with soft contour approx. 100° | 13,45 |
|  | soft edge glass, light cone with soft contour approx. 80°  | 16,81 |
|  | Fresnel lens, light cone with soft contour approx. 60°     | 28,57 |

**options**

**light source**

2700 K or 3000 K, perfect color CRI97

**surfaces**

**head/pads/body/base**  
**chrome**

shiny chrome  
chrome matt  
glossy white/shiny chrome/glossy white



**colors**

matt white  
matt black  
matt gold/matt white  
matt gold/matt black



**materials/phantom/black phantom**

rose gold/matt black  
bronze/matt black  
phantom/matt black  
black phantom/matt black




The surfaces rose gold, bronze, phantom and black phantom may differ slightly from other product lines.

**further information**

- technical data view page 172

**io 3d**  
wall and ceiling luminaires

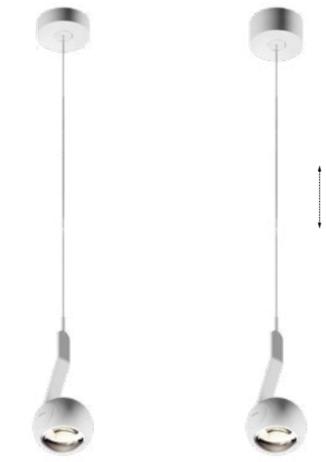

pico

sospeso

head and body 360° rotatable  
pads and inserts exchangeable

**up/flat**

flat versions can be synced

**fix, up/flat**  
cable length adjustable during mounting, 80–180 cm

**variable, up/flat**  
continuous height adjustment 50–200 cm

**version**

|   |                          |                              |         |
|---|--------------------------|------------------------------|---------|
|  | <b>max. 18W</b> (1170lm) | <b>chrome/colors</b>         | 559,66  |
|   |                          | <b>materials</b>             | +67,23  |
|   |                          | <b>phantom/black phantom</b> | +100,84 |

**C**  
lens  
80°

|         |        |
|---------|--------|
| 670,59  | 939,50 |
| +67,23  |        |
| +100,84 |        |

special lengths up to 1000 cm possible (surcharge +142,86, non discountable)  
longer version, fix (180–280 cm) configurable (with surcharge)

|                |  |   |  |  |  |
|----------------|--|---|--|--|--|
| <b>control</b> | <b>features</b><br>switchable and dimmable via »touchless control« (can be deactivated), alternatively dimmable via trailing-edge phase cut dimmer power 13/18W switchable | <b>Occhio air module</b> <br>Bluetooth dimmer module, mounting in hollow ceiling or switch box, for max. 4 spotlights<br>82,35 | <b>Occhio air adapter</b> <br>adapter ring incl. »air« module, mounting under surface-mounted spacing box<br>110,92 | <b>inserts</b><br> filter red<br> filter green<br> filter blue<br> filter yellow<br> filter magenta<br>(max. 13 W)<br>23,53 |  satinised glass, light cone with soft contour approx. 100°<br>13,45<br> soft edge glass, light cone with soft contour approx. 80°<br>16,81<br> Fresnel lens, light cone with soft contour approx. 60°<br>28,57 |
|----------------|--|---|--|--|--|

|                |  |   |   |  |   |   |   |
|----------------|--|---|---|--|---|---|---|
| <b>options</b> | <b>light source</b><br>2700 K or 3000 K, perfect color CRI97 | <b>mounting options</b><br><br>with integrated converter for surface mounting, through-wiring possible | <b>flat</b> <br>with flat base for hollow ceiling with hollow ceiling box (incl. remote converter) | <b>surfaces</b><br> shiny chrome<br> chrome matt<br> glossy white/shiny chrome/glossy white | <b>head/pads/body/base</b><br>chrome<br>shiny chrome<br>chrome matt<br>glossy white/shiny chrome/glossy white | <b>colors</b><br> matt white<br> matt black<br> matt gold/matt white<br> matt gold/matt black | <b>materials/phantom/black phantom</b><br> rose gold/matt black<br> bronze/matt black<br> phantom/matt black<br> black phantom/matt black |
|----------------|--|---|---|--|---|---|---|

The surfaces rose gold, bronze, phantom and black phantom may differ slightly from other product lines.

**further options** - further mounting accessories view page 170  
- accessories for Occhio air from page 226

These and further options can be configured at **Occhio Digital Order System (DOS)**

**further information** - technical data and information on mounting options view pages 171–172

## io 3d mounting accessories


|  |  |   |                                      |
|--|--|---|--------------------------------------|
| <b>sideways inlet (single- or double-sided)</b><br>for all surface-mounted versions,<br>H 7 mm, ø 76 mm (ø base 88 mm)   |   | matt white  | 28,57                                |
| <b>canopy with outlet on one or both sides</b><br>for all surface-mounted versions,<br>H 15 mm, ø 88 mm  |   | shiny chrome<br>glossy white<br>matt chrome<br>matt white<br>matt black | 55,46                                |
| <b>cable redirection</b><br>for sospeso<br>H 18 mm, ø 15 mm  |   | shiny chrome<br>matt chrome<br>matt white<br>matt black                 | 35,29                                |
| <b>mirror assembly kit</b><br>for mounting the luminaires io pico directly<br>on a mirror, (drilling diameter 70 mm)<br>no possibility of revision of the power supply<br>via mirrors  |   |   | 43,70                                |
| <b>cavity box</b><br>for mounting of flat luminaires<br>in hollow ceilings and -walls  |   |   | 3,36                                 |
| <b>Occhio air module</b><br>Bluetooth 4.0 dim module for<br>phase-cut dimmable luminaires and power supply units,<br>mounting in cavity or switch box,<br>max. 4 x 32 W (with Occhio converter,<br>other converters max. 52 W),<br>L 40 mm x W 36 mm x H 14 mm |  |   | 82,35                                |
| <b>Occhio air adapter</b><br>adapter ring incl. »air« module,<br>mounting under luminaire,<br>ø 88 mm, H 14 mm   |   | matt white<br>matt black  | 110,92                               |
| <b>inserts</b>   | satinised glass<br>soft edge glass<br>Fresnel lens<br><br>filter red<br>filter green<br>filter blue<br>filter yellow<br>filter magenta |   | 13,45<br>16,81<br>28,57<br><br>23,53 |

Can be configured at **Occhio Digital Order System (DOS)**

## io 3d mounting options


head Ø 100 mm

**up**  
 with integrated power supply for surface mounting,  
 through-wiring possible

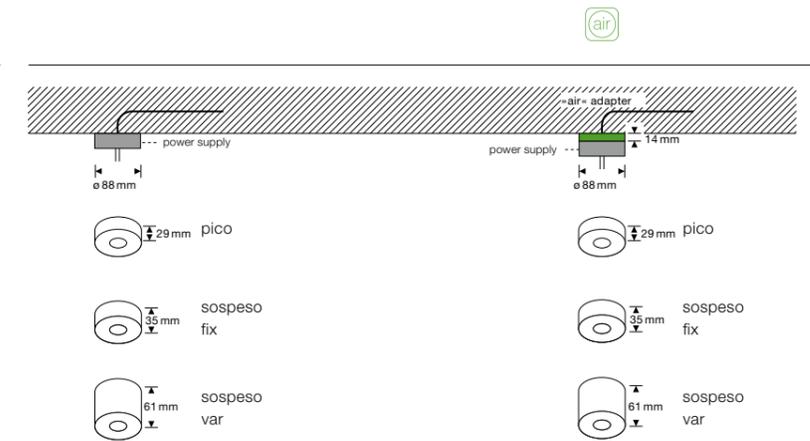

**flat**

with flat base for cavity box,  
 remote power supply

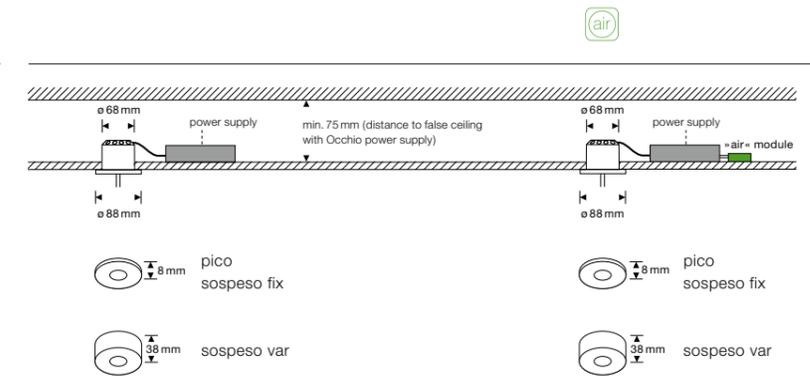

## io 3d technical data and control

### version »touchless control«

|                         |     |                     |
|-------------------------|-----|---------------------|
| connection              | U   | 48 V DC (min. 22 W) |
| average service life    | t   | > 50.000 h          |
| energy-efficiency class | EEK | G                   |

|                       |     |                        |
|-----------------------|-----|------------------------|
| LED                   |     | <b>perfect color</b>   |
| color temperature     | T   | 2700 K, 3000 K         |
| Color Rendering Index | CRI | Ra 97                  |
| recommended use       |     | residential and public |

|                         |        |                         |
|-------------------------|--------|-------------------------|
| power                   | P      | <b>perfect color</b>    |
| luminous flux luminaire | $\phi$ | <b>13 W</b> <b>18 W</b> |
| C                       |        | 800 lm    1170 lm       |

### control

#### with Occhio power supply

The Occhio power supply is perfectly matched to these requirements and can be dimmed by trailing-edge phase cut dimmer\*. Can not be used in conjunction with »touchless control« or Occhio air.

*Occhio air  
powered by  
Casambi*

 **Occhio air**  
control via Bluetooth – switching, dimming of individual luminaires, groups and scenes.

### touchless dim funktion io luminaire heads

18 W/13 W  
luminaires are dimmed using remote trailing-edge phase cut dimmers\*  
(except for floor and table luminaires) or controlled with Occhio air (optional), (switching, dimming).




18 W SENSOR/13 W SENSOR  
luminaires can be controlled by the »touchless control« with simple gestures integrated in the head  
(switching, dimming) – cannot be combined with Occhio air.

\*compatible dimmers: [occhio.com/dim](http://occhio.com/dim)

M series

# lui

The lui spotlight system is lighting technology in its most beautiful form: interchangeable optics like in the field of photography open new lighting possibilities – with top quality of light and maximum efficiency.



# lui spotlights

## ceiling spotlights



zoom continuously adjustable light cone    volto    alto    alto v    alto doppio    lens fixed light cone    volto    alto    alto v    alto doppio

through-wiring possible    360° rotatable swivel range 90° for surface mounting    360° rotatable swivel range 45° mounting on ceiling box    non-swiveling for surface mounting    360° rotatable swivel range 45° for surface mounting    through-wiring possible    360° rotatable swivel range 90° for surface mounting    360° rotatable swivel range 45° mounting on ceiling box    non-swiveling for surface mounting    360° rotatable swivel range 45° for surface mounting

| version*   | 18W (420lm)<br>13W (310lm) | colors<br>shiny chrome | 561,34 | 448,74 | 351,26 | 944,54 | 18W (540lm)<br>13W (400lm)   | colors<br>shiny chrome | 542,86 | 430,25 | 332,77 | 907,56 |
|--|----------------------------|------------------------|--------|--------|--------|--------|--|------------------------|--------|--------|--------|--------|
|  | 18W (420lm)                | materials              | +16,81 |        |        | +33,61 | 18W (540lm)  | materials              | +16,81 |        |        | +33,61 |
|  | 18W (420lm)                | phantom/black phantom  | +25,21 |        |        | +50,42 | 18W (540lm)  | phantom/black phantom  | +25,21 |        |        | +50,42 |
| <b>zoom</b><br>20°-60°/soft edge glass<br>+ zoom optic |                            |                        |        |        |        |        | <b>C 80</b><br>80°/clear glass + small lens medium<br>+ lens optic |                        |        |        |        |        |

|  |                            |                        |        |        |        |        |  |           |        |  |  |        |
|--|----------------------------|------------------------|--------|--------|--------|--------|--|-----------|--------|--|--|--------|
|  | 18W (540lm)<br>13W (400lm) | colors<br>shiny chrome | 542,86 | 430,25 | 332,77 | 907,56 | 18W (540lm)  | materials | +16,81 |  |  | +33,61 |
|  | 18W (540lm)                | phantom/black phantom  | +25,21 |        |        | +50,42 | <b>S 80</b><br>80°/soft edge glass + small lens medium<br>+ lens optic |           |        |  |  |        |
|  | 18W (450lm)<br>13W (340lm) | colors<br>shiny chrome | 542,86 | 430,25 | 332,77 | 907,56 | 18W (450lm)  | materials | +16,81 |  |  | +33,61 |
|  | 18W (450lm)                | phantom/black phantom  | +25,21 |        |        | +50,42 | <b>S 40</b><br>40°/Fresnel lens + small lens medium<br>+ lens optic    |           |        |  |  |        |

\*doppio versions: 2 x 18W/13W

\*doppio versions: 2 x 18W/13W

| control | features  | Occhio air module   | Occhio air adapter  | inserts  |
|---------|---|---|---|--|
|         | <b>230V light engine</b><br>dimmable via trailing-edge phase cut dimmer, max. light output, adjustable via rotary knob on the rear side of the head | Bluetooth dimming module, for mounting in hollow ceiling or switch box (can be put in doppio base), for max. 4 spotlights | adapter ring incl. »air« module (only volto + alto v), mounting under luminaire | <ul style="list-style-type: none"> <li>filter red</li> <li>filter green</li> <li>filter blue</li> <li>filter yellow</li> <li>filter magenta</li> </ul> (for zoom-optics) |
|         |   | 82,35   | 110,92  | 30,25  |

| options | light source                        | surfaces | head/optics/base   | materials/phantom/black phantom   |
|---------|-------------------------------------|----------|--|---|
|         | 2700K or 3000K, perfect color CRI97 |          | chrome<br>shiny chrome**   | matt black/rose gold/matt black<br>matt black/bronze/matt black<br>matt black/phantom/matt black<br>matt black/black phantom/matt black |
|         |                                     |          | colors<br>matt white<br>matt black<br>matt white/matt gold/matt white<br>matt black/matt gold/matt black                                       |   |
|         |                                     |          | **always matt white for doppio base<br>The surfaces rose gold, bronze, phantom and black phantom may differ slightly from other product lines. |   |

**further options** - further lighting effects view page 190  
 - further mounting accessories view page 186  
 - further accessories for Occhio air from page 226

These and further options can be configured at **Occhio Digital Order System (DOS)**

**further information** - technical data and information on mounting options view pages 187-191

# lui spotlights

## track spotlights



zoom continuously adjustable light cone

alto track

swivel range 55°  
360° rotatable  
with in-trac adapter, for Eutrac, Erco and Zumtobel 3-phase tracks

### version



|                    |                       |         |
|--------------------|-----------------------|---------|
| <b>18W</b> (420lm) | <b>colors</b>         | 443,70  |
| 13W (310lm)        | shiny chrome          |         |
| <b>18W</b> (420lm) | <b>materials</b>      | + 16,81 |
|                    | phantom/black phantom | +25,21  |

### zoom

20°–60°/soft edge glass  
+ zoom optic



lens fixed light cone

alto track

swivel range 55°  
360° rotatable  
with in-trac adapter, for Eutrac, Erco and Zumtobel 3-phase tracks

### version



|                    |                       |         |
|--------------------|-----------------------|---------|
| <b>18W</b> (540lm) | <b>colors</b>         | 425,21  |
| 13W (400lm)        | shiny chrome          |         |
| <b>18W</b> (540lm) | <b>materials</b>      | + 16,81 |
|                    | phantom/black phantom | +25,21  |

### C 80

80°/clear glass + small lens medium  
+ lens optic



|                    |                       |         |
|--------------------|-----------------------|---------|
| <b>18W</b> (540lm) | <b>colors</b>         | 425,21  |
| 13W (400lm)        | shiny chrome          |         |
| <b>18W</b> (540lm) | <b>materials</b>      | + 16,81 |
|                    | phantom/black phantom | +25,21  |

### S 80

80°/soft edge glass + small lens medium  
+ lens optic



|                    |                       |         |
|--------------------|-----------------------|---------|
| <b>18W</b> (450lm) | <b>colors</b>         | 425,21  |
| 13W (340lm)        | shiny chrome          |         |
| <b>18W</b> (450lm) | <b>materials</b>      | + 16,81 |
|                    | phantom/black phantom | +25,21  |

### S 40

40°/Fresnel lens small + lens medium  
+ lens optic

### control

### features



#### 230V light engine

dimnable via trailing-edge phase cut dimmer, max. light output, adjustable via rotary knob on the rear side of the head

### inserts

|  |                |       |
|--|----------------|-------|
|  | filter red     | 30,25 |
|  | filter green   |       |
|  | filter blue    |       |
|  | filter yellow  |       |
|  | filter magenta |       |

(for zoom-optics)

### options

### light source

2700K or 3000K, perfect color CRI97

### surfaces

### head/optics/adaptor chrome

shiny chrome/matt white  
shiny chrome/matt chrome



### colors

matt white  
matt black  
matt white/matt gold/matt white  
matt black/matt gold/matt black



### head/optics/base materials/phantom/black phantom

matt black/rose gold/matt black  
matt black/bronze/matt black  
matt black/phantom/matt black  
matt black/black phantom/matt black



The surfaces rose gold, bronze, phantom and black phantom may differ slightly from other product lines.

### further options

- further lighting effects view page 190  
- further accessories for Occhio air from page 226

These and further options can be configured at  
**Occhio Digital Order System (DOS)**

### further information

- technical data and information on mounting options view pages 187–191

# lui spotlights

## recessed spotlights



**ZOOM** continuously adjustable light cone

piano edge

piano cover round

piano cover square

**lens** fixed light cone

piano edge

piano cover round

piano cover square

360° rotation, swivel range 45° incl. driver (trailing-edge phase cut dimmable)

for recessed mounting with filigree ceiling edge

for recessed mounting with cover round

for recessed mounting with cover square

360° rotation, swivel range 45° incl. driver (trailing-edge phase cut dimmable)

for recessed mounting with filigree ceiling edge

for recessed mounting with cover round

for recessed mounting with cover square

**version**



|                     |                              |         |
|---------------------|------------------------------|---------|
| <b>18 W</b> (890lm) | <b>chrome/colors</b>         | 299,16  |
|                     | <b>materials</b>             | + 16,81 |
|                     | <b>phantom/black phantom</b> | + 25,21 |

|         |
|---------|
| 379,83  |
| + 33,61 |
| + 50,42 |

|        |
|--------|
| 379,83 |
|--------|

**zoom**

20°–60°/soft edge glass + zoom optic

**version**



|                      |                              |         |
|----------------------|------------------------------|---------|
| <b>18 W</b> (1010lm) | <b>chrome/colors</b>         | 280,67  |
|                      | <b>materials</b>             | + 16,81 |
|                      | <b>phantom/black phantom</b> | + 25,21 |

|         |
|---------|
| 361,34  |
| + 33,61 |
| + 50,42 |

|        |
|--------|
| 361,34 |
|--------|

**C 80**

80°/clear glass + small lens medium + lens optic



|                      |                              |         |
|----------------------|------------------------------|---------|
| <b>18 W</b> (1010lm) | <b>chrome/colors</b>         | 280,67  |
|                      | <b>materials</b>             | + 16,81 |
|                      | <b>phantom/black phantom</b> | + 25,21 |

|         |
|---------|
| 361,34  |
| + 33,61 |
| + 50,42 |

|        |
|--------|
| 361,34 |
|--------|

**S 80**

80°/soft edge glass + small lens medium + lens optic



|                     |                              |         |
|---------------------|------------------------------|---------|
| <b>18 W</b> (910lm) | <b>chrome/colors</b>         | 280,67  |
|                     | <b>materials</b>             | + 16,81 |
|                     | <b>phantom/black phantom</b> | + 25,21 |

|         |
|---------|
| 361,34  |
| + 33,61 |
| + 50,42 |

|        |
|--------|
| 361,34 |
|--------|

**S 40**

40°/Fresnel lens + small lens medium + lens optic

can also be configured as pro version  
excl. power supply at Digital Order System (DOS)

can also be configured as pro version  
excl. power supply at Digital Order System (DOS)

**control**

**features**

»cc« version (constant current)  
incl. remote power supply

**Occhio air module**

Bluetooth dimming module, for mounting in hollow ceiling or switch box for max. 4 spotlights

82,35

**inserts**

|  |                |       |
|--|----------------|-------|
|  | filter red     | 30,25 |
|  | filter green   |       |
|  | filter blue    |       |
|  | filter yellow  |       |
|  | filter magenta |       |

(for zoom-optics)

**options**

**light source**

2700 K or 3000 K, perfect color CRI97  
pro version also available in 4000 K, perfect color CRI97

**surfaces**

**optics/cover\***

|              |
|--------------|
| chrome       |
| shiny chrome |
| matt chrome  |

**colors**

|            |
|------------|
| matt white |
| matt black |
| matt gold  |

**materials/phantom/black phantom**

|               |
|---------------|
| rose gold     |
| bronze        |
| phantom       |
| black phantom |

**tube\*/ceiling edge**

|            |
|------------|
| matt white |
| matt black |

\*tube only available in matt white and matt black  
The surfaces rose gold, bronze, phantom and black phantom may differ slightly from other product lines.

**further options**

- further lighting effects view page 190  
- further accessories for Occhio air from page 226

These and further options can be configured at  
**Occhio Digital Order System (DOS)**

**further information**

- technical data and information on mounting options view pages 187–191

# lui spotlights

## recessed spotlights



**zoom** continuously adjustable light cone

piano v  
edge

piano v  
cover round

piano v  
cover square

**lens** fixed light cone

piano v  
edge

piano v  
cover round

piano v  
cover square

non-swiveling  
incl. driver (trailing-edge phase cut dimmable)

non-rotatable  
for recessed mounting  
with filigree ceiling edge

for recessed mounting  
with cover round

for recessed mounting  
with cover square

non-swiveling  
incl. driver (trailing-edge phase cut dimmable)

non-rotatable  
for recessed mounting  
with filigree ceiling edge

for recessed mounting  
with cover round

for recessed mounting  
with cover square

**version**



|                    |                              |         |
|--------------------|------------------------------|---------|
| <b>18W</b> (890lm) | <b>chrome/colors</b>         | 226,89  |
|                    | <b>materials</b>             | + 16,81 |
|                    | <b>phantom/black phantom</b> | + 25,21 |

|         |
|---------|
| 262,18  |
| + 33,61 |
| + 50,42 |

|        |
|--------|
| 262,18 |
|--------|

**zoom**  
20°–60°/soft edge glass  
+ zoom optic

**version**



|                     |                              |         |
|---------------------|------------------------------|---------|
| <b>18W</b> (1010lm) | <b>chrome/colors</b>         | 208,40  |
|                     | <b>materials</b>             | + 16,81 |
|                     | <b>phantom/black phantom</b> | + 25,21 |

|         |
|---------|
| 243,70  |
| + 33,61 |
| + 50,42 |

|        |
|--------|
| 243,70 |
|--------|

**C 80**  
80°/clear glass + small lens medium  
+ lens optic



|                     |                              |         |
|---------------------|------------------------------|---------|
| <b>18W</b> (1010lm) | <b>chrome/colors</b>         | 208,40  |
|                     | <b>materials</b>             | + 16,81 |
|                     | <b>phantom/black phantom</b> | + 25,21 |

|         |
|---------|
| 243,70  |
| + 33,61 |
| + 50,42 |

|        |
|--------|
| 243,70 |
|--------|

**S 80**  
80°/soft edge glass + small lens medium  
+ lens optic



|                    |                              |         |
|--------------------|------------------------------|---------|
| <b>18W</b> (910lm) | <b>chrome/colors</b>         | 208,40  |
|                    | <b>materials</b>             | + 16,81 |
|                    | <b>phantom/black phantom</b> | + 25,21 |

|         |
|---------|
| 243,70  |
| + 33,61 |
| + 50,42 |

|        |
|--------|
| 243,70 |
|--------|

**S 40**  
40°/Fresnel lens + small lens medium  
+ lens optic

can also be configured as pro version  
excl. power supply at Digital Order System (DOS)

can also be configured as pro version  
excl. power supply at Digital Order System (DOS)

**control** features  
»cc« version (constant current)  
incl. remote power supply

**Occhio air module** Bluetooth dimming module,  
for mounting in hollow ceiling or  
switch box for max. 4 spotlights

82,35

**inserts**

|  |                |       |
|--|----------------|-------|
|  | filter red     | 30,25 |
|  | filter green   |       |
|  | filter blue    |       |
|  | filter yellow  |       |
|  | filter magenta |       |

(for zoom-optics)

**options** light source  
2700K or 3000K, perfect color CRI97  
pro version also available in 4000K, perfect color CRI97

**surfaces**

|                      |               |  |                           |
|----------------------|---------------|--|---------------------------|
| <b>optics/cover*</b> | <b>colors</b> | <b>materials/phantom/black phantom</b> | <b>tube*/ceiling edge</b> |
| chrome               |               |  |                           |
| shiny chrome         | matt white    | rose gold                              | matt white                |
| matt chrome          | matt black    | bronze                                 | matt black                |
|                      | matt gold     | phantom                                |                           |
|                      |               | black phantom                          |                           |

\*tube only available in matt white and matt black  
The surfaces rose gold, bronze, phantom and black phantom may differ slightly from other product lines.

**further options**  
- further lighting effects view page 190  
- further accessories for Occhio air from page 226

These and further options can be configured at  
**Occhio Digital Order System (DOS)**

**further information** - technical data and information on mounting options view pages 187–191

# lui spotlights

## recessed spotlights



**ZOOM** continuously adjustable light cone

piano pure

piano v pure

**lens** fixed light cone

piano pure

piano v pure

for recessed mounting  
seamless mounting incl. mounting board  
incl. driver (trailing-edge phase cut dimmable)

360° rotatable  
swivel range 45°

non-swiveling

for recessed mounting  
seamless mounting incl. mounting board  
incl. driver (trailing-edge phase cut dimmable)

360° rotatable  
swivel range 45°

non-swiveling

**version**



**18W** (890lm) **chrome/colors** 421,85  
**materials** +16,81  
**phantom/black phantom** +25,21

**zoom**

20°–60°/soft edge glass  
+ zoom optic

304,20

**version**



**18W** (1010lm) **chrome/colors** 403,36  
**materials** +16,81  
**phantom/black phantom** +25,21

**C 80**

80°/clear glass + small lens medium  
+ lens optic

285,71



**18W** (1010lm) **chrome/colors** 403,36  
**materials** +16,81  
**phantom/black phantom** +25,21

**S 80**

80°/soft edge glass + small lens medium  
+ lens optic

285,71



**18W** (910lm) **chrome/colors** 403,36  
**materials** +16,81  
**phantom/black phantom** +25,21

**S 40**

40°/Fresnel lens + small lens medium  
+ lens optic

285,71

can also be configured as pro version  
excl. power supply at Digital Order System (DOS)

can also be configured as pro version  
excl. power supply at Digital Order System (DOS)

**control**

**features**

»cc« version (constant current)  
incl. remote power supply

**Occhio air module**

Bluetooth dimming module,  
for mounting in hollow ceiling or  
switch box for max. 4 spotlights

82,35

**inserts**

- filter red
- filter green
- filter blue
- filter yellow
- filter magenta

(for zoom-optics)

30,25

**options**

**light source**

2700K or 3000K, perfect color CRI97  
pro version also available in 4000K, perfect color CRI97

**surfaces**

**optics**

**chrome**

- shiny chrome
- matt chrome

**colors**

- matt white
- matt black
- matt gold

**materials/phantom/black phantom**

- rose gold
- bronze
- phantom
- black phantom

**tube\***

- matt white
- matt black

\*for tube further surfaces can be configured.  
The surfaces rose gold, bronze, phantom and black phantom may differ slightly from other product lines.

**further options**

- further lighting effects view page 190
- further accessories for Occhio air from page 226

These and further options can be configured at  
**Occhio Digital Order System (DOS)**

**further information**







- technical data and information on mounting options view pages 187–191

## lui spotlights mounting accessories

|  |   |   |        |
|--|---|---|--------|
| <b>sideways inlet (single- or double-sided)</b><br>for all surface-mounted versions,<br>H 7 mm, ø 76 mm (ø base 88 mm)   |    | matt white  | 28,57  |
| <b>canopy with outlet on one or both sides</b><br>for all surface-mounted versions,<br>H 15 mm, ø 88 mm  |    | shiny chrome<br>glossy white<br>matt chrome<br>matt white<br>matt black | 55,46  |
| <b>mirror assembly kit</b><br>for mounting the luminaires io pico directly<br>on a mirror, (drilling diameter 70 mm)<br>no possibility of revision of the power supply<br>via mirrors  |    |   | 43,70  |
| <b>cavity box</b><br>for mounting of flat luminaires<br>in hollow ceilings and -walls  |    |   | 3,36   |
| <b>Occhio air module</b><br>Bluetooth 4.0 dim module for<br>phase-cut dimmable spotlights and power supply units,<br>mounting in cavity or switch box,<br>max. 4 x 32 W (with Occhio converter,<br>other converters max. 52 W),<br>L 40 mm x W 36 mm x H 14 mm |   |   | 82,35  |
| <b>Occhio air adapter</b><br>for lui volto/alto v<br>adapter ring incl. »air« module,<br>mounting under luminaire,<br>ø 95 mm, H 10 mm   |  | matt white<br>matt black  | 110,92 |
| for lui 3d<br>adapter ring incl. »air« module,<br>mounting under luminaire,<br>ø 88 mm, H 14 mm  |  | matt white<br>matt black  | 110,92 |
| <b>color filter</b><br>for zoom optic  | filter red<br>filter green<br>filter blue<br>filter yellow<br>filter magenta        |   | 30,25  |

Can be configured at **Occhio Digital Order System (DOS)**

## lui spotlights mounting options
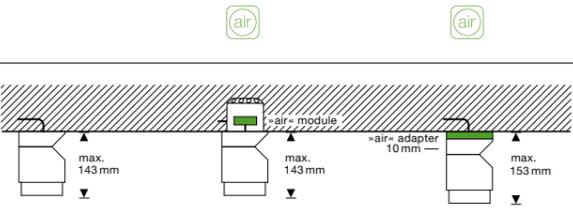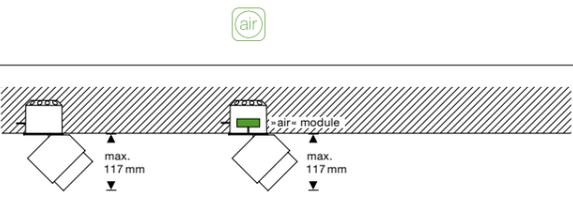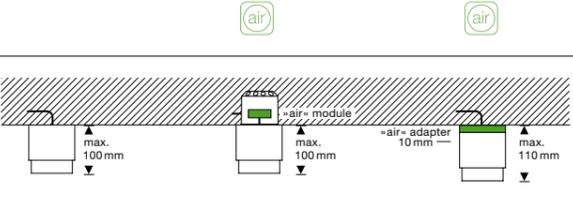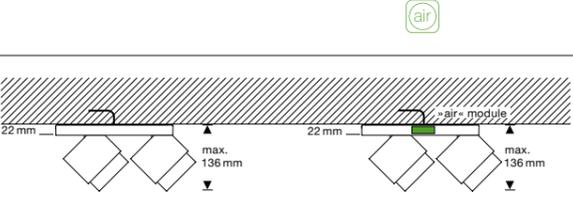
|   |   |   |   |
|---|---|---|---|
| <b>volto</b><br>head ø 94 mm, H 143 mm (zoom), H 131 mm (lens)  |    | solid wall with<br>230 V power supply,<br>through-wiring possible |    |
| 90° swivel range<br>360° rotatable  |   |   |   |
| <b>alto</b><br>head ø 94 mm, H 117 mm (zoom), H 105 mm (lens)   |    | solid wall with<br>230 V power supply,<br>through-wiring possible |    |
| 45° swivel range<br>360° rotatable  |   |   |   |
| <b>alto v</b><br>ø 94 mm, H 100 mm (zoom), H 82 mm (lens)   |  | solid wall with<br>230 V power supply,<br>through-wiring possible |   |
| non rotatable   |   |   |   |
| <b>alto doppio</b><br>head ø 94 mm, H 136 mm (zoom), H 125 mm (lens)<br>base L 240 mm x W 85 mm x H 22 mm |  | solid wall with<br>230 V power supply,<br>through-wiring possible |  |
| 45° swivel range<br>360° rotatable  |   |   |   |
| <b>alto track</b><br>head ø 94 mm, H 118 mm (zoom), H 108 mm (lens)                                       |  | 3-phase track, only for<br>Eutrac, Erco and<br>Zumtobel tracks    |  |
| 55° swivel range<br>360° rotatable  |   |   |   |

# lui spotlights piano mounting options


**piano edge**  
head ø94 mm, H99 mm (zoom), H85 mm (lens)




45° swivel range  
360° rotatable

 optional with Occhio air


**edge mounting tube**

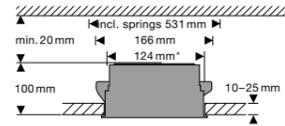

hollow ceiling

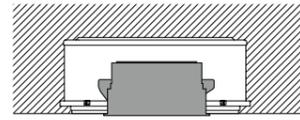

concrete ceiling  
(Kaiser HaloX 250 with mineral-fibre board)  
power supply max. L 210 mm x H 30 mm



ceiling edge


**piano v edge**  
head ø94 mm, H99 mm (zoom), H85 mm (lens)




non rotatable

 optional with Occhio air


**edge mounting tube**

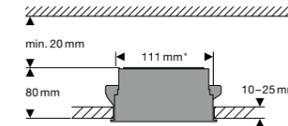

hollow ceiling

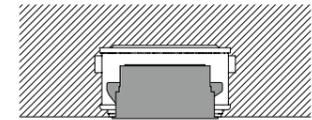

concrete ceiling  
(Kaiser HaloX 180 with mineral-fibre board)  
power supply max. L 130 mm x H 30 mm



ceiling edge

**piano cover**  
head ø94 mm, H99 mm (zoom), H85 mm (lens)




round


square

 optional with Occhio air


**mounting tube with cover**

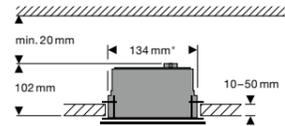

hollow ceiling

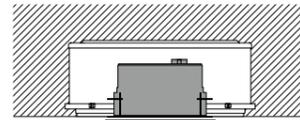

concrete ceiling  
(Kaiser HaloX 250 with mineral-fibre board)  
power supply max. L 210 mm x H 30 mm



cover

**piano v cover**  
head ø94 mm, H99 mm (zoom), H85 mm (lens)




round

square


non rotatable

 optional with Occhio air


**mounting tube with cover**

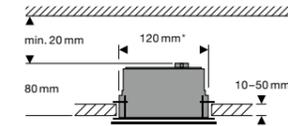

hollow ceiling

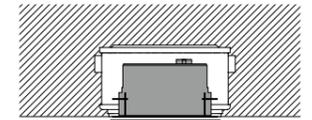


concrete ceiling  
(Kaiser HaloX 180 with mineral-fibre board)  
power supply max. L 130 mm x H 30 mm



cover


**piano pure**  
head ø94 mm, H99 mm (zoom), H85 mm (lens)

as pro version (=constant current=)  
remote power supply (optional)

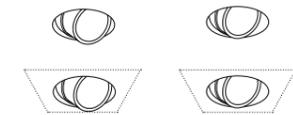


 optional with Occhio air

**mounting board for seamless mounting**

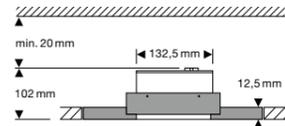


hollow ceiling  
(fibre cement board with holding ring)

**flush-mount ring for seamless**

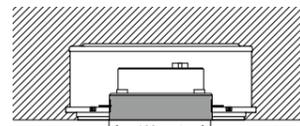

concrete ceiling plastered, no fair-faced concrete  
(Kaiser HaloX 250 with mineral-fibre board)  
power supply max. L 210 mm x H 30 mm



**piano v pure**  
head ø94 mm, H99 mm (zoom), H85 mm (lens)


as pro version (=constant current=)  
remote power supply (optional)




non swivable

 optional with Occhio air

**mounting board for seamless mounting**

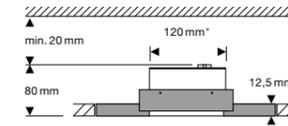

hollow ceiling  
(fibre cement board with holding ring)



\*cut-out dimension

## lui spotlights lighting effects

| head   | zoom  | lens   |
|--|---|--|
|  | continuously adjustable light cone              | fixed light cone with insight lens (changeable)            |
|  zoom   | zoom 20°–60°<br>soft edge glass<br>+ zoom optic |  |
|  C 80   |   | 80°/clear glass<br>+ small lens medium<br>+ lens optic     |
|  C 60 |   | 60°/clear glass<br>+ small lens high<br>+ lens optic       |
|  S 80 |   | 80°/soft edge glass<br>+ small lens medium<br>+ lens optic |
|  S 60 |   | 60°/soft edge glass<br>+ small lens high<br>+ lens optic   |
|  S 40 |   | 40°/Fresnel-lens<br>+ small lens medium<br>+ lens optic    |
|  S 30 |   | 30°/Fresnel-lens<br>+ small lens high<br>+ lens optic      |

lui spotlights with these lighting effects are configurable at **Occhio Digital Order System (DOS)**

## lui spotlights technical data and control



Occhio VOLT light engine

|                         |     |                |
|-------------------------|-----|----------------|
| connection              | U   | 230 V AC/50 Hz |
| average service life    | t   | > 40.000 h     |
| energy-efficiency class | EEK | G              |

|                       |     |                        |
|-----------------------|-----|------------------------|
| <b>LED</b>            |     |                        |
| color temperature     | T   | 2700 K, 3000 K         |
| Color Rendering Index | CRI | Ra 97                  |
| recommended use       |     | residential and public |

| power<br>luminous flux luminaire | P<br>φ | perfect color |        |
|----------------------------------|--------|---------------|--------|
|                                  |        | 13W           | 18W    |
| zoom                             |        | 420 lm        | 560 lm |
| lens                             | C 80   | 530 lm        | 720 lm |
|                                  | C 60   | 530 lm        | 720 lm |
|                                  | S 80   | 530 lm        | 720 lm |
|                                  | S 60   | 530 lm        | 720 lm |
|                                  | S 40   | 450 lm        | 600 lm |
|                                  | S 30   | 470 lm        | 630 lm |

control

Occhio air  
powered by  
Casambi

lui spotlights VOLT Leuchten are dimmable via trailing-edge phase cut dimmer\*.

 **Occhio air**  
control via Bluetooth – switching, dimming of individual luminaires, groups and scenes.

\*compatible dimmers: [occhio.com/dim](http://occhio.com/dim)

lui 3d  
floor spotlights



zoom continuously adjustable light cone

basso

head and body 360° rotatable  
incl. plug-in power supply

14 cm

version



|               |                       |         |
|---------------|-----------------------|---------|
| 18 W (890 lm) | chrome/colors         | 603,36  |
| 13 W (650 lm) | shiny chrome          |         |
| 18 W (890 lm) | materials             | + 16,81 |
| 18 W (890 lm) | phantom/black phantom | + 25,21 |

zoom

20°–60°/soft edge glass  
+ zoom optic



lens fixed light cone

basso

head and body 360° rotatable  
incl. plug-in power supply

14 cm

version



|                |                       |         |
|----------------|-----------------------|---------|
| 18 W (1100 lm) | chrome/colors         | 584,87  |
| 13 W (740 lm)  | shiny chrome          |         |
| 18 W (1100 lm) | materials             | + 16,81 |
| 18 W (1100 lm) | phantom/black phantom | + 25,21 |

C 80

80°/clear glass + small lens medium  
+ lens optic



|                |                       |         |
|----------------|-----------------------|---------|
| 18 W (1100 lm) | chrome/colors         | 584,87  |
| 13 W (740 lm)  | shiny chrome          |         |
| 18 W (1100 lm) | materials             | + 16,81 |
| 18 W (1100 lm) | phantom/black phantom | + 25,21 |

S 80

80°/soft edge glass + small lens medium  
+ lens optic



|               |                       |         |
|---------------|-----------------------|---------|
| 18 W (910 lm) | chrome/colors         | 584,87  |
| 13 W (660 lm) | shiny chrome          |         |
| 18 W (910 lm) | materials             | + 16,81 |
| 18 W (910 lm) | phantom/black phantom | + 25,21 |

S 40

40°/Fresnel lens + small lens medium  
+ lens optic

control

features

switchable and dimmable at the head via rear slide control

inserts

|                   |                |       |
|-------------------|----------------|-------|
|                   | filter red     | 30,25 |
|                   | filter green   |       |
|                   | filter blue    |       |
|                   | filter yellow  |       |
|                   | filter magenta |       |
| (for zoom optics) |                |       |

options

light source

2700 K or 3000 K, perfect color CRI 97

surfaces

head/optics/body/base

chrome

shiny chrome

matt chrome

colors

matt white

matt black

matt white/matt gold/matt white

matt black/matt gold/matt black

materials/phantom/black phantom

matt black/rose gold/matt black

matt black/bronze/matt black

matt black/phantom/matt black

matt black/black phantom/matt black

The surfaces rose gold, bronze, phantom and black phantom may differ slightly from other product lines.

further options - further lighting effects view page 198

These and further options can be configured at  
Occhio Digital Order System (DOS)

further information - technical data view page 199

# lui 3d

## wall and ceiling luminaires



**zoom** continuously adjustable light cone

**pico**

head and body 360° rotatable

**up/flat**

**version**



|                      |                              |         |
|----------------------|------------------------------|---------|
| <b>18 W</b> (890 lm) | <b>chrome/colors</b>         | 576,47  |
| 13 W (650 lm)        | shiny chrome                 |         |
| <b>18 W</b> (890 lm) | <b>materials</b>             | + 16,81 |
| <b>18 W</b> (890 lm) | <b>phantom/black phantom</b> | + 25,21 |

**zoom**

20°–60°/soft edge glass  
+ zoom optic

can also be configured as pro version and pro power version with **26 W** excl. power supply at Digital Order System (DOS)

**control**

**features**

switchable and dimmable at the head via rear slide control, alternatively dimmable via trailing-edge phase cut dimmer

**Occhio air module**



Bluetooth dimming module, for mounting in hollow ceiling or switch box, for max. 4 spotlights

82,35

**Occhio air adapter**



adapter ring incl. »air« module, mounting under luminaire

110,92

**options**

**light source**

2700 K or 3000 K, perfect color CRI 97

**mounting options**

**up**



with integrated converter for surface mounting, through-wiring possible

**flat**



with flat base for hollow ceiling or switch box, incl. remote converter

**inserts**

|  |                |       |
|--|----------------|-------|
|  | filter red     | 30,25 |
|  | filter green   |       |
|  | filter blue    |       |
|  | filter yellow  |       |
|  | filter magenta |       |

(for zoom optics)

**surfaces**

**head/optics/body/base**

chrome

shiny chrome  
matt chrome



**colors**

matt white  
matt black  
matt white/matt gold/matt white  
matt black/matt gold/matt black



**materials/phantom/black phantom**

matt black/rose gold/matt black  
matt black/bronze/matt black  
matt black/phantom/matt black  
matt black/black phantom/matt black



The surfaces rose gold, bronze, phantom and black phantom may differ slightly from other product lines.

**further options**

- further lighting effects view page 198
- further mounting accessories view page 196
- further accessories for Occhio air from page 226

These and further options can be configured at **Occhio Digital Order System (DOS)**

**further information**

- technical data and information on mounting options view pages 197–199

## lui 3d mounting accessories

### sideways inlet (single- or double-sided)

for all surface-mounted versions,  
H 7 mm,  $\phi$  76 mm ( $\phi$  base 88 mm)



matt white

28,57

### canopy with outlet on one or both sides

for all surface-mounted versions,  
H 15 mm,  $\phi$  88 mm



shiny chrome  
glossy white  
matt chrome  
matt white  
matt black

55,46

### mirror assembly kit

for mounting the luminaires io pico directly  
on a mirror, (drilling diameter 70 mm)  
no possibility of revision of the power supply  
via mirrors



43,70

### cavity box

for mounting of flat luminaires  
in hollow ceilings and -walls



3,36

### Occhio air module

Bluetooth 4.0 dim module for  
phase-cut dimmable spotlights and power supply units,  
mounting in cavity or switch box,  
max. 4 x 32 W (with Occhio converter,  
other converters max. 52 W),  
L 40 mm x W 36 mm x H 14 mm

82,35

### Occhio air adapter

for lui volto/alto v  
adapter ring incl. »air« module,  
mounting under luminaire,  
 $\phi$  95 mm, H 10 mm



matt white  
matt black

110,92

### for lui 3d

adapter ring incl. »air« module,  
mounting under luminaire,  
 $\phi$  88 mm, H 14 mm



matt white  
matt black

110,92

### color filter

for zoom optic


filter red  
filter green  
filter blue  
filter yellow  
filter magenta

30,25

## lui 3d mounting options


### pico up

with integrated power supply for surface  
mounting, suitable for wall mounting  
(outside the hand area),  
through-wiring possible

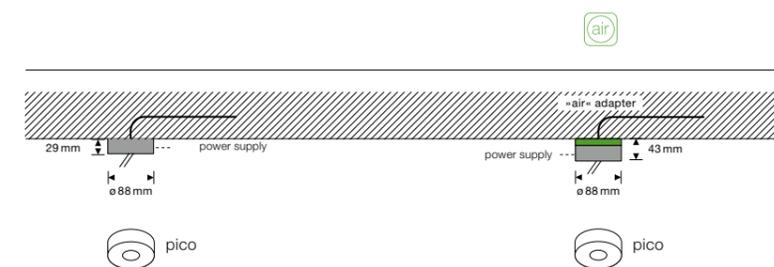

### pico flat

with flat base for cavity box,  
remote power supply  
suitable for wall mounting  
(outside the hand area),  
through-wiring possible

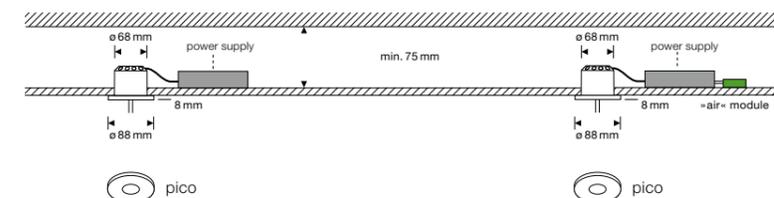

## lui 3d lighting effects

| head  | zoom   | lens   |
|---|--|--|
|   | continuously adjustable light cone           | fixed light cone with insight lens (changeable)            |
|  zoom  | zoom 20°–60°<br>soft edge glass + zoom optic |  |
| <b>contour</b>  |  |  |
|  C80   |  | 80°/clear glass<br>+ small lens medium<br>+ lens optic     |
|  C60 |  | 60°/clear glass<br>+ small lens high<br>+ lens optic       |
| <b>soft</b>   |  |  |
|  S80 |  | 80°/soft edge glass<br>+ small lens medium<br>+ lens optic |
|  S60 |  | 60°/soft edge glass<br>+ small lens high<br>+ lens optic   |
|  S40 |  | 40°/Fresnel-lens<br>+ small lens medium<br>+ lens optic    |
|  S30 |  | 30°/Fresnel-lens<br>+ small lens high<br>+ lens optic      |

lui 3d spotlights with these lighting effects are configurable at **Occhio Digital Order System (DOS)**

## lui 3d technical data and control

version »slide control«

connection U 48V DC (min. 22W)

average service life t > 50.000 h  
energy-efficiency class EEK G

LED  
color temperature T 2700K, 3000K  
Color Rendering Index CRI Ra 97  
recommended use residential and public

| power | luminous flux luminaire | perfect color |        |
|-------|-------------------------|---------------|--------|
|       |                         | 13W           | 18W    |
| zoom  |                         | 650lm         | 890lm  |
| lens  | C80                     | 740lm         | 1010lm |
|       | C60                     | 770lm         | 1040lm |
|       | S80                     | 740lm         | 1010lm |
|       | S60                     | 740lm         | 1010lm |
|       | S40                     | 660lm         | 910lm  |
|       | S30                     | 690lm         | 940lm  |

control

with Occhio power supply

The Occhio power supply is perfectly matched to these requirements and can be dimmed by trailing-edge phase cut dimmer\*. Not in connection with dimming function or slight control or Occhio air.

Occhio air  
powered by  
Casambi

 **Occhio air**  
control via Bluetooth – switching, dimming of individual luminaires, groups and scenes.

dim function lui luminaire heads




lui 3d luminaires are switchable and dimmable at the head via rear slight control.  
For external dimming or for use with Occhio air, set the slight control to »100«.

\*compatible dimmers: [occhio.com/dim](http://occhio.com/dim)

M series

lei

The first shade luminaire with changeable characteristics.

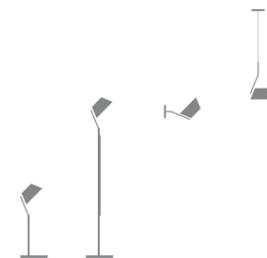


**lei 3d**  
table and floor luminaires



tavolo

40 cm

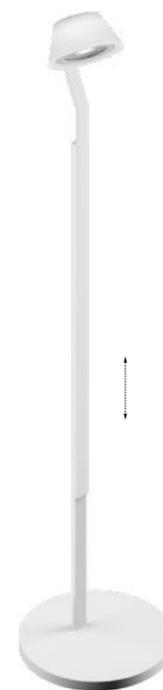

lettura

120–150 cm  
height adjustable

head and body 360° rotatable  
incl. plug-in power supply

**version**



9W (610lm)

**colors**

630,25

**materials**

+16,81

**phantom**

+26,89

1.089,08

+16,81

+26,89

**iris** for flexible setting of direct and ambient light proportions

**control**

**features**

switchable and dimmable via sensor button on the rear side of the head

**options**

**light source**

2700K or 3000K, perfect color CRI97

**surfaces**

**iris + cover/body/base**

**chrome**

shiny chrome  
matt chrome  
glossy white/shiny chrome/glossy white



**colors**

matt white  
matt black  
matt gold/matt white  
matt gold/matt black



**materials/phantom/black phantom**

rose gold/matt black  
bronze/matt black  
phantom/matt black  
black phantom/black matt



head matt white/translucent

The surfaces rose gold, bronze, phantom and black phantom may differ slightly from other product lines.

**further information**

- technical data view page 208

**lei 3d**  
wall and suspended luminaires



parete

sospeso

|  |   |   |  |                              |  |   |   |  |        |
|--|---|---|--|------------------------------|--|---|---|--|--------|
| head and body 360° rotatable   |   | <b>15 cm, up/flat</b>   |  | head and body 360° rotatable |  | <b>fix, up/flat</b><br>cable length adjustable during mounting, 80–180 cm                 |   | <b>variable, up/flat</b><br>continuous height adjustment 50–200 cm   |        |
| <b>version</b>   |  <b>9W</b> (610lm)   | <b>colors</b>   | 532,77   | <b>materials</b>             | +16,81   | <b>phantom</b>  | +26,89  | 623,53   | 892,44 |
| <b>iris</b> for flexible setting of direct and ambient light proportions |   |   |  |                              |  |   |   | ☉ special length up to 1000 cm possible (extra charge per head: +142,86, non discountable)<br>longer version, fix (180–280 cm) configurable (with surcharge) |        |
| <b>control</b>   | <b>features</b><br>switchable and dimmable via sensor button on the rear side of the head (can be deactivated), alternatively dimmable via trailing-edge phase cut dimmer | <b>Occhio air module</b> <br>Bluetooth dimmer module, mounting in hollow ceiling or switch box, for max. 4 spotlights<br>82,35 | <b>Occhio air adapter</b> <br>adapter ring incl. »air« module, mounting under surface-mounted spacing box<br>110,92 |                              |  |   |   |  |        |
| <b>options</b>   | <b>light source</b><br>2700 K or 3000 K, perfect color CRI97  | <b>mounting variations</b><br><b>up</b> <br>with integrated converter for surface mounting, through-wiring possible            | <b>flat</b> <br>with flat base for hollow ceiling with hollow ceiling box incl. remote converter                    | <b>surfaces</b>              | <b>iris + cover/body/base</b><br>chrome<br>shiny chrome<br>matt chrome<br>glossy white/shiny chrome/glossy white | <b>colors</b><br>matt white<br>matt black<br>matt gold/matt white<br>matt gold/matt black | <b>materials/phantom/black phantom</b><br>rose gold/matt black<br>bronze/matt black<br>phantom/matt black<br>black phantom/black matt | head matt white/translucent<br>The surfaces rose gold, bronze, phantom and black phantom may differ slightly from other product lines.                       |        |
| <b>further options</b>   | - further mounting accessories view page 206<br>- further accessories for Occhio air from page 226  |   | These and further options can be configured at <b>Occhio Digital Order System (DOS)</b>  |                              | <b>further information</b>   | - technical data, information on control and mounting options view pages 207–208          |   |  |        |

## lei/lei 3d mounting accessories

### sideways inlet (single- or double-sided)

for all surface-mounted versions,  
H 7 mm, ø 76 mm (ø base 88 mm)



matt white

28,57

### canopy with outlet on one or both sides

for all surface-mounted versions,  
H 15 mm, ø 88 mm



chrome  
glossy white  
matt chrome  
matt white  
matt black

55,46

### cable redirection

for sospeso  
H 18 mm, ø 15 mm



chrome  
matt chrome  
matt white  
matt black

35,29

### cavity box

for mounting of flat luminaires  
in hollow ceilings and -walls



3,36

### Occhio air module

Bluetooth 4.0 dim module for  
phase-cut dimmable luminaires and power supplies,  
mounting in cavity or switch box,  
max. 4 x 32 W (with Occhio converter,  
other converters max. 52 W),  
L 40 mm x W 36 mm x H 14 mm

82,35

### Occhio air adapter

adapter ring incl. »air« module  
for all surface-mounted versions,  
mounting under luminaire,  
ø 88 mm, H 14 mm


matt white  
matt black

110,92

## lei 3d mounting options


### up

with integrated power supply for  
surface mounting, through-wiring possible

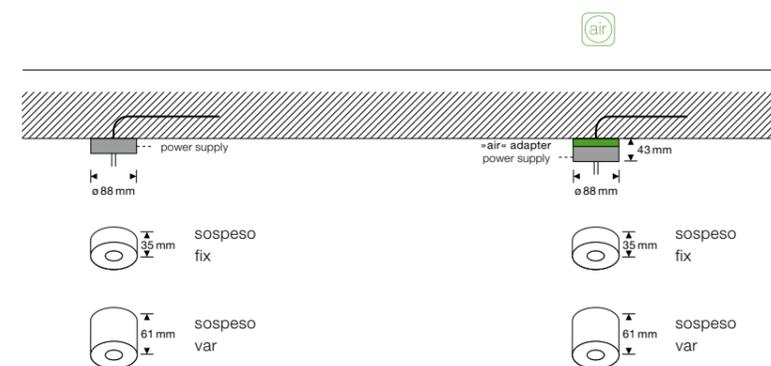

### flat

with flat base for cavity box,  
remote power supply

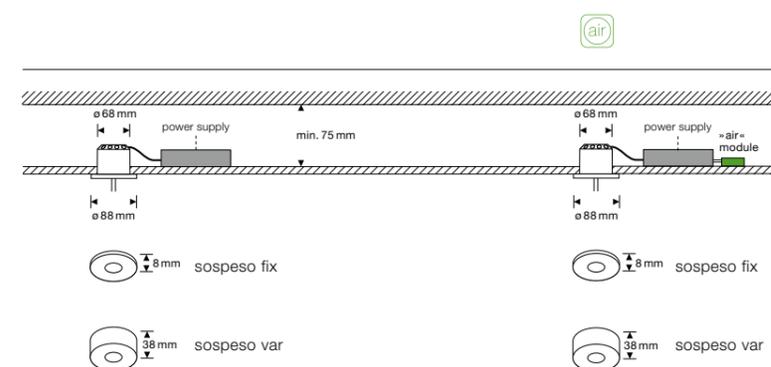

## lei 3d technical data and control

### version »touch control«

|                         |     |            |
|-------------------------|-----|------------|
| connection              | U   | 230 V AC   |
| average service life    | t   | > 50.000 h |
| energy efficiency class | EEK | G          |

|                       |     |                        |
|-----------------------|-----|------------------------|
| <b>LED</b>            |     | <b>perfect color</b>   |
| color temperature     | T   | 2700 K, 3000 K, 4000 K |
| Color Rendering Index | CRI | Ra 97                  |
| recommended use       |     | residential and public |

|                                |   |                      |
|--------------------------------|---|----------------------|
| <b>power</b>                   | P | <b>perfect color</b> |
| <b>luminous flux luminaire</b> | φ | <b>9 W</b>           |
| iris                           |   | 610 lm               |

### control

#### with Occhio power supply

The Occhio power supply is perfectly matched to these requirements and can be dimmed by trailing-edge phase cut dimmer\*. Can not be used in conjunction with »touchless control« or Occhio air.

*Occhio air  
powered by  
Casambi*

 **Occhio air**  
control via Bluetooth – switching, dimming of individual luminaires, groups and scenes.

### dimming lei heads

**SENSOR OFF**  
luminaires are dimmed using remote trailing-edge phase cut dimmers\*  
(except for floor and table luminaires) or controlled with Occhio air (optional)  
(switching, dimming).

sensor  
on  off


**SENSOR ON**  
luminaires can be controlled by sensor button on head  
(switching, dimming) – cannot be combined with Occhio air.

\* compatible dimmers: [occhio.com/dim](http://occhio.com/dim)

E series

# Sito

Spherical and sensual, Sito adds high-quality accents. Whether on the building itself, on terraces, on paths or in the garden: Sito offers unique design and quality of light for holistic lighting concepts in outdoor spaces.



# Sito

bollard and floor luminaires



with spherical glass  
light output 90°–45°

basso

with flat glass

R basso

light output 45°

palo

360° rotatable  
pivotable

360° rotatable  
pivotable

65 cm  
head 45° swivelable

## versions

**18 W** (1100 lm)

830,25

805,04

**C 80**  
80°

**18 W** (980 lm)

845,38

820,17

**S 80**  
80°  
soft edge

**18 W** (870 lm)

853,78

828,57

**S 40**  
40°  
Fresnel lens

## versions

**18 W** (1100 lm)

922,69

**C 80**  
80°

**18 W** (980 lm)

937,82

**S 80**  
80°  
soft edge

**18 W** (870 lm)

946,22

**S 40**  
40°  
Fresnel lens

## control

### features

**230 V light engine 18 W**  
dimable via trailing-edge phase cut dimmer

### Occhio air module

Bluetooth trailing-edge phase cut dimmer for up to 4 luminaires to be installed in a suitable place in a water-protected housing (plastic)  
82,35

**dust-tight and jet-proof**  
(IP 65)

## options

### lightsource

2700 K or 3000 K, perfect color CRI97

### earth anchor

for potting  
in concrete

60,50

### earth spike

mounting in loose  
ground (only Sito basso)

31,93

## surfaces

### head/body + base colors

matt white  
matt black  
glossy white / matt white

**further options** - further mounting accessories view page 218

These and further options can be configured at  
**Occhio Digital Order System (DOS)**

**further information** - technical data, information on control  
and mounting options view pages 220–222



verticale



vertical light output

versions



2x9W (1100lm)

838,66

C 80  
80°



2x9W (980lm)

853,78

S 80  
80°  
soft edge

control

features



230V light engine 18W  
dimnable via trailing-edge phase cut dimmer

Occhio air module 

Bluetooth trailing-edge phase cut dimmer for up to 4 luminaires  
to be installed in a suitable place in a water-protected housing (plastic)  
82,35

options

lightsource

2700K or 3000K, perfect color CRI97



giù



vertical light output

versions



9W (550lm)

652,10

C 80  
80°



9W (490lm)

667,23

S 80  
80°  
soft edge



dust-tight and jet-proof  
(IP 65)

surfaces

head colors

matt white   
matt black   
glossy white 

further information


- technical data, information on control  
and mounting options view pages 220-222

# Sito

ceiling and wall luminaires



giro



lato

light output 90°–45°

360° rotatable  
45° pivotable

versions



**18 W** (1100lm)

744,54

**C 80**  
80°



**18 W** (980lm)

759,66

**S 80**  
80°  
soft edge



**18 W** (870lm)

768,07

**S 40**  
40°  
Fresnel lens

control

features



**230 V light engine 18 W**  
dimmable via trailing-edge phase cut dimmer

Occhio air module 

Bluetooth trailing-edge phase cut dimmer for up to 4 luminaires  
to be installed in a suitable place in a water-protected housing (plastic)  
82,35

versions



**18 W** (1100lm)

652,10

**C 80**  
80°



**18 W** (980lm)

667,23

**S 80**  
80°  
soft edge



**18 W** (870lm)

675,63

**S 40**  
40°  
Fresnel lens



**dust-tight and jet-proof**  
(IP 65)

options

lightsource

2700 K or 3000 K, perfect color CRI 97

surfaces

head colors

matt white   
matt black   
glossy white 

further information

- technical data, information on control  
and mounting options view pages 220–222

## Sito mounting options

---

### ground anchor

for potting in concrete,  
Sito palo and Sito basso

height: 400 mm  
diameter: 95 mm



60,50

---

### earth spike

mounting in loose ground  
(e. g. earth, gravel),  
Sito basso

height: 267 mm  
diameter: 60 mm



31,93

Can be configured at **Occhio Digital Order System (DOS)**

# Sito mounting options

**basso**  
head: ø 130 mm, H 124 mm




45° swivel range  
360° rotatable




Occhio air module optional


solid floor with 230 V connection

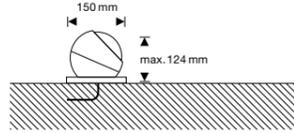


optional: ground anchor for potting in concrete

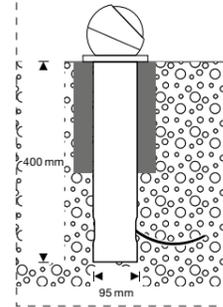

optional: earth spike mounting in loose ground

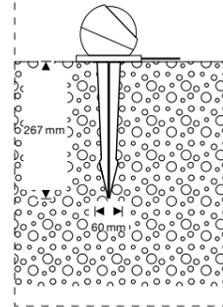

**palo**  
head: ø 130 mm, H 650 mm




head je 45° rotatable




Occhio air module optional

solid floor with 230 V connection

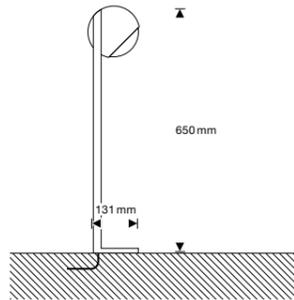

optional: ground anchor for potting in concrete

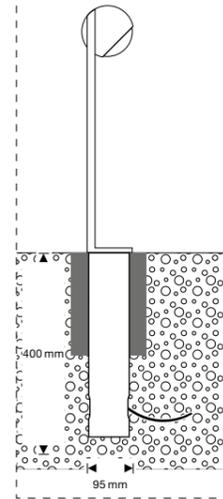


**verticale**  
head: ø 130 mm, L 113 mm



Occhio air module optional

solid wall with 230 V connection

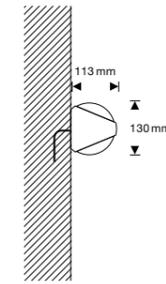


**giù**  
head: ø 130 mm, L 113 mm



Occhio air module optional

solid wall with 230 V connection

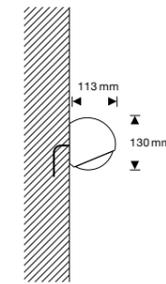

**giro**  
head: ø 130 mm, L 110 mm




45° swivel range  
360° rotatable



Occhio air module optional

solid ceiling with 230 V connection

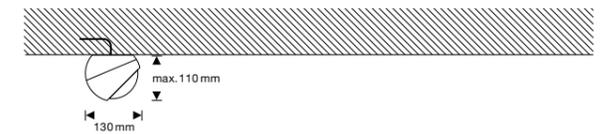


**lato**  
head: ø 130 mm, L 99 mm



Occhio air module optional

solid wall with 230 V connection

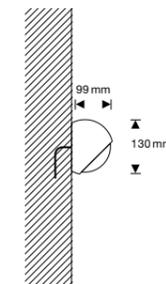

## Sito technical data and control



Occhio VOLT light engine

|                         |     |                                  |
|-------------------------|-----|----------------------------------|
| connection              | U   | 230V AC/50Hz                     |
| average service life    | t   | >40.000h                         |
| energy efficiency class | EEK | G                                |
| safety class            |     | IP 65 (dust-tight and jet proof) |

|                       |     |                                    |
|-----------------------|-----|------------------------------------|
| LED                   |     | <b>perfect color</b>               |
| color temperature     | T   | 2700K, 3000K                       |
| Color Rendering Index | CRI | Ra 97                              |
| recommended use       |     | outdoor area for living and object |

|                         |      | P | perfect color |        |        |
|-------------------------|------|---|---------------|--------|--------|
|                         |      |   | 9W            | 2 x 9W | 18W    |
| power                   |      |   |               |        |        |
| luminous flux luminaire |      | φ |               |        |        |
| Sito                    |      |   |               |        |        |
| verticale               | C 80 |   |               | 1100lm |        |
|                         | S 80 |   |               | 980lm  |        |
| gio                     | C 80 |   | 550lm         |        |        |
|                         | S 80 |   | 490lm         |        |        |
| lato, giro,             | C 80 |   |               |        | 1100lm |
| basso, palo             | S 80 |   |               |        | 980lm  |
|                         | S 40 |   |               |        | 870lm  |

### control

**Sito luminaires** can be dimmed via trailing-edge phase cut\*.  
List of compatible dimmer see below [occhio.com/dim](http://occhio.com/dim).



**Occhio air**  
control via Bluetooth – switching, dimming of individual luminaires, groups and scenes.

Occhio air  
powered by  
Casambi

\*compatible dimmers: [occhio.com/dim](http://occhio.com/dim)

# Occhio air

The new simplicity of staging. Whether switching, dimming, »fading« or creating complete light scenarios and group luminaires – with Occhio air light can now be controlled via Bluetooth.



# Occhio air

## Occhio air controller

|   |   |  |        |
|---|---|--|--------|
| <p><b>for all luminaires</b><br/>Bluetooth 4.0. remote control for Occhio air, set up via the Occhio air app.<br/>L 80 mm x W 80 mm x H 12 mm</p> |  | <p>matt white/glossy white<br/>matt black/glossy black<br/>matt white/matt chrome<br/>matt black/matt chrome</p> | 208,40 |
|---|---|--|--------|

## wall mount for Occhio air controller

|   |   |                                  |       |
|---|---|----------------------------------|-------|
| <p><b>for all luminaires</b><br/>mounting via self-adhesive tape, screws or installed on wall box</p> |  | <p>matt white<br/>matt black</p> | 26,89 |
|---|---|----------------------------------|-------|

## Occhio air app


|  |   |                |
|--|---|----------------|
| <p><b>for all luminaires</b><br/>app for operating Occhio air, requires iOS 8.2, Android 4.4 or later, available in the App Store or Google Play Store</p> |  | free of charge |
|--|---|----------------|

## Mito »air« box

|   |   |           |       |
|---|---|-----------|-------|
| <p><b>for Mito/Mito linear</b><br/>Bluetooth control integrated into cover/canopy, features controllable via Occhio air app or »air« controller (optional), no external dimming</p> |  | surcharge | 82,35 |
|---|---|-----------|-------|

|                                    |  |           |        |
|------------------------------------|--|-----------|--------|
| <p><b>for Mito sospeso due</b></p> |  | surcharge | 164,71 |
|------------------------------------|--|-----------|--------|

## Sento »air« head

|  |   |           |       |
|--|---|-----------|-------|
| <p><b>for Sento/Sento sospeso</b><br/>Bluetooth control integrated into the luminaire head, features controllable via Occhio air app or »air« controller (optional), no external dimming</p> |  | surcharge | 82,35 |
|--|---|-----------|-------|

## Occhio air module

|  |   |  |       |
|--|---|--|-------|
| <p><b>for Più, io spotlights, io 3d, lui spotlights, lui 3d, lei 3d</b><br/>Bluetooth 4.0 dimming module for phase-cut dimmable spotlights and ballasts, mounting in cavity box or wall switch box max. 4 x 32 W<br/>L 40 mm x W 36 mm x H 14 mm</p> |  |  | 82,35 |
|--|---|--|-------|

## Occhio air adapter

|   |   |                                  |        |
|---|---|----------------------------------|--------|
| <p><b>for Più alto 3d, io 3d, lui 3d, lei 3d</b><br/>adapter ring incl. »air« module, mounting under surface-mounted spacing box<br/>ø 88 mm, H 14 mm</p> |  | <p>matt white<br/>matt black</p> | 110,92 |
|---|---|----------------------------------|--------|

|   |   |                                  |        |
|---|---|----------------------------------|--------|
| <p><b>for Più alto</b><br/>adapter ring incl. »air« module, mounting under surface-mounted spacing box<br/>ø 83 mm, H 14 mm</p> |  | <p>matt white<br/>matt black</p> | 110,92 |
|---|---|----------------------------------|--------|

|   |   |                                  |        |
|---|---|----------------------------------|--------|
| <p><b>for Più alto v</b><br/>adapter ring incl. »air« module, mounting under surface-mounted spacing box<br/>ø 83 mm, H 14 mm</p> |  | <p>matt white<br/>matt black</p> | 110,92 |
|---|---|----------------------------------|--------|

|  |   |                                  |        |
|--|---|----------------------------------|--------|
| <p><b>for lui volto, lui alto v</b><br/>adapter ring incl. »air« module, mounting under surface-mounted spacing box<br/>ø 95 mm, H 10 mm</p> |  | <p>matt white<br/>matt black</p> | 110,92 |
|--|---|----------------------------------|--------|

|  |   |                                  |        |
|--|---|----------------------------------|--------|
| <p><b>for io verticale</b><br/>adapter ring incl. »air« module, mounting under luminaire,<br/>ø 82 mm, H 14 mm</p> |  | <p>matt white<br/>matt black</p> | 110,92 |
|--|---|----------------------------------|--------|

|  |   |                                  |        |
|--|---|----------------------------------|--------|
| <p><b>for io giro, io alto v</b><br/>adapter ring incl. »air« module, mounting under luminaire,<br/>ø 77 mm, H 10 mm</p> |  | <p>matt white<br/>matt black</p> | 110,92 |
|--|---|----------------------------------|--------|

|   |   |                                  |        |
|---|---|----------------------------------|--------|
| <p><b>for io giro doppio</b><br/>adapter ring incl. »air« module, mounting under luminaire,<br/>L 196 mm x W 51 mm x H 7 mm</p> |  | <p>matt white<br/>matt black</p> | 110,92 |
|---|---|----------------------------------|--------|

Notes



# Occhio

Occhio GmbH  
Wiener Platz 7  
81667 München  
Germany  
Fon +49-89-44 77 86 80  
Fax +49-89-44 77 86 39  
info@occhio.com

[occhio.com](http://occhio.com)

**price overview**

**English (Euro excl. VAT)**

2023|06

Subject to errors and technical change.

All prices are recommended retail

prices by Occhio GmbH.

Product overview valid until further notice.