

Occhio

price overview
2025|09

culture of light

series	system		
Luna		Luna pura	6-7
		Luna basso/Luna sogno	12-13
		Luna sospeso/Luna sospeso cloud	14-21
		Luna parete	22-23
		Luna scura	24-25
		Luna piena	26-27
X		Mito raggio/Mito largo	38-39
		Mito sospeso/Mito sospeso move	40-45
		Mito cosmo	46-47
		Mito aura/Mito aura alta	48-51
		Mito soffitto	52-53
		Mito sfera	54-55
		Mito raggio lusso/Mito largo lusso	68-71
		Mito sospeso lusso	72-75
		Mito aura lusso	76-79
		Mito soffitto lusso	80-85
		Mito terra	88-91
		Mito volo	92-99
		Mito alto	100-103
		Mito alto side	104-107
		Gioia	118-119
		Taglio	124-125
L		Sento	130-141
		Sento sospeso	148-151
		Più/Più R	158-173
M		io spotlights	186-193
		io 3d	200-203
		lui spotlights	210-219
		lui 3d	226-229
		lei 3d	236-239
E		Sito	246-251
C		Occhio air	260-261

Luna

Mito

Edizione Lusso

Mito linear

Gioia Taglio

Sento

Più

io

lui

lei

Sito

Occhio air

Luna series

Luna pura

Luna pura – beyond candlelight

Luna pura is the first cordless luminaire from Occhio. It allows you to experience the magical power of luna anywhere – anytime.

Its innovative features go far beyond the usual.



Luna

wireless luminaires



pura

height 19,4 cm
base ø 87,5 mm
head ø 125 mm, 7 W (160 lm)



tablelight

705,88

control

features

Dimming and »color tune« via Occhio air
and touch control on the luminaire

accessories



Luna pura charging-accessories
(1,8 m USB-C cable, charging-Puk
and power plug)

+ 99,16

Occhio air (inclusive)



Bluetooth control, features controllable via
Occhio air app or »air« controller (optional),
synchronization of multiple luminaires via Occhio air

light source

Occhio fireball technology

high color LED CRI 92
2200 K–3500 K »x-tra warm«

surfaces

body/base/sphere

dark chrome
phantom



gold



the surfaces have a high gloss finish.

further options

These options can be configured at
Occhio Digital Order System (DOS)

further information

technical data, information on control
view pages 8–9

Luna pura technical data

version »color tune«			
connection & charging technology		USB-C PD 3.0 45 W / DC 5-20 V max. 3 A	
battery service life		up to 8 h at maximum brightness up to 150 h at minimum brightness (battery changeable through Occhio-Service)	
charging speed	t	0–80 % in approx. 1 h (corresponds to 6 h at max. brightness)	
LED color temperature Color Rendering Index recommended use	T CRI	x-tra warm 2200–3500 K Ra 92 residential	
power (LED) luminous flux luminaire	P φ	7 W	
pura tablelight		160 lm	

Luna pura control


version (»color tune«)		Luna pura can be dimmed via haptic pushbuttons or via Occhio air (inclusive) and the color temperature is continuously adjustable.	
»touchless control« / Occhio air / phase cut dimming (switchable at power supply)		 Occhio air (standard) Bluetooth control via Occhio air app or »air« controller (optional), control of individual luminaires, groups and scenes.	
		pura »air« + touch control, control via haptic pushbuttons and Occhio air app or »air« controller, switching, dimming, »color tune« (color temperature continuously adjustable) synchronization of multiple luminaires via Occhio air possible	

Occhio air
powered by
Casambi

Luna series

Luna

Light from another world. Luna combines classic design with innovative technology from Occhio – and takes the lighting experience to a whole new level. Magical. Stylish. Playful.

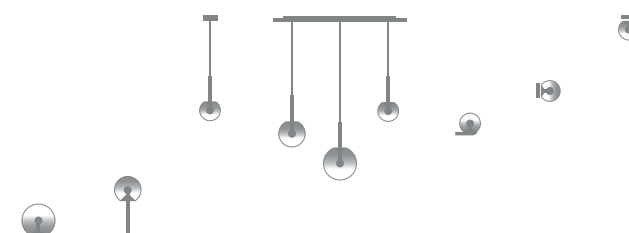



basso

height 20 cm
head ø 200 mm, 9 W (400 lm)



uplight

1.247,06



sogno

height 37 cm
head ø 160 mm, 9 W (approx. 200 lm)



tablelight

1.280,67

control		features		Occhio air (inclusive) 	
		»color tune«, switch- and dimmable via »touchless control« (can be deactivated) and Occhio air (inclusive)		Bluetooth control integrated in luminaire head, features controllable via Occhio air app or »air« controller (optional)	
light source	Occhio fireball technology			surfaces	body/base/sphere
	high color LED CRI 95				
	 2200 K–3500 K »x-tra warm« + 50,42				
			dark chrome  phantom 		
			the surfaces have a high gloss finish. There may be slight differences in the surface finish when combining different sizes.		
further options	These options can be configured at Occhio Digital Order System (DOS)			further information	technical data, information on control view pages 34–35

Luna

suspended luminaires

sospeso fix

sospeso variable

Luna



125 fix up

160 fix up

200 fix up

125 var up

160 var up

200 var up

fix pendant length adjustable during mounting 50–200 cm	for surface-mounted installation incl. power supply textile cable black head ø 125 mm, 9 W (550 lm)	for surface-mounted installation incl. power supply textile cable black head ø 160 mm, 9 W (550 lm)	for surface-mounted installation incl. power supply textile cable black head ø 200 mm, 9 W (550 lm)	variable continuous height adjustment 50–200 cm	for surface-mounted installation incl. power supply cable transparent head ø 125 mm, 9 W (550 lm)	for surface-mounted installation incl. power supply cable transparent head ø 160 mm, 9 W (550 lm)	for surface-mounted installation incl. power supply textile cable black head ø 200 mm, 9 W (550 lm)
---	--	--	--	--	--	--	--



downlight

870,59

974,79

1.115,97

1.164,71

1.268,91

1.410,08

control	features »color tune«, switch- and dimmable »touchless control« (can be deactivated) and Occhio air, alternatively dimmable via trailing edge phase-cut dimmer (Occhio air can be deactivated via ballast)			Occhio air (inclusive)  Bluetooth control integrated in luminaire head, features controllable via Occhio air app or »air« controller (optional)		
light source	Occhio fireball technology high color LED CRI 95 2700 K–4000 K  2200 K–3500 K »x-tra warm« + 50,42			surfaces	body/base/sphere dark chrome  phantom  the surfaces have a high gloss finish. There may be slight differences in the surface finish when combining different sizes.	
further options	These options can be configured at Occhio Digital Order System (DOS)			further information	technical data, information on control and on mounting options view pages 28–35	


Luna

suspended luminaires

sospeso fix

sospeso variable

Luna

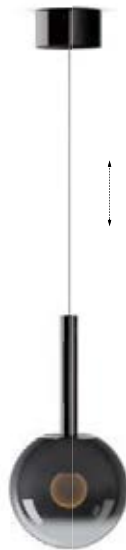

125 fix flat

160 fix flat

200 fix flat

125 var flat

160 var flat

200 var flat

fix pendant length adjustable during mounting max. 350 cm	for hollow ceiling incl. external power supply textile cable black head ø 125 mm, 9 W (550 lm)	for hollow ceiling incl. external power supply textile cable black head ø 160 mm, 9 W (550 lm)	for hollow ceiling incl. external power supply textile cable black head ø 200 mm, 9 W (550 lm)	variable continuous height adjustment 50–200 cm	for hollow ceiling incl. external power supply cable transparent head ø 125 mm, 9 W (550 lm)	for hollow ceiling incl. external power supply cable transparent head ø 160 mm, 9 W (550 lm)	for hollow ceiling incl. external power supply cable transparent head ø 200 mm, 9 W (550 lm)
---	---	---	---	--	---	---	---



downlight

870,59

974,79

1.115,97

1.164,71

1.268,91

1.410,08

control	features »color tune«, switch- and dimmable »touchless control« (can be deactivated) and Occhio air, alternatively dimmable via trailing edge phase-cut dimmer (Occhio air can be deactivated via ballast)	Occhio air (inclusive)  Bluetooth control integrated in luminaire head, features controllable via Occhio air app or »air« controller (optional)
----------------	--	---

light source	Occhio fireball technology high color LED CRI95 2700 K–4000 K  2200 K–3500 K »x-tra warm« + 50,42	surfaces	body/base/sphere dark chrome  phantom  the surfaces have a high gloss finish. There may be slight differences in the surface finish when combining different sizes.
---------------------	--	-----------------	--

further options	 can also be configured as pro version excl. power supply at Digital Order System (DOS) . Special lengths up to 1000 cm possible for pro version.	further information	technical data, information on control and on mounting options view pages 28–35
------------------------	---	----------------------------	--

Luna

suspended luminaires

sospeso fix

Luna



125 fix pure

160 fix pure

200 fix pure

fix pendant length adjustable during mounting max. 350 cm				
	for hollow ceiling incl. external power supply, mounting of the power supply via inspection hatch textile cable black head ø125 mm, 9 W (550 lm)	for hollow ceiling incl. external power supply, mounting of the power supply via inspection hatch textile cable black head ø160 mm, 9 W (550 lm)		for hollow ceiling incl. external power supply, mounting of the power supply via inspection hatch textile cable black head ø200 mm, 9 W (550 lm)
 downlight	801,68	905,88	1.047,06	
control	features »color tune«, switch- and dimmable »touchless control« (can be deactivated) and Occhio air, alternatively dimmable via trailing edge phase-cut dimmer (Occhio air can be deactivated via ballast)			Occhio air (inclusive)  Bluetooth control integrated in luminaire head, features controllable via Occhio air app or »air« controller (optional)
light source	Occhio fireball technology high color LED CRI95 2700 K–4000 K 2200 K–3500 K »x-tra warm« + 50,42			surfaces body/base/sphere dark chrome phantom  the surfaces have a high gloss finish. There may be slight differences in the surface finish when combining different sizes.
further options	can also be configured as pro version excl. power supply at Digital Order System (DOS). Special lengths up to 1000 cm possible for pro version.			further information technical data, information on control and on mounting options view pages 28–35

Luna

suspended luminaires

sospeso cloud

Luna



cloud 3



cloud 5



cloud 3 L



cloud 5 L

fix pendant length adjustable during mounting option 1: 20–170 cm option 2: 120–270 cm	for surface mounting, power supply integrated in ceiling canopy, textile cable black heads: 1 × head ø125 mm 1 × head ø160 mm 1 × head ø200 mm other combinations configurable ceiling canopy: ø40 cm, height 4 cm 3 × 9 W (3 × 550 lm)	for surface mounting, power supply integrated in ceiling canopy, textile cable black heads: 2 × head ø125 mm 2 × head ø160 mm 1 × head ø200 mm other combinations configurable ceiling canopy: ø50 cm, height 4 cm 5 × 9 W (5 × 550 lm)	for surface mounting, power supply integrated in ceiling canopy, textile cable black heads: 1 × head ø125 mm 1 × head ø160 mm 1 × head ø200 mm other combinations configurable ceiling canopy: lenght: 80 cm, width: 22 cm, height 3 cm 3 × 9 W (3 × 550 lm)	for surface mounting, power supply integrated in ceiling canopy, textile cable black heads: 2 × head ø125 mm 2 × head ø160 mm 1 × head ø200 mm other combinations configurable ceiling canopy: lenght: 140 cm, width: 22 cm, height 3 cm 5 × 9 W (5 × 550 lm)
--	--	--	---	--



downlight

3.260,50

4.941,18

3.344,54

5.025,21

control	features »color tune«, switch- and dimmable via »touchless control« (can be deactivated) and Occhio air	Synchronization 📶 synchronous gesture control of the heads via »air« sync	Occhio air (inclusive)  Bluetooth control integrated in luminaire head, features controllable via Occhio air app or »air« controller (optional)
----------------	--	---	--

light source	Occhio fireball technology high color LED CRI95 2700 K–4000 K  2200 K–3500 K »x-tra warm« Surprise price Surprise price + 50,42	surfaces	body/base/sphere dark chrome  phantom  the surfaces have a high gloss finish. There may be slight differences in the surface finish when combining different sizes.	Baldachin matt white  matt black 
---------------------	---	-----------------	--	--

further options	These options can be configured at Occhio Digital Order System (DOS)	further information	technical data, information on control and on mounting options view pages 30–35
------------------------	--	----------------------------	--



parete

for surface mounting without wall box,
incl. power supply
head ø125 mm, 9 W (550 lm)



parete cover

for surface mounting with flush-mounted or cavity box,
not in combination with wall light socket (wall bracket)
incl. power supply
head ø125 mm, 9 W (550 lm)



uplight

862,18

905,88

control

features

»color tune«, switch- and dimmable via Occhio air,
alternatively dimmable via trailing edge phase-cut dimmer
(Occhio air can be deactivated via ballast)

Occhio air (inclusive)



Bluetooth control integrated in luminaire head, features controllable via
Occhio air app or »air« controller (optional)

light source

Occhio fireball technology

high color LED CRI95

2700 K–4000 K

☒ 2200 K–3500 K »x-tra warm«
+ 50,42

surfaces

body/base/sphere

dark chrome
phantom



the surfaces have a high gloss finish.
There may be slight differences in the surface finish when combining different sizes.

further options



can also be configured as pro version excl.
power supply at **Digital Order System (DOS)**

further information

technical data, information on control
and on mounting options view pages 32–35

Luna
wall luminaires
scura 125



flat

for hollow wall
incl. external power supply
head ø 125 mm, 9 W (approx. 200 lm)



up

for surface-mounted installation
incl. power supply
head ø 125 mm, 9 W (approx. 200 lm)



backlight

747,90

747,90

scura 160



flat

for hollow wall
incl. external power supply
head ø 160 mm, 9 W (approx. 200 lm)



up

for surface-mounted installation
incl. power supply
head ø 160 mm, 9 W (approx. 200 lm)

853,78

853,78

scura 200



flat

for hollow wall
incl. external power supply
head ø 200 mm, 9 W (approx. 200 lm)



up

for surface-mounted installation
incl. power supply
head ø 200 mm, 9 W (approx. 200 lm)



backlight

993,28

993,28

control

features

»color tune«, switch- and dimmable via Occhio air,
alternatively dimmable via trailing edge phase-cut dimmer
(Occhio air can be deactivated via ballast)

Occhio air (inclusive)



Bluetooth control integrated in luminaire head, features controllable via
Occhio air app or »air« controller (optional)

light source

Occhio fireball technology

high color LED CRI 95

2700 K–4000 K

2200 K–3500 K »x-tra warm«
+ 50,42

surfaces

body/base/sphere

dark chrome
phantom



the surfaces have a high gloss finish.
There may be slight differences in the surface finish when combining different sizes.

further options



can also be configured as pro version excl.
power supply at **Digital Order System (DOS)**

further information

technical data, information on control
and on mounting options view pages 33–35

Luna
ceiling luminaire
piena 125



flat

up

for hollow ceiling
incl. external power supply
head ø 125 mm, 9 W (550 lm)

for surface-mounted installation
incl. power supply
head ø 125 mm, 9 W (550 lm)



downlight

747,90

747,90

piena 160



flat

up

for hollow ceiling
incl. external power supply
head ø 160 mm, 9 W (550 lm)

for surface-mounted installation
incl. power supply
head ø 160 mm, 9 W (550 lm)

853,78

853,78

piena 200



flat

up

for hollow ceiling
incl. external power supply
head ø 200 mm, 9 W (550 lm)

for surface-mounted installation
incl. power supply
head ø 200 mm, 9 W (550 lm)



downlight

993,28

993,28

control

features

»color tune«, switch- and dimmable via Occhio air,
alternatively dimmable via trailing edge phase-cut dimmer
(Occhio air can be deactivated via ballast)

Occhio air (inclusive)



Bluetooth control integrated in luminaire head, features controllable via
Occhio air app or »air« controller (optional)

light source

Occhio fireball technology

high color LED CRI 95

2700 K–4000 K

2200 K–3500 K »x-tra warm«

+ 50,42

surfaces

body/base/sphere

dark chrome
phantom



the surfaces have a high gloss finish.
There may be slight differences in the surface finish when combining different sizes.

further options



can also be configured as pro version excl.
power supply at Digital Order System (DOS)

further information


technical data, information on control
and on mounting options view pages 33–35

Luna sospeso mounting options

head: ø125 mm, ø160 mm, ø200 mm


up
for surface mounting with integrated power supply,
through-wiring possible.
Mounting on cavity box possible.

Ⓢ synchronization of multiple luminaires via
»air« sync possible

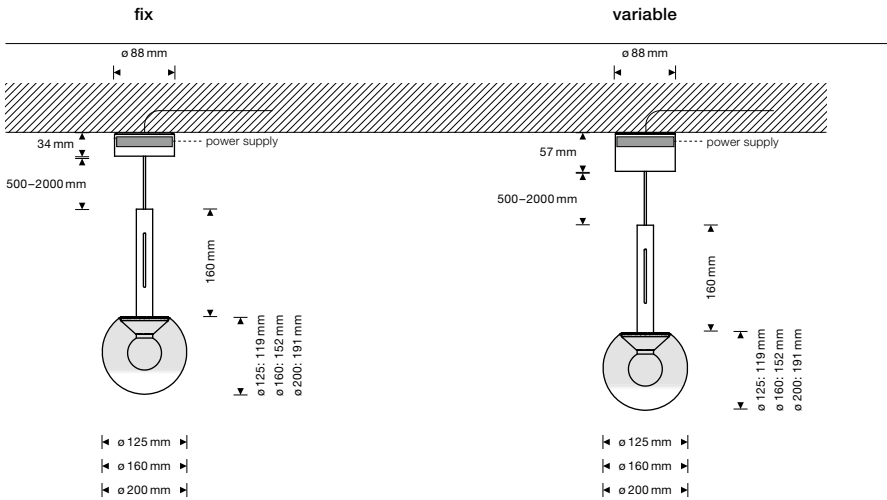


pure
for installation in hollow ceiling,
external power supply,
mounting of power supply via inspection hatch.

Ⓢ synchronization of multiple luminaires via
»air« sync possible

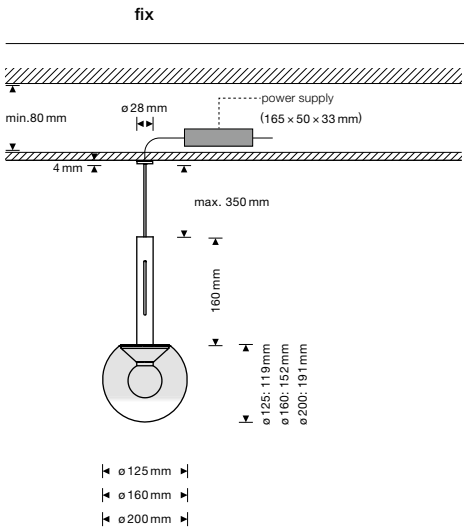

flat
with a flat base for hollow ceiling mounting,
external power supply, through-wiring possible.
Mounting on cavity box possible.

Ⓢ synchronization of multiple luminaires via
»air« sync possible

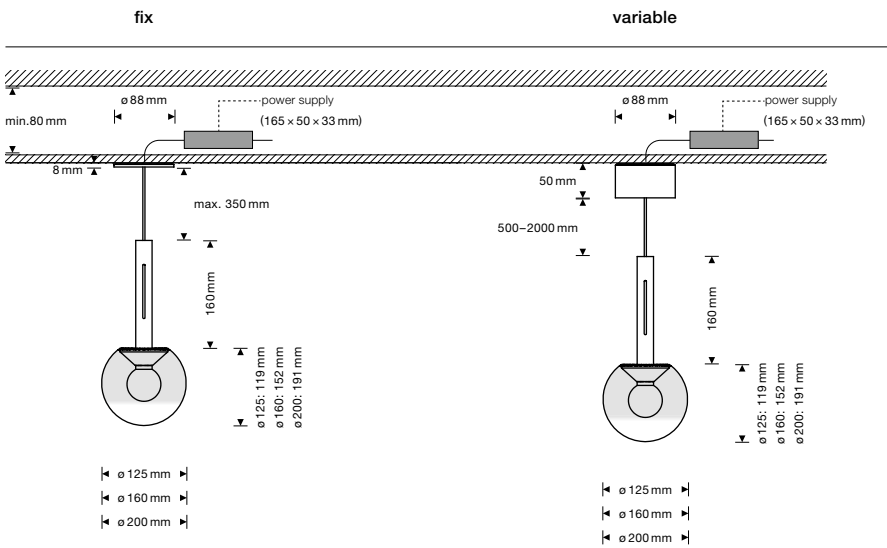


Luna sospeso cloud mounting options

head: ø125 mm, ø160 mm, ø200 mm


cloud
for surface mounting with integrated power supply,
through-wiring possible.

☞ synchronous gesture control
of the heads via »air« sync

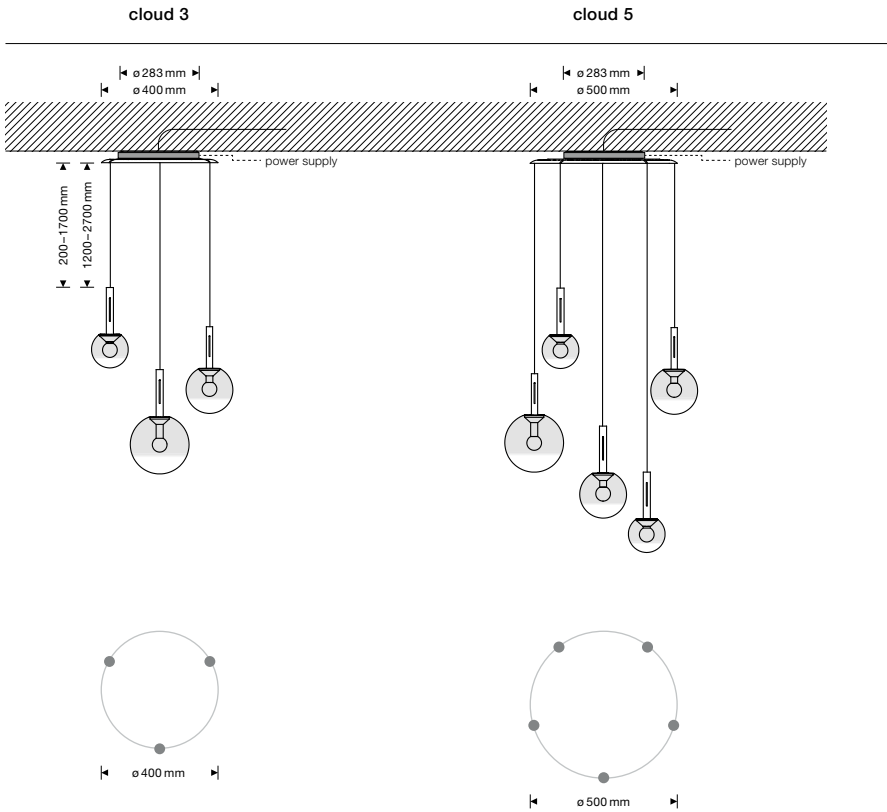

cloud L
for surface mounting with integrated power supply,
through-wiring possible.

☞ synchronous gesture control
of the heads via »air« sync

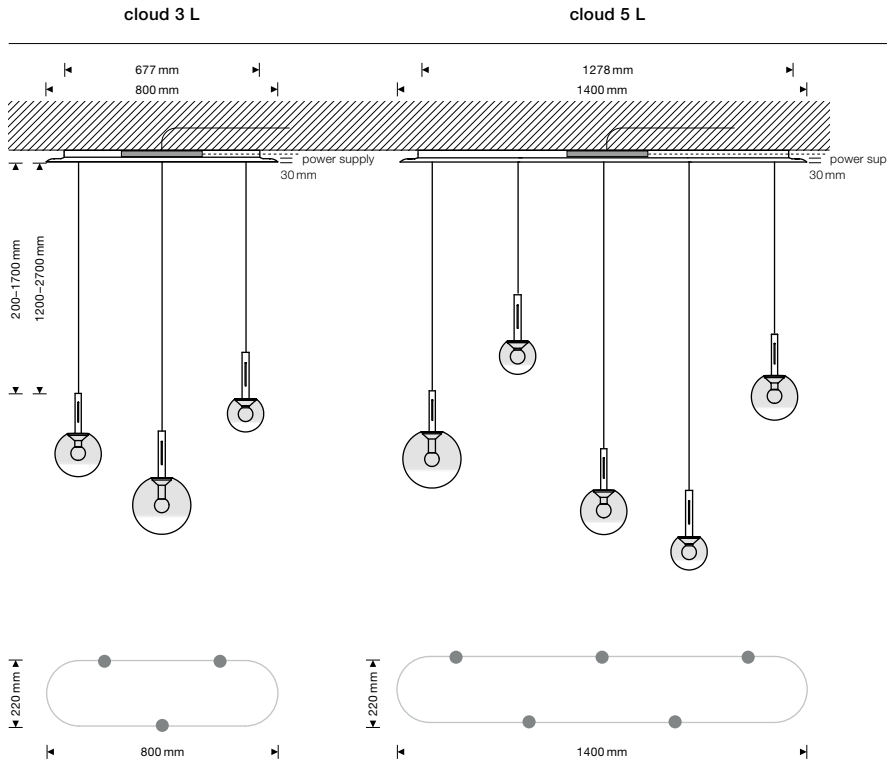


Luna parete mounting options

head: ø 125 mm


parete
for surface mounting with integrated power supply,
through-wiring possible.

Ⓢ synchronization of multiple luminaires via
»air« sync possible

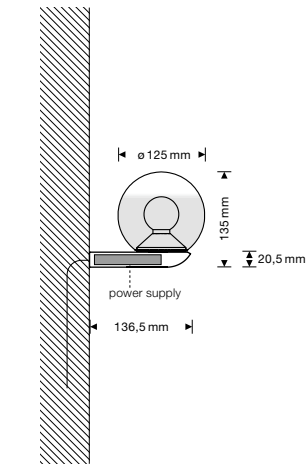

parete cover
for surface mounting with flush-mounted or cavity box.
Not in combination with wall light socket (wall bracket)
with integrated power supply and cover for cavity box,
through-wiring possible.

Ⓢ synchronization of multiple luminaires via
»air« sync possible

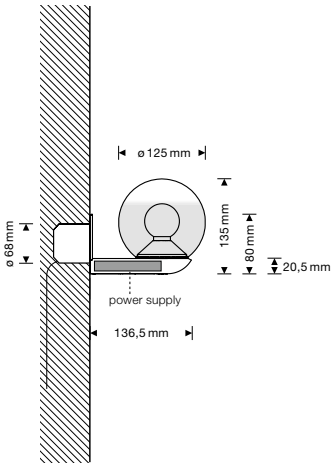


Luna scura/piena mounting options

head: ø 125 mm, ø 160 mm, ø 200 mm


up
for surface mounting with integrated power supply,
through-wiring possible.
Mounting on cavity box possible.

Ⓢ synchronization of multiple luminaires via
»air« sync possible

scura

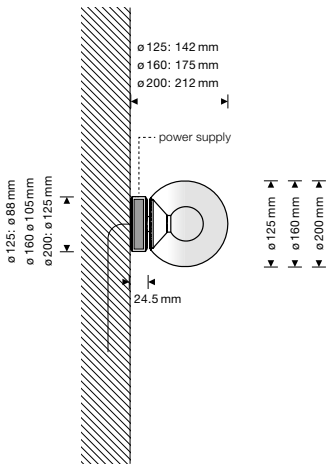


piena

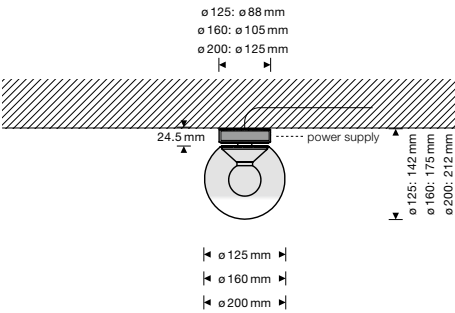


flat
with a flat base for hollow ceiling mounting,
external power supply, through-wiring possible.
Mounting on cavity box possible.

Ⓢ synchronization of multiple luminaires via
»air« sync possible

scura

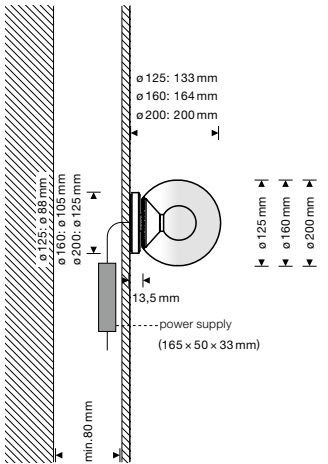


piena

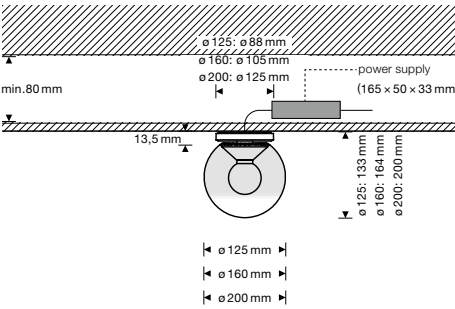


version »color tune«	connection	U	230 V AC				
		W	basso	– 13 W			
				sogno	– 13 W		
				parete	– 13 W		
				scura	– 13 W		
				piena	– 13 W		
				sospeso	– 13 W		
				sospeso cloud 3	– 39 W		
				sospeso cloud 5	– 65 W		
	average service life	t	> 50.000 h				
EEK		G					
		IP 20					
LED	T	CRI	high color				
			2700–4000 K				
			Ra 95				
			residential and public				
power (LED)	P	9 W	3 x 9 W	5 x 9 W			
	φ						
basso							
uplight		400 lm					
sogno							
tablelight		ca. 200 lm					
parete							
uplight		550 lm					
scura							
backlight		ca. 200 lm					
piena							
downlight		550 lm					
sospeso							
sospeso single		550 lm					
downlight							
sospeso cloud 3			3 x 550 lm				
downlight							
sospeso cloud 5				5 x 550 lm			
downlight							

version (»color tune«)


»touchless control« / Occhio air / phase cut dimming (switchable at power supply)

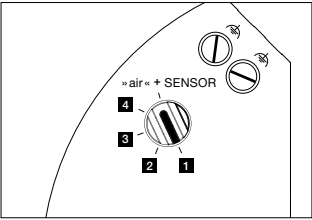


1. sospeso/piena/scura up

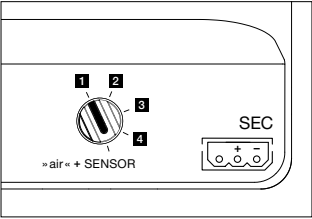

2. sospeso/piena/scura flat/sospeso pure

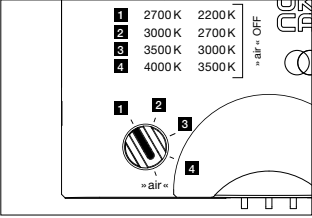

3. parete

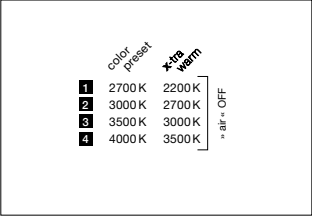

4. Possible, adjustable colour temperatures according to the selected configuration (colour preset or »x-tra warm«). touchless control and Occhio air are deactivated, trailing edge phase-cut dimming possible.

Occhio air powered by Casambi

Luna luminaires can be dimmed via »touchless control« (basso, sogno, sospeso and sospeso cloud) and Occhio air (standard for all Luna luminaires). Alternatively, dimming is possible via trailing edge phase-cut dimmer (Occhio air can be deactivated via power supply, not for basso, sogno and sospeso cloud).

 **Occhio air** (standard)
Bluetooth control via Occhio air app or »air« controller (optional), control of individual luminaires, groups and scenes.

sospeso up (1.)
sospeso flat / pure (2.)

switch position: »air« + SENSOR
»air« + »touchless control« (Bluetooth and gesture control), control via »touchless control« and Occhio air app or »air« controller, switching, dimming, »color tune« (color temperature continuously adjustable), no external dimming possible, control and sensors can be deactivated via Occhio air app

switch position: 1 2 3 4 = »air« OFF
adjustable color temperature according to selected configuration (4 steps, see 4.), trailing-edge phase cut dimming possible, Occhio air deactivated

switch position: »air« + SENSOR
»air« (Bluetooth control), control via Occhio air app or »air« controller, switching, dimming, »color tune« (color temperature continuously adjustable), no external dimming possible, no gesture control for piena and scura

switch position: 1 2 3 4 = »air« OFF
adjustable color temperature according to selected configuration (4 steps, see 4.), trailing-edge phase cut dimming possible, Occhio air deactivated

sospeso cloud

»air« + »touchless control« (Bluetooth and gesture control), control via »touchless control« and Occhio air app or »air« controller, switching, dimming, »color tune« (color temperature continuously adjustable according to selected configuration), no external dimming possible, control and sensors can be deactivated via Occhio air app

basso/sogno

»air« + »touchless control« (Bluetooth and gesture control), control via »touchless control« and Occhio air app or »air« controller, switching, dimming, »color tune« (color temperature continuously adjustable according to selected configuration), control and sensors can be deactivated via Occhio air app

parete (3.)

switch position: »air«
control via Occhio air app or »air« controller, switching, dimming, »color tune« (color temperature continuously adjustable), no external dimming possible

switch position: 1 2 3 4 = »air« OFF
adjustable color temperature according to selected configuration (4 steps, see 4.), trailing-edge phase cut dimming possible, Occhio air deactivated

piena/scura up (1.)
piena/scura flat (2.)


switch position: »air« + SENSOR
»air« (Bluetooth control), control via Occhio air app or »air« controller, switching, dimming, »color tune« (color temperature continuously adjustable), no external dimming possible, no gesture control for piena and scura

switch position: 1 2 3 4 = »air« OFF
adjustable color temperature according to selected configuration (4 steps, see 4.), trailing-edge phase cut dimming possible, Occhio air deactivated

X series

Mito

The myth of light. Sensual, mythical, aesthetic –
Mito is the perfect symbiosis of design, innovation
and the highest quality of light.

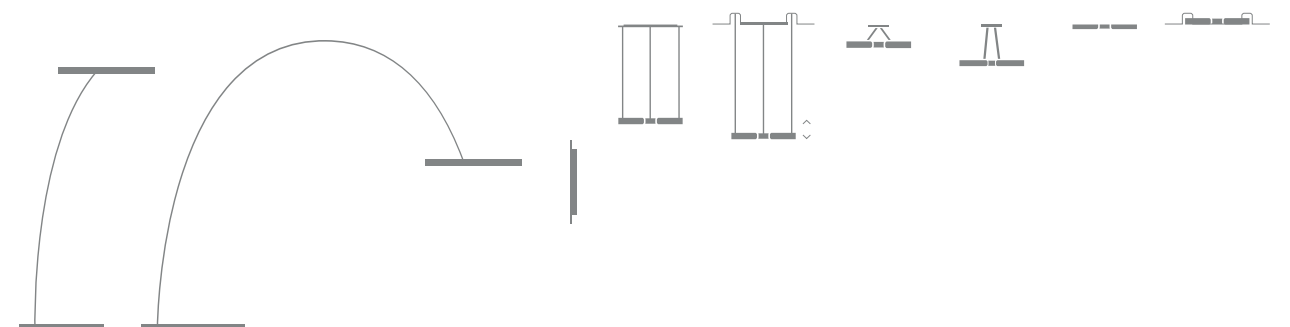

Mito

arc luminaires



raggio

height 205 cm
ø head 60 cm, 60 W (3330 lm)

Ⓢ can be synced via Occhio air

colors	4.184,87
materials	+386,55
phantom/black phantom	+579,83

control	features	Occhio air 
	»color tune«, »up/down fading«, switch- and dimmable via »touchless control«, »body sensor« (only raggio), and Occhio air (included)	Bluetooth control integrated in power supply. Features via Occhio air app or »air« controller (optional) controllable, no external dimming

options	light source	lighting effects	surfaces	head/body+base colors	materials/phantom/black phantom
	high color LED CRI95 2700 K–4000 K  2200 K–3500 K »x-tra warm« + 126,05	 flood  wide		matt white/matt white matt black/matt black matt silver/matt black matt gold/matt white matt gold/matt black 	rose gold/matt black bronze/matt black phantom/matt black black phantom/matt black 
				The surfaces rose gold, bronze, phantom and black phantom may differ slightly from other product lines.	

further options	- accessories for Occhio air from page 260	These and further options can be configured at Occhio Digital Order System (DOS)	further information	- technical data and information on control view pages 64–65
-----------------	--	---	---------------------	--

Mito

suspended luminaires

sospeso 40



flat



pure



up



due

fix pendant length adjustable during mounting, max. 350 cm	fix for hollow ceiling ø 40 cm, 40 W (2220 lm) incl. remote converter	fix flush ceiling-mounted installation in hollow ceiling, incl. mounting board ø 40 cm, 40 W (2220 lm) incl. converter	variable	fix for surface-mounted installation ø 40 cm, 40 W (2220 lm) through-wiring possible	variable	fix for surface-mounted installation ø 40 cm, 2 × 40 W (2 × 2220 lm) through-wiring possible	variable
variable continuous height adjustment 50–200 cm	 can be synced via Occhio air	 can be synced via Occhio air		 can be synced via Occhio air		 can be synced via Occhio air	
colors	1.810,08	2.588,24	2.984,87	2.073,95	2.470,59	4.442,02	5.235,29
materials	+252,10			+252,10		+504,20	
phantom/black phantom	+378,15			+378,15		+756,30	
	 special lengths up to 500 cm possible (surcharge per head +319,33, discountable)			 special lengths up to 500 cm possible (surcharge per head +319,33, discountable)			

sospeso 60



flat



pure



up



due

fix pendant length adjustable during mounting, max. 350 cm	fix for hollow ceiling ø 60 cm, 60 W (3330 lm) incl. remote converter	fix flush ceiling-mounted installation in hollow ceiling, incl. mounting board ø 60 cm, 60 W (3330 lm) incl. converter	variable	fix for surface-mounted installation ø 60 cm, 60 W (3330 lm) through-wiring possible	variable	fix for surface-mounted installation ø 60 cm, 2 × 60 W (2 × 3330 lm) through-wiring possible	variable
variable continuous height adjustment 50–200 cm	 can be synced via Occhio air	 can be synced via Occhio air		 can be synced via Occhio air		 can be synced via Occhio air	
colors	2.455,46	3.500,84	3.907,56	2.853,78	3.260,50	6.068,08	6.904,20
materials	+386,55			+386,55		+773,11	
phantom/black phantom	+579,83			+579,83		+1.159,66	
	 special lengths up to 500 cm possible (surcharge per head +319,33, discountable)			 special lengths up to 500 cm possible (surcharge per head +319,33, discountable)			

control	features »color tune«, »up/down fading«, switch- and continuously dimmable via »touchless control« (can be deactivated) and Occhio air (optional)	Mito set box features adjustable via »touchless control« (no external dimming). Alternative: color temperature 2700 K/3000 K/3500 K/4000 K and »up/down fading« adjustable, dimmable via trailing-edge phase cut dimmer (not for »x-tra warm«)	Mito »air« box  Bluetooth control integrated in cover/canopy. Features via Occhio air app or »air« controller (optional) controllable (no external dimming)	Mito DALI box version for building control system via DALI (no »touchless control«)
			+ 82,35	+ 82,35

options	light source high color LED CRI95 2700 K–4000 K with set, »air« or DALI box  2200 K–3500 K »x-tra warm« only with »air« or DALI box surcharge per head ø 40 +84,03 ø 60 +126,05	lighting effects room  diffuse  narrow table  flood  wide	surfaces	head colors matt white  matt black  matt silver  matt gold  materials/phantom/black phantom rose gold  bronze  phantom  black phantom  *canopy in matt black (surcharge per head ø 40 + 134,45; ø 60 + 201,68; flat Version 67,23)  The surfaces rose gold, bronze, phantom and black phantom may differ slightly from other product lines.	canopy matt white  matt black* 
----------------	---	--	-----------------	---	--

further options	- accessories for Occhio air from page 260	These and further options can be configured at Occhio Digital Order System (DOS)	further information	- technical data, information on control and mounting options view pages 56–65
------------------------	--	---	----------------------------	--

Mito

suspended luminaires

sospeso move 40



move up




move pure

	»magic move« electrical height adjustment 50–200 cm for surface-mounted installation incl. power supply ø 40 cm, 40 W (2220 lm) through-wiring possible 📶 can be synced via Occhio air	»magic move« electrical height adjustment 50–200 cm for flush ceiling-mounted installation incl. mounting board and power supply ø 40 cm, 40 W (2220 lm) through-wiring possible 📶 can be synced via Occhio air
colors	3.344,54	3.858,82
materials	+252,10	
phantom/black phantom	+378,15	

sospeso move 60



move up



move pure

	»magic move« electrical height adjustment 50–200 cm for surface-mounted installation incl. power supply ø 60 cm, 60 W (3330 lm) through-wiring possible 📶 can be synced via Occhio air	»magic move« electrical height adjustment 50–200 cm for flush ceiling-mounted installation incl. mounting board and power supply ø 60 cm, 60 W (3330 lm) through-wiring possible 📶 can be synced via Occhio air
colors	4.100,84	4.747,90
materials	+386,55	
phantom/black phantom	+579,83	

control	features »magic move«, »color tune«, »up/down fading«, switch- and continuously dimmable via »touchless control« (can be deactivated) and Occhio air (included)			Occhio air (inclusive)  Bluetooth control integrated in canopy, features controllable via Occhio air app or »air« controller (optional) (no external dimming)		
options	light source high color LED CRI95 2700 K–4000 K 2200 K–3500 K »x-tra warm« ø 40 + 84,03 ø 60 + 126,05 lighting effects room  diffuse  narrow table  flood  wide surfaces head colors  matt white  matt black  matt silver  matt gold materials/phantom/black phantom  rose gold  bronze  phantom  black phantom canopy  matt white  matt black* *canopy in matt black (surcharge per head ø 40 + 134,45; ø 60 + 201,68) The surfaces rose gold, bronze, phantom and black phantom may differ slightly from other product lines.					

further options	- accessories for Occhio air from page 260	These and further options can be configured at Occhio Digital Order System (DOS)	further information	- technical data, information on control and mounting options view pages 56–65 - incl. 10 years Occhio magic move warranty, warranty terms: occhio.com/warranty-terms
-----------------	--	---	---------------------	--

Mito

suspended luminaires

cosmo move 40



cosmo move

	»magic move« electrical height adjustment 0–200 cm luminaire can be retracted flush with the ceiling flush ceiling-mounted installation in hollow ceiling incl. mounting board and external power supply ø 40 cm, 40 W (2220 lm) through-wiring possible 🔌 can be synced via Occhio air
--	--

colors	4.016,81
materials	+252,10
phantom/black phantom	+378,15

cosmo move 60



cosmo move

	»magic move« electrical height adjustment 0–200 cm luminaire can be retracted flush with the ceiling flush ceiling-mounted installation in hollow ceiling incl. mounting board and external power supply ø 60 cm, 60 W (3330 lm) through-wiring possible 🔌 can be synced via Occhio air
--	--

colors	4.941,18
materials	+386,55
phantom/black phantom	+579,83

control	features »magic move«, »color tune«, »up/down fading«, switch- and continuously dimmable via »touchless control« (can be deactivated) and Occhio air (included)	Applications glow pure ceiling room table	Occhio air (inclusive)  Bluetooth control integrated in canopy, features controllable via Occhio air app or »air« controller (optional) (no external dimming)
---------	---	--	--

options

light source

high color LED CRI95

2700 K–4000

2200 K–3500 K »x-tra warm«

ø 40 + 84,03

ø 60 + 126,05

lighting effects

room

up: diffuse

down: narrow

table

up: flood

down: wide

surfaces

head colors

matt white

matt black

matt silver

matt gold

materials/phantom/black phantom

rose gold

bronze

phantom

black phantom

light channel

matt white

gold matt

*canopy in matt black (surcharge per head ø 40 + 134,45; ø 60 + 201,68)

The surfaces rose gold, bronze, phantom and black phantom may differ slightly from other product lines.

further options	- accessories for Occhio air from page 260	These and further options can be configured at Occhio Digital Order System (DOS)	further information	- technical data, information on control and mounting options view pages 56–65 - incl. 10 years Occhio magic move warranty, warranty terms: occhio.com/warranty-terms
-----------------	--	--	---------------------	--

Mito

recessed ceiling luminaires

cosmo piano 20



cosmo piano

	flush ceiling-mounted installation in hollow ceiling incl. mounting board and external power supply ø 20 cm, 20 W (850 lm), through-wiring possible
colors	1.294,12
materials	+117,65
phantom/black phantom	+176,47

cosmo piano 60



cosmo piano

	flush ceiling-mounted installation in hollow ceiling incl. mounting board and external power supply ø 60 cm, 60 W (2400 lm), through-wiring possible						
control	features	Applications		Occhio air (inclusive) 			
	»color tune«, »up/down fading«, switch- and continuously dimmable via Occhio air (included)	 glow  pure		Bluetooth control integrated in canopy, features controllable via Occhio air app or »air« controller (optional) (no external dimming)			
options	light source	lighting effects		surfaces	head colors	materials/phantom/black phantom	light channel
	high color LED CRI95 2700 K–4000 K  2200 K–3500 K »x-tra warm« ø 20 +67,23 ø 40 +84,03 ø 60 +126,05	room  up: diffuse down: narrow table  up: flood down: wide			matt white  matt black  matt silver  matt gold 	rose gold  bronze  phantom  black phantom 	matt white  gold matt 
					*canopy in matt black (surcharge per head ø 40 + 134,45; ø 60 + 201,68)  The surfaces rose gold, bronze, phantom and black phantom may differ slightly from other product lines.		
further options	- accessories for Occhio air from page 260	These and further options can be configured at Occhio Digital Order System (DOS)		further information	- technical data, information on control and mounting options view pages 58–65		

Mito

wall and ceiling luminaires

aura 40

aura 60



aura		aura	
for surface-mounted installation, incl. power supply ø 40 cm, H 13,5 cm, 40 W (2310 lm) Ⓢ can be synced via Occhio air		for surface-mounted installation, incl. power supply ø 60 cm, H 13,5 cm, 60 W (3460 lm) Ⓢ can be synced via Occhio air	
colors	1.747,90	2.420,17	
materials	+ 252,10	+ 386,55	
phantom/black phantom	+ 378,15	+ 579,83	
control	features »color tune«, »up/down fading«, switch- and continuously dimmable via »touchless control« (can be deactivated) and Occhio air (optional)	Mito set box features adjustable via »touchless control« (no external dimming). Alternative: color temperature 2700 K/3000 K/3500 K/4000 K and »up/down fading« adjustable, dimmable via trailing-edge phase cut dimmer (not for »x-tra warm«)	Mito »air« box  Bluetooth control integrated in cover/canopy. Features via Occhio air app or »air« controller (optional) controllable (no external dimming) + 82,35
options	light source high color LED CRI95 2700 K–4000 K with set, »air« or DALI box Ⓢ 2200 K–3500 K »x-tra warm« only with »air« or DALI box ø 40 + 84,03 ø 60 + 126,05	lighting effects ceiling diffuse narrow ceiling diffuse wide wall diffuse/wide	surfaces head colors matt white matt black matt silver matt gold materials/phantom/black phantom rose gold bronze phantom black phantom canopy/body matt white matt black
further options	- accessories for Occhio air from page 260	These and further options can be configured at Occhio Digital Order System (DOS)	further information - technical data, information on control and mounting options view pages 60–65

Mito

ceiling luminaires

aura alta 60



aura alta

for surface-mounted installation, incl. power supply ø 60 cm, H 45 cm, 60 W (3460 lm) Ⓢ can be synced via Occhio air					
colors	2.665,55				
materials	+386,55				
phantom/black phantom	+579,83				
control	features	Mito set box	Mito »air« box	Mito DALI box	
	»color tune«, »up/down fading«, switch- and continuously dimmable via Occhio air (optional)	color temperature 2700 K/3000 K/3500 K/4000 K and »up/down fading« adjustable, dimmable via trailing-edge phase cut dimmer (not for »x-tra warm«)	Bluetooth control integrated in cover/canopy. Features via Occhio air app or »air« controller (optional) controllable (no external dimming)	version for building control system via DALI	
			+ 82,35	+ 82,35	
options	light source	lighting effects	surfaces	head colors	canopy/body
	high color LED CRI95 2700 K–4000 K with set, »air« or DALI box	narrow  wide 		matt white matt black matt silver matt gold	matt white matt black
	Ⓢ 2200 K–3500 K »x-tra warm« only with »air« or DALI box + 126,05			rose gold bronze phantom black phantom	
				The surfaces rose gold, bronze, phantom and black phantom may differ slightly from other product lines.	
further options	These and further options can be configured at Occhio Digital Order System (DOS)		further information	- technical data, information on control and mounting options view pages 60–65	

Mito

wall and ceiling luminaires

soffitto 20

							
flat		up		flat		up	
for hollow ceiling ø 20 cm, 20 W (850 lm) incl. remote converter		for surface-mounted installation ø 20 cm, 20 W (850 lm) through-wiring possible		for hollow ceiling ø 40 cm, 40 W (1700 lm) incl. remote converter		for surface-mounted installation ø 40 cm, 40 W (1700 lm) through-wiring possible	
colors materials phantom/black phantom		672,27 +100,84 +151,26		806,72		1.001,68 +151,26 +226,89	

soffitto 60

							
flat		up					
for hollow ceiling ø 60 cm, 60 W (2400 lm) incl. remote converter		for surface-mounted installation ø 60 cm, 60 W (2400 lm) through-wiring possible					
colors materials phantom/black phantom		1.455,46 +235,29 +352,94		1.714,29			
control		features		Mito set box		Mito »air« box 	
		»color tune«, switch- and continuously dimmable via Occhio air (optional)		color temperature 2700 K/3000 K/3500 K/4000 K adjustable, dimmable via trailing-edge phase cut dimmer (not for »x-tra warm«)		Bluetooth control integrated in cover/canopy. Features via Occhio air app or »air« controller (optional) controllable (no external dimming)	
						+ 82,35	
options		light source		lighting effects		surfaces	
		high color LED CRI95					
		2700 K–4000 K with set, »air« or DALI box		ceiling narrow ceiling wide wall to wall wide		head colors materials/phantom/black phantom	
		☉ 2200 K–3500 K »x-tra warm« only with »air« or DALI box ø 20 + 50,42 ø 40 + 67,23 ø 60 + 84,03				matt white matt black matt silver matt gold rose gold bronze phantom black phantom	
						canopy	
						matt white matt black*	
						*canopy in matt black (surcharge per head ø 20 + 67,23; ø 40 + 134,45; ø 60 + 201,68; flat Version + 67,23) ☉ The surfaces rose gold, bronze, phantom and black phantom may differ slightly from other product lines.	
further options		- accessories for Occhio air from page 260		These and further options can be configured at Occhio Digital Order System (DOS)		further information	
						- technical data, information on control and mounting options view pages 61–65	

Mito

mirror luminaires

sfera 40

		
sfera	sfera su	sfera corda
ø 40 cm, 20 W (800 lm) surface-mounted including mirror, including power supply can be synced via Occhio air		
mounting on a mirror, power supply behind the mirror or in recess, incl. power supply can be synced via Occhio air		
surface-mounted including mirror, including power supply and cable (3,5 m) with plug can be synced via Occhio air		
colors	1.378,15	1.467,23
materials	+ 168,07	+ 168,07
phantom/black phantom	+ 252,10	+ 252,10
surcharge mirror grey tinted	+ 67,23	+ 67,23
cable extension (5 m) for power supply unit	+ 31,93	

sfera 60

		
sfera	sfera su	sfera corda
surface-mounted including mirror, including power supply		
🔌 can be synced via Occhio air		
1.899,16	1.620,17	1.988,24
+252,10		+252,10
+378,15		+378,15
+84,03	cable extension (5 m) for power supply unit	+84,03
features		
»color tune«, switch- and continuously dimmable via »touchless control« (can be deactivated) and Occhio air (optional)		
Mito set box		
features adjustable via »touchless control« (no external dimming). Alternative: color temperature 2700 K/3000 K/3500 K/4000 K adjustable in steps, dimmable via trailing-edge phase cut dimmer (not for »x-tra warm«)		
Mito »air« box 		
Bluetooth control system integrated into the power supply canopy, features via Occhio air app.		
+ 82,35		
light source		
high color LED CRI95		
2700 K–4000 K		
with set or »air« box		
🔌 2200 K–3500 K »x-tra warm«		
only with »air« box		
ø 40 + 67,23		
ø 60 + 84,03		
lighting effects		
mirror		
 wide–diffuse		
surfaces		
head		
colors		
matt white		
matt black		
matt silver		
matt gold		
materials/phantom/black phantom		
rose gold		
bronze		
phantom		
black phantom		
cable (sfera corda)		
matt white		
matt black		
matt chrome		
matt gold		
dark grey		
The surfaces rose gold, bronze, phantom and black phantom may differ slightly from other product lines.		
- accessories for Occhio air from page 260		
These and further options can be configured at Occhio Digital Order System (DOS)		
further information		
- technical data, information on control and mounting options view pages 62–65		

Mito sospeso mounting options


sospeso flat

for hollow ceiling mounting with flat cover, remote power supply

- Ⓢ synchronization of multiple luminaires via »air« sync possible (prerequisite all luminaires with »air« and same type)



integrated set box (standard), »air« box optional or DALI box

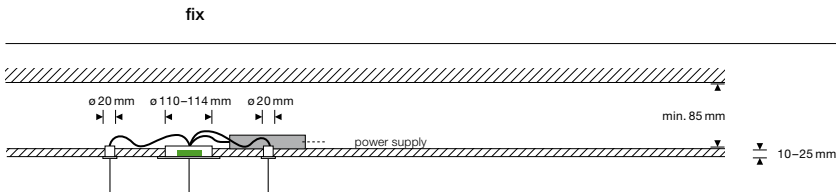


sospeso up

for surface mounting with integrated power supply, through-wiring possible

- Ⓢ synchronization of multiple luminaires via »air« sync possible (prerequisite all luminaires with »air« and same type)



integrated set box (standard), »air« box optional or DALI box

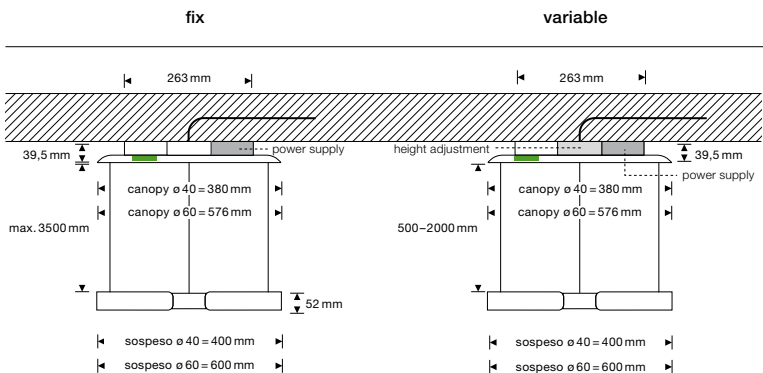


sospeso pure

with plastering element for flush ceiling-mounted installation, integrated power supply, through-wiring possible

- Ⓢ synchronization of multiple luminaires via »air« sync possible (prerequisite all luminaires with »air« and same type)



integrated set box (standard), »air« box optional or DALI box

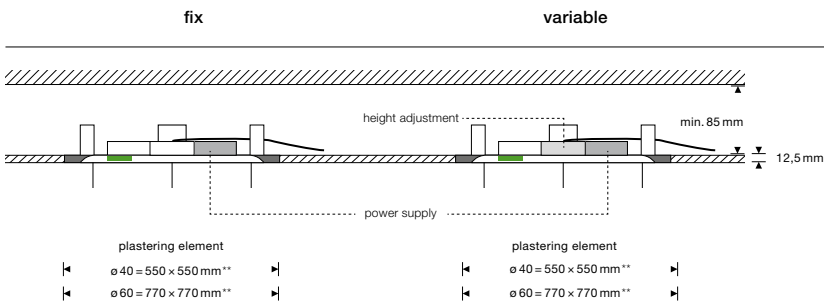

sospeso due

connecting element »Mito connexion« with integrated power supply for surface-mounting


connexion due ø 40:
L 663,5 mm x W 114,5 mm x H 19,5 mm

connexion due ø 60:
L 963,5 mm x W 114,5 mm x H 19,5 mm

- Ⓢ the luminaire heads are synched via an internal control line



integrated set box (standard), »air« box optional or DALI box

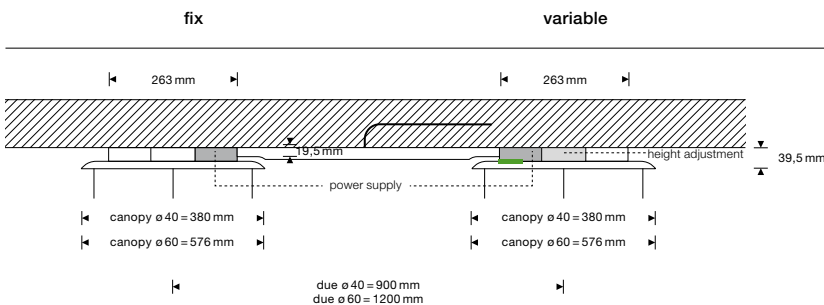

sospeso move up

for surface mounting with integrated power supply, through-wiring possible

- Ⓢ synchronization of multiple luminaires via »air« sync possible (prerequisite all luminaires with »air« and same type)



»air« integrated

sospeso move pure


with plastering element for flush ceiling-mounted installation, integrated power supply, through-wiring possible

- Ⓢ synchronization of multiple luminaires via »air« sync possible (prerequisite all luminaires with »air« and same type)




»air« integrated

move

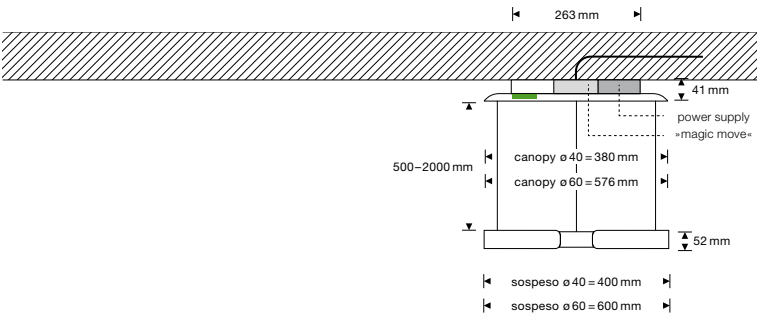

move

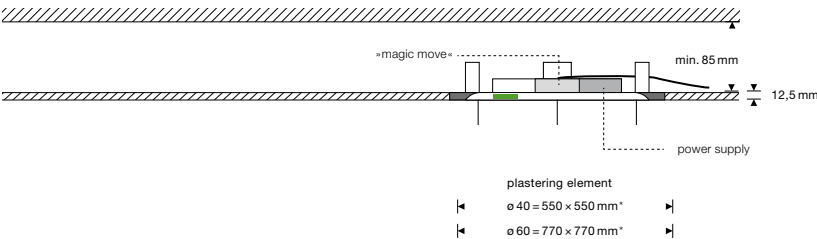


Mito cosmo mounting options

cosmo move
with plastering element for flush ceiling-mounted installation, external power supply (incl.)

- Ⓢ synchronization of multiple luminaires via »air« sync possible (prerequisite all luminaires with »air« and same type)



»air« integrated

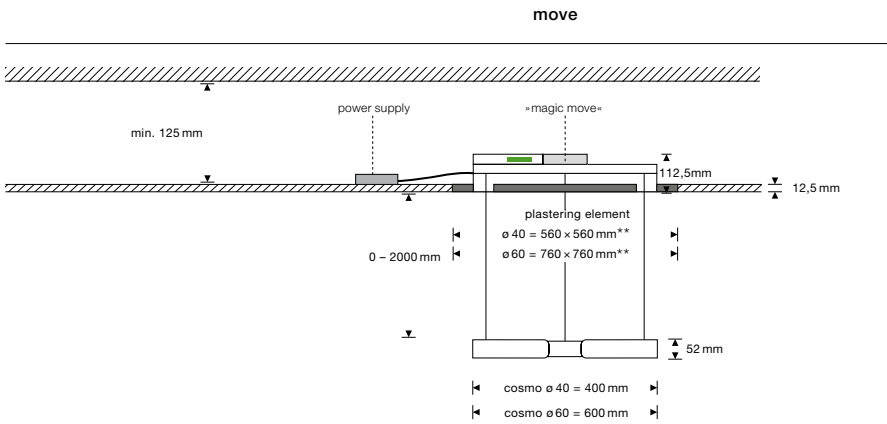


cosmo piano
with plastering element for flush ceiling-mounted installation, external power supply (incl.)

- Ⓢ synchronization of multiple luminaires via »air« sync possible (prerequisite all luminaires with »air« and same type)



»air« integrated

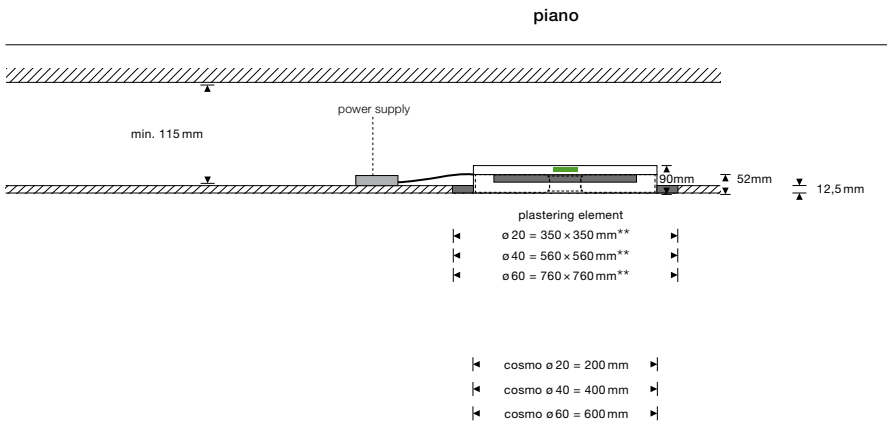


Mito aura mounting options

aura
for surface mounting with integrated power supply,
also suitable for wall mounting,
through-wiring possible

- ⌚ synchronization of multiple luminaires via
»air« sync possible (prerequisite all luminaires
with »air« and same type)

 integrated set box (standard),
»air« box optional or DALI box

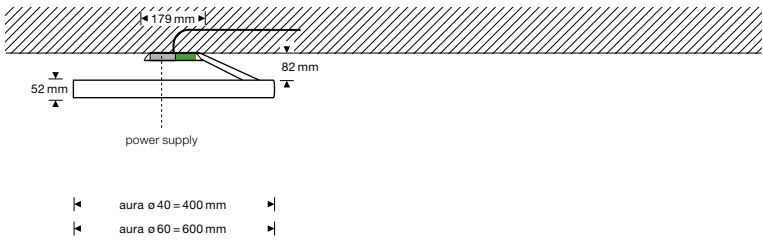


Mito aura alta mounting options

aura alta
for surface mounting with integrated power supply,
through-wiring possible

- ⌚ synchronization of multiple luminaires via
»air« sync possible (prerequisite all luminaires
with »air« and same type)


 integrated set box (standard),
»air« box optional or DALI box

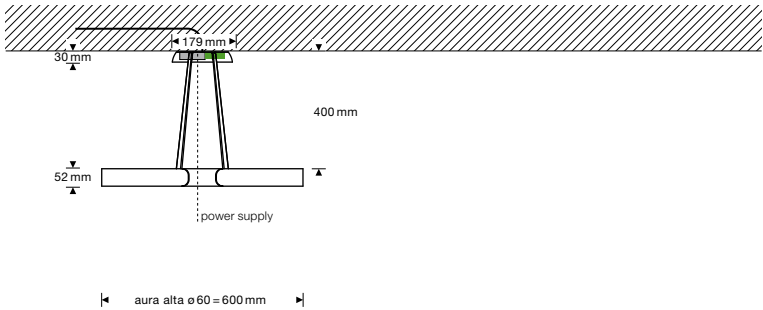

Mito soffitto mounting options


soffitto flat
for hollow ceiling mounting,
also suitable for wall mounting,
remote power supply (optional)

 integrated set box (standard),
»air« box optional or DALI box

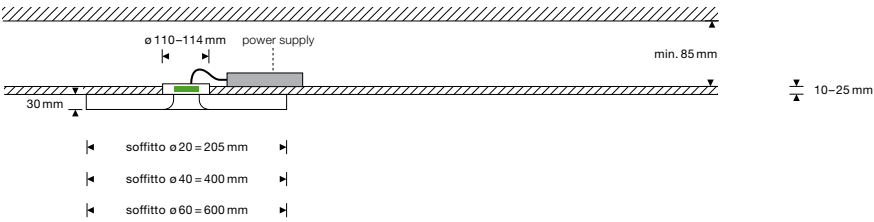

soffitto up
for surface mounting with integrated power supply,
also suitable for wall mounting,
through-wiring possible

 integrated set box (standard),
»air« box optional or DALI box
(DALI only ø 40 and ø 60)

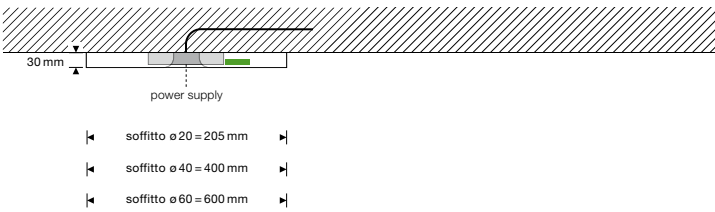


Mito sfera mounting options

sfera
for surface mounting with integrated power supply,
through-wiring possible

Ⓢ synchronization of multiple luminaires via
»air« sync possible (prerequisite all luminaires
with »air« and same type)



 integrated set box (standard),
»air« box optional

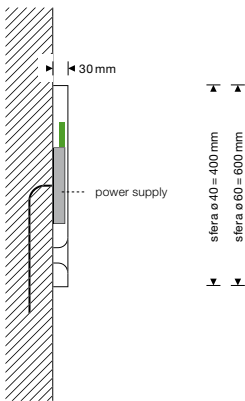

sfera su
for mounting on a mirror
incl. external power supply

Ⓢ synchronization of multiple luminaires via
»air« sync possible (prerequisite all luminaires
with »air« and same type)


 integrated set box (standard),
»air« box optional

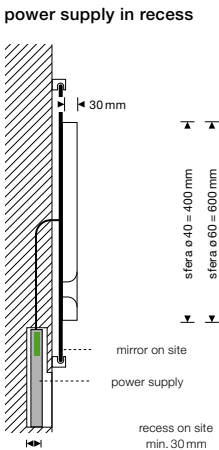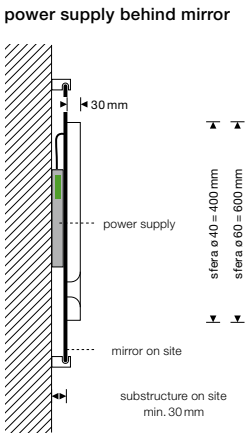

sfera corda
for surface mounting with integrated power supply,
incl. power cable for socket

Ⓢ synchronization of multiple luminaires via
»air« sync possible (prerequisite all luminaires
with »air« and same type)




 integrated set box (standard),
»air« box optional

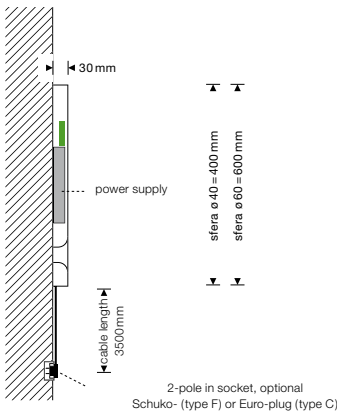

Mito technical data

version »color tune«				
connection	U	230 V AC		
	W	sospeso 40	–40 W	
		sospeso 60	–60 W	
		cosmo move 40	–40 W	
		cosmo move 60	–60 W	
		cosmo piano 20	–20 W	
		cosmo piano 40	–40 W	
		cosmo piano 60	–60 W	
		soffitto 20	–20 W	
		soffitto 40	–40 W	
		soffitto 60	–60 W	
		aura 40	–40 W	
		aura 60	–60 W	
		aura alta	–60 W	
		sfera 40	–20 W	
		sfera 60	–40 W	
		raggio	–60 W	
		largo	–60 W	
average service life	t	> 50.000 h		
energy-efficiency class	EEK	G		
protection class		IP 20		
		IP 44 (Mito sfera and Mito sfera su)		
LED		high color	x-tra warm	
color temperature	T	2700–4000 K	2200–3500 K	
Color Rendering Index	CRI	Ra 95	Ra 95	
recommended use		residential and public	residential	
power	P	high color		
luminous flux luminaire	φ	20 W	40 W	60 W
sospeso/cosmo move				
lighting effect table (wide)			2220 lm	3330 lm
lighting effect room (narrow)			2140 lm	3210 lm
cosmo piano				
lighting effect table (wide)		850 lm	1700 lm	2400 lm
lighting effect room (narrow)		720 lm	1440 lm	2060 lm
soffitto				
lighting effect wall (wide)		850 lm	1700 lm	2400 lm
lighting effect ceiling (narrow)		720 lm	1440 lm	2060 lm
aura				
lighting effect (wide)			2310 lm	3460 lm
lighting effect (narrow)			2140 lm	3210 lm
aura alta				
Lichtwirkung (wide)				3460 lm
Lichtwirkung (narrow)				3210 lm
sfera/sfera su/sfera corda				
lighting effect wide-diffuse		800 lm	1600 lm	
raggio/largo				
lighting effect flood/wide				3330 lm


Mito control

version (»color tune«)		Mito luminaires can be dimmed via »touchless control« (sospeso, sfera, raggio, largo), »body sensor« (raggio) and Occhio air (standard for raggio, largo, sospeso move, cosmo; optional for sospeso, soffitto, sfera). Alternatively dimming via trailing-edge phase cut* or DALI is possible (not raggio, largo, sospeso move, cosmo).		
Mito set box		 sospeso/aura/sfera  soffitto/aura alta	sospeso*/aura/sfera COLOR (sensor off) adjustable color temperature (4 steps), trailing-edge phase cut dimming possible PRESET (sospeso/aura) adjustable color temperature (4 steps), adjustable up/downlight ratio (5 steps) PRESET (sfera) adjustable color temperature (4 steps), adjustable light intensity (5 steps)	SENSOR »touchless control« (gesture control), switching, dimming, »up/down fading«**, »color tune« (color temperature continuously adjustable), no external dimming possible soffitto COLOR adjustable color temperature (4 steps), trailing-edge phase cut dimming possible
Mito »air« box		 sospeso/aura/sfera  soffitto/raggio/largo/aura alta <i>Occhio air powered by Casambi</i>	 Occhio air Bluetooth control via Occhio air app or »air« controller (optional), control of individual luminaires, groups and scenes. sospeso*/aura/sfera SENSOR »air« + »touchless control« (Bluetooth and gesture control), control via »touchless control« and Occhio air app or »air« controller, switching, dimming, »up/down fading«**, »color tune« (color temperature continuously adjustable) SENSOR OFF »air« (Bluetooth control), control via Occhio air app or »air« controller switching, dimming, »up/down fading«**, »color tune« (color temperature continuously adjustable) raggio/largo Bluetooth control integrated in power supply, »air« + »touchless control« (Bluetooth and gesture control) and »body sensor« (only raggio), control via »touchless control«, »body sensor« (nur raggio) and Occhio air app or »air« controller, switching, dimming, »up/down fading«, »color tune« (color temperature continuously adjustable), control and sensors can be deactivated via Occhio air App	soffitto »air« (Bluetooth control), control via Occhio air app or »air« controller, switching, dimming, »color tune« (color temperature continuously adjustable) sospeso move/cosmo Bluetooth control integrated, »air« + »touchless control« (Bluetooth and gesture control), control via »touchless control« and Occhio air app or »air« controller, switching, dimming, »up/down fading«, »color tune« (color temperature continuously adjustable), »magic move« (electrical height adjustment), control and sensors can be deactivated via Occhio air app No external dimming possible with Mito »air« box
Mito DALI box		 sospeso/soffitto  aura	control via DALI sospeso*/aura adjustable color temperature***, continuously dimmable, uplight and downlight separately controllable (two DALI addresses required), no »touchless control«, no »up/down fading« soffitto (DALI not for Mito soffitto 20 up) adjustable color temperature***, continuously dimmable	*not Mito sospeso move **not Mito sfera ***A DALI controller »DALI device type 8 (DT8)« is required to control the light color. Further information can be found at occhio.com/dali

X series

Edizione Lusso

Precious marble, finest ascot leather, fascinating new surface finishes: Edizione Lusso focuses on extraordinary materials. The exclusive edition includes luminaires from the Mito series and gives them a new and incomparable appearance with exquisite accents.

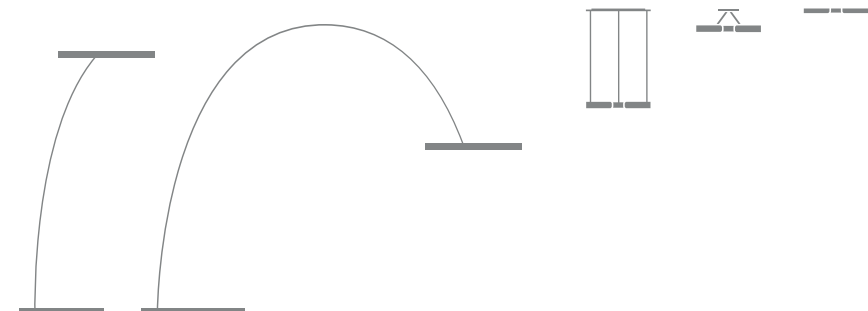

Mito raggio lusso



scuro

7.176,47



caldo

7.176,47



vivo

7.176,47

height 205 cm ø head 60 cm, 60 W (3330 lm)	
surfaces	head black phantom body (Ascot leather) nero base (marble) nero marquina
control	features »color tune«, »up/down fading«, switch- and dimmable via »touchless control«, »body sensor« (only raggio), and Occhio air (included)
options	light source high color LED CRI95 2700 K–4000 K 2200 K–3500 K »x-tra warm« + 126,05 lighting effects flood wide
further options	These and further options can be configured at Occhio Digital Order System (DOS)
further information	- technical data, information on control and on mounting options view pages 64–65

Mito largo lusso



scuro

9.243,70



caldo

9.243,70



vivo

9.243,70

height head 130 cm, 145 cm, 160 cm (adjustable) resulting total height approx. 210–240 cm, ø head 60 cm, 60 W (3330 lm)			
surfaces	head black phantom  body (Ascot leather) nero  base (marble) nero marquina 	head phantom  body (Ascot leather) marrone  base (marble) marrone emperador 	head phantom  body (Ascot leather) grigio  base (marble) verde guatemala 
control	features »color tune«, »up/down fading«, switch- and dimmable via »touchless control«, »body sensor« (only raggio), and Occhio air (included)	Occhio air  Bluetooth control integrated in power supply. Features via Occhio air app or »air« controller (optional) controllable, no external dimming	
options	light source high color LED CRI 95 2700 K–4000 K  2200 K–3500 K »x-tra warm« + 126,05	lighting effects  flood  wide	
further options	These and further options can be configured at Occhio Digital Order System (DOS)	further information - technical data, information on control and on mounting options view pages 64–65	

Mito sospeso 40 lusso



scuro

caldo

vivo

intenso

oro

puro

3.436,97

3.436,97

3.436,97

3.310,92

3.058,82

3.058,82

● special lengths up to 500 cm possible (surcharge per head +319,33, discountable)

continuous height adjustment 50–200 cm, for surface-mounted installation
ø 40 cm, 40 W (2220 lm) through-wiring possible

surfaces	head black phantom		head phantom		head phantom		head rose gold		head matt gold		head matt white	
	cover (Ascot leather) nero		cover (Ascot leather) marrone		cover (Ascot leather) grigio		cover (Ascot leather) grigio		cover (Ascot leather) bianco		cover (Ascot leather) bianco	
control	features »color tune«, »up/down fading«, switch- and continuously dimmable via »touchless control« (can be deactivated) and Occhio air (optional)		Mito set box features adjustable via »touchless control« (no external dimming). Alternative: color temperature 2700 K/3000 K/3500 K/4000 K and »up/down fading« adjustable, dimmable via trailing-edge phase cut dimmer (not for »x-tra warm«)				Mito »air« box  Bluetooth control integrated in cover/canopy. Features via Occhio air app or »air« controller (optional) controllable (no external dimming) + 82,35		Mito DALI box version for building control system via DALI (no »touchless control«) + 82,35			
	options light source high color LED CRI 95 2700 K–4000 K with set, »air« or DALI box		 2200 K–3500 K »x-tra warm« only with »air« or DALI box + 84,03				lighting effects room  diffuse  narrow		table  flood  wide			
further options						further information						
These and further options can be configured at Occhio Digital Order System (DOS)						- technical data, information on control and on mounting options view pages 56–65						

Mito sospeso 60 lusso

table

																			
scuro			caldo			vivo			intenso			oro			puro				
4.579,83			4.579,83			4.579,83			4.386,55			4.000,00			4.000,00				
⦿ special lengths up to 500 cm possible (surcharge per head +319,33, discountable)																			
continuous height adjustment 50–200 cm, for surface-mounted installation ø 60 cm, 60 W (3330 lm) through-wiring possible																			
surfaces		head black phantom			head phantom			head phantom			head rose gold			head matt gold			head matt white		
		cover (Ascot leather) nero			cover (Ascot leather) marrone			cover (Ascot leather) grigio			cover (Ascot leather) grigio			cover (Ascot leather) bianco			cover (Ascot leather) bianco		
control		features »color tune«, »up/down fading«, switch- and continuously dimmable via »touchless control« (can be deactivated) and Occhio air (optional)						Mito set box features adjustable via »touchless control« (no external dimming). Alternative: color temperature 2700 K/3000 K/3500 K/4000 K and »up/down fading« adjustable, dimmable via trailing-edge phase cut dimmer (not for »x-tra warm«)											
								Mito »air« box  Bluetooth control integrated in cover/canopy. Features via Occhio air app or »air« controller (optional) controllable (no external dimming) + 82,35										Mito DALI box version for building control system via DALI (no »touchless control«) + 82,35	
options		light source high color LED CRI 95 2700 K–4000 K with set, »air« or DALI box										lighting effects room  diffuse narrow table  flood wide							
further options		These and further options can be configured at Occhio Digital Order System (DOS)										further information - technical data, information on control and on mounting options view pages 56–65							

Mito aura 40 lusso

narrow



	scuro	caldo	vivo	intenso	oro	puro
	2.521,01	2.521,01	2.521,01	2.394,96	2.142,86	2.142,86
	for surface-mounted installation, incl. power supply ø 40 cm, 40 W (2310 lm), H 13,5 cm					
surfaces	head black phantom  body matt black  cover (Ascot leather) nero 	head phantom  body matt black  cover (Ascot leather) marrone 	head phantom  body matt black  cover (Ascot leather) grigio 	head rose gold  body matt black  cover (Ascot leather) grigio 	head matt gold  body matt white  cover (Ascot leather) bianco 	head matt white  body matt white  cover (Ascot leather) bianco 
control	features »color tune«, »up/down fading«, switch- and continuously dimmable via »touchless control« (can be deactivated) and Occhio air (optional) Mito set box features adjustable via »touchless control« (no external dimming). Alternative: color temperature 2700 K/3000 K/3500 K/4000 K and »up/down fading« adjustable, dimmable via trailing-edge phase cut dimmer (not for »x-tra warm«)			Mito »air« box  Bluetooth control integrated in cover/canopy. Features via Occhio air app or »air« controller (optional) controllable (no external dimming) + 82,35 Mito DALI box version for building control system via DALI (no »touchless control«) + 82,35		
options	light source high color LED CRI 95 2700 K–4000 K with set, »air« or DALI box  2200 K–3500 K »x-tra warm« only with »air« or DALI box + 84,03			lighting effects ceiling  diffuse  narrow ceiling  diffuse  wide wall  diffuse  wide		
further options	These and further options can be configured at Occhio Digital Order System (DOS)			further information - technical data, information on control and on mounting options view pages 60–65		

Mito aura 60 lusso

narrow



scuro			caldo			vivo			intenso			oro			puro				
3.411,76			3.411,76			3.411,76			3.218,49			2.831,93			2.831,93				
for surface-mounted installation, incl. power supply ø 40 cm, 40 W (3460 lm), H 13,5 cm																			
surfaces	head		head		head		head		head		head		head		head		head		
	black phantom		phantom		phantom		phantom		rose gold		matt gold		matt white		matt white		matt white		
	body		body		body		body		body		body		body		body		body		
matt black		matt black		matt black		matt black		matt black		matt black		matt white		matt white		matt white		matt white	
cover (Ascot leather)		cover (Ascot leather)		cover (Ascot leather)		cover (Ascot leather)		cover (Ascot leather)		cover (Ascot leather)		cover (Ascot leather)		cover (Ascot leather)		cover (Ascot leather)		cover (Ascot leather)	
nero		marrone		grigio		grigio		grigio		grigio		bianco		bianco		bianco		bianco	
control	features			Mito set box			Mito »air« box			Mito DALI box			Mito DALI box			Mito DALI box			
	»color tune«, »up/down fading«, switch- and continuously dimmable via »touchless control« (can be deactivated) and Occhio air (optional)			features adjustable via »touchless control« (no external dimming). Alternative: color temperature 2700 K/3000 K/3500 K/4000 K and »up/down fading« adjustable, dimmable via trailing-edge phase cut dimmer (not for »x-tra warm«)			Bluetooth control integrated in cover/canopy. Features via Occhio air app or »air« controller (optional) controllable (no external dimming)			version for building control system via DALI (no »touchless control«)			version for building control system via DALI (no »touchless control«)			version for building control system via DALI (no »touchless control«)			
								+ 82,35			+ 82,35			+ 82,35			+ 82,35		
options	light source			lighting effects			lighting effects			lighting effects			lighting effects			lighting effects			
	high color LED CRI 95			ceiling			ceiling			ceiling			ceiling			ceiling			
2700 K–4000 K		2200 K–3500 K »x-tra warm«		ceiling		ceiling		ceiling		ceiling		ceiling		ceiling		ceiling		ceiling	
with set, »air« or DALI box		only with »air« or DALI box		diffuse		diffuse		diffuse		diffuse		diffuse		diffuse		diffuse		diffuse	
+ 126,05		+ 126,05		narrow		wide		wide		wide		wide		wide		wide		wide	
further options																			
These and further options can be configured at Occhio Digital Order System (DOS)			further information			- technical data, information on control and on mounting options view pages 60–65													

Mito soffitto 20 lusso




narrow



	scuro	caldo	vivo	intenso	oro	puro
	1.226,89	1.226,89	1.226,89	1.176,47	1.075,63	1.075,63
for surface-mounted installation, ø 20 cm, 20 W (850 lm) through-wiring possible						
surfaces	head black phantom  cover (Ascot leather) nero 	head phantom  cover (Ascot leather) marrone 	head phantom  cover (Ascot leather) grigio 	head rose gold  cover (Ascot leather) grigio 	head matt gold  cover (Ascot leather) bianco 	head matt white  cover (Ascot leather) bianco 
control	features »color tune«, switch- and continuously dimmable via Occhio air (optional)			Mito »air« box  Bluetooth control integrated in cover/canopy. Features via Occhio air app or »air« controller (optional) controllable (no external dimming) + 82,35		Mito DALI box version for building control system via DALI + 82,35
options	light source high color LED CRI 95 2700 K–4000 K with set, »air« or DALI box  2200 K–3500 K »x-tra warm« only with »air« or DALI box + 50,42			lighting effects ceiling  narrow ceiling  wide wall to wall  wide		
further options	These and further options can be configured at Occhio Digital Order System (DOS)			further information - technical data, information on control and on mounting options view pages 61–65		

Mito soffitto 40 lusso

narrow

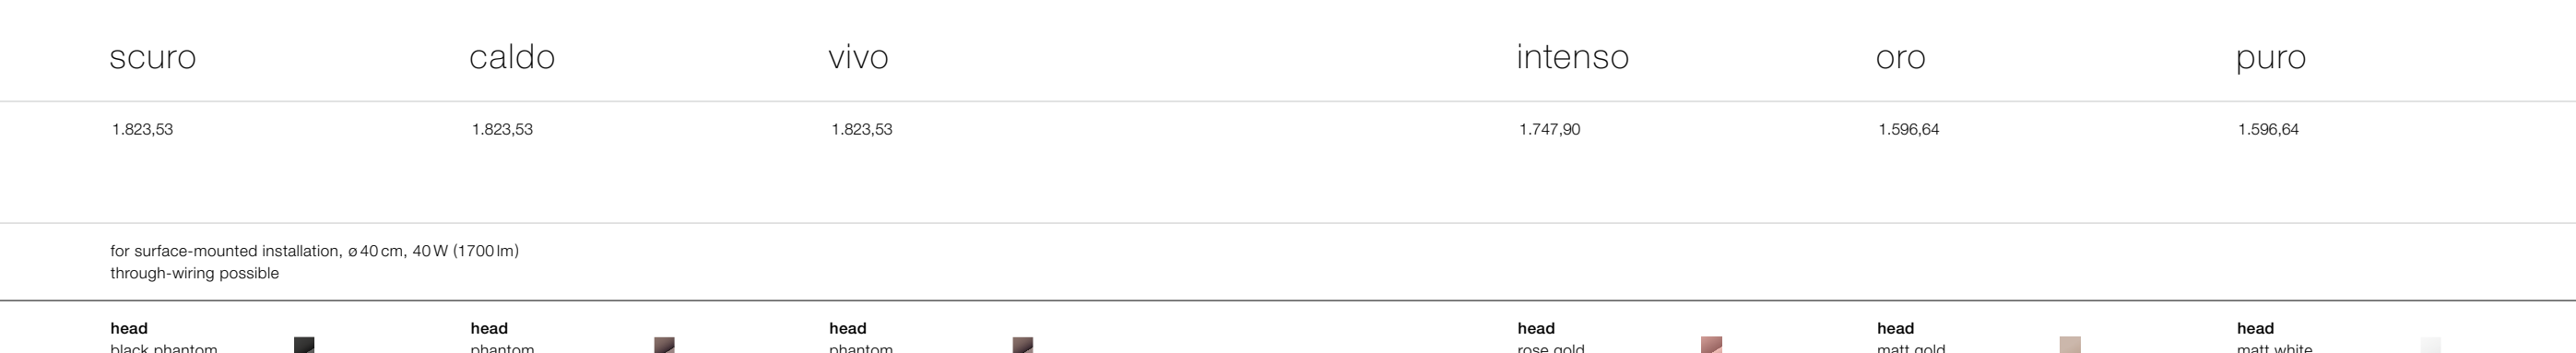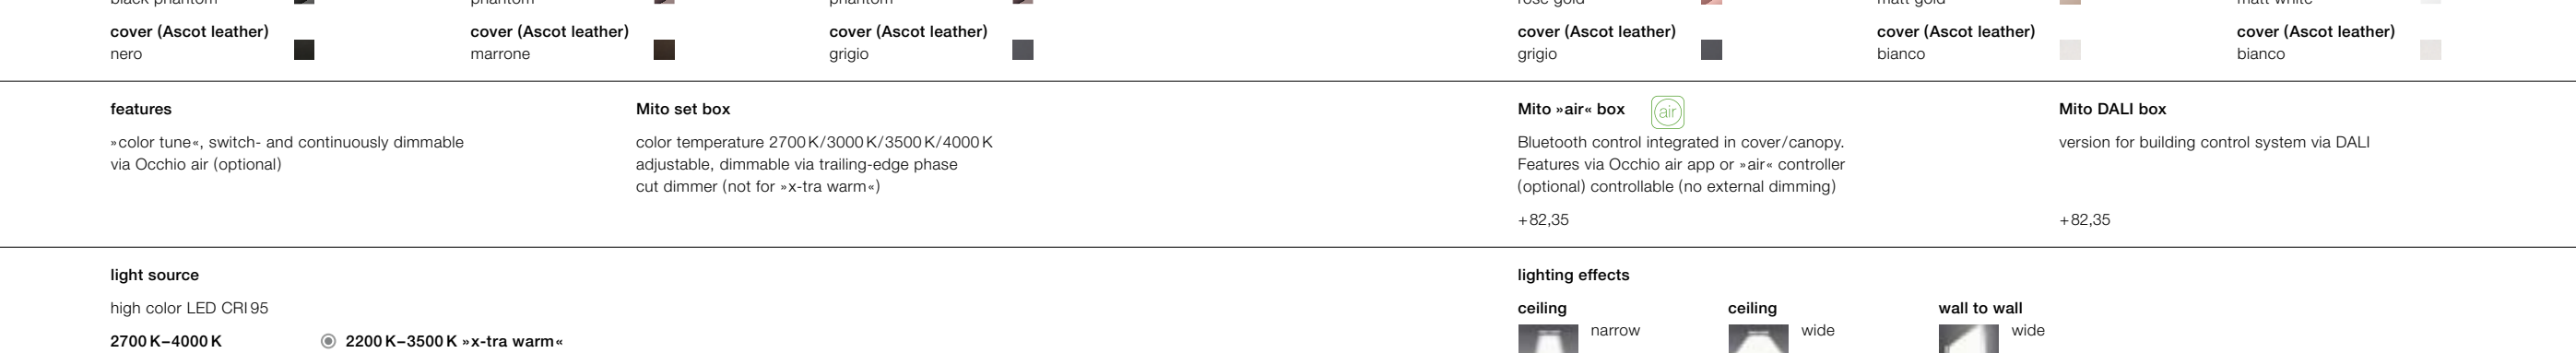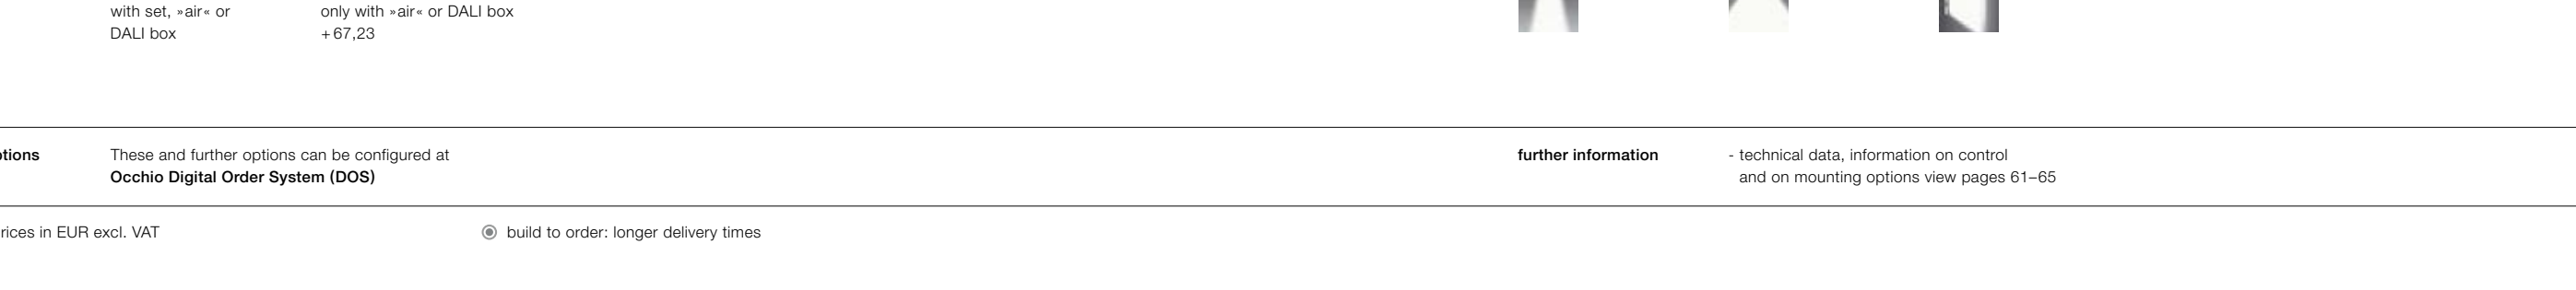Mito soffitto 60 lusso

narrow




	scuro	caldo	vivo		intenso	oro	puro
	2.638,66	2.638,66	2.638,66		2.521,01	2.285,71	2.285,71
for surface-mounted installation, ø 60 cm, 60 W (2400 lm) through-wiring possible							
surfaces	head black phantom  cover (Ascot leather) nero 	head phantom  cover (Ascot leather) marrone 	head phantom  cover (Ascot leather) grigio 		head rose gold  cover (Ascot leather) grigio 	head matt gold  cover (Ascot leather) bianco 	head matt white  cover (Ascot leather) bianco 
control	features »color tune«, switch- and continuously dimmable via Occhio air (optional)		Mito set box color temperature 2700 K/3000 K/3500 K/4000 K adjustable, dimmable via trailing-edge phase cut dimmer (not for »x-tra warm«)		Mito »air« box  Bluetooth control integrated in cover/canopy. Features via Occhio air app or »air« controller (optional) controllable (no external dimming) + 82,35		Mito DALI box version for building control system via DALI + 82,35
options	light source high color LED CRI 95 2700 K–4000 K with set, »air« or DALI box  2200 K–3500 K »x-tra warm« only with »air« or DALI box + 84,03				lighting effects ceiling  narrow ceiling  wide wall to wall  wide		
further options	These and further options can be configured at Occhio Digital Order System (DOS)				further information	- technical data, information on control and on mounting options view pages 61–65	

X series

Mito linear

The new shape of light. Mito linear is the logical extension of the iconic Mito series. It transfers the design claim and the extraordinary lighting quality of Mito in brand new application areas in the residential and contract sector. With its comprehensive concept and innovative features Mito linear enables a new dimension of holistic lighting design.

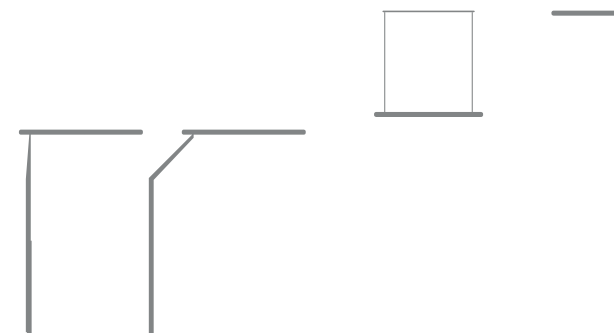

Mito linear

floor- and table luminaires



terra 190

head length 115 cm
height 190 cm

head fix




can be synced via Occhio air

terra 220

head length 115 cm
height 220 cm

head fix




can be synced via Occhio air

terra var

head length 115 cm
height adjustable 190–220 cm

head fix




can be synced via Occhio air

table top

head length 115 cm
height 145 cm, 220 cm at 75 cm
standard table height

head fix



can be synced via Occhio air

70 W (4600 lm)	colors	2.504,20	2.603,36	2.878,99	2.411,76
56 W (3600 lm)	materials	+235,29		+235,29	
56 W (3600 lm)	phantom/ black phantom	+352,94		+352,94	

control	features	Occhio air			
	switch- and dimmable via »touchless control« and »body sensor«, presence recognition via »presence sensor«, adaptation to ambient light via »ambient light control«, additionally controllable via Occhio air (inclusive)	Bluetooth control integrated in power supply, features via Occhio air app or »air« controller (optional) controllable, no external dimming			
options	light source	lighting effects	surfaces	head/body/base colors	materials/phantom/black phantom
	high color LED CRI95 2700 K–4000 K	flood wide asymmetric light emission		matt white matt black matt silver matt black/matt silver gold matt/matt white gold matt/matt black	rose gold/matt black bronze/matt black phantom/matt black black phantom/matt black
				The surfaces rose gold, bronze, phantom and black phantom may differ slightly from other product lines.	

further options	- accessories for Occhio air from page 260	These and further options can be configured at Occhio Digital Order System (DOS)	further information	- technical data and information on control view pages 114–115
-----------------	--	---	---------------------	--

Mito linear


floor luminaires



terra 3d

head length 115 cm
height 190 cm
head swivelable by 60°

☺ can be synced via Occhio air



70 W (4600 lm)	colors	2.924,37					
56 W (3600 lm)	materials	+235,29					
56 W (3600 lm)	phantom/ black phantom	+352,94					
control	features	Occhio air  Bluetooth control integrated in power supply, features via Occhio air app or »air« controller (optional) controllable, no external dimming					
options	light source	lighting effects	surfaces	head/body/base colors	materials/phantom/black phantom		
	high color LED CRI95 2700 K–4000 K	 flood  wide  symmetric light emission		 matt white  matt black  matt silver	 matt black/matt silver  gold matt/matt white  gold matt/matt black	 rose gold/matt black  bronze/matt black  phantom/matt black  black phantom/matt black	The surfaces rose gold, bronze, phantom and black phantom may differ slightly from other product lines.
further options	- accessories for Occhio air from page 260	These and further options can be configured at Occhio Digital Order System (DOS)	further information	- technical data and information on control view pages 114–115			

Mito linear

suspended luminaires

volo 100



Mito linear

fix flat

fix up

fix up midfeed

fix pendant length adjustable during mounting, max. 350 cm		fix for hollow ceiling length 103 cm, 45 W (2900 lm) incl. remote converter		fix for surface-mounted installation length 103 cm, 45 W (2900 lm) through-wiring possible incl. converter		fix for surface-mounted installation/midfeed length 103 cm, 45 W (2900 lm) through-wiring possible incl. converter	
		Ⓢ can be synced via Occhio air		Ⓢ can be synced via Occhio air		Ⓢ can be synced via Occhio air	
colors		1.510,92		1.653,78		1.737,82	
materials		+201,68				+201,68	
phantom/black phantom		+302,52				+302,52	
control		features »color tune«, »up/down fading«, switch- and continuously dimmable via »touchless control« (can be deactivated) and Occhio air (optional)		Mito set box features adjustable via »touchless control« (no external dimming). Alternative: color temperature 2700 K/3000 K/3500 K/4000 K and »up/down fading« adjustable, dimmable via trailing-edge phase cut dimmer (not for »x-tra warm«)		Mito »air« box  Bluetooth control integrated in luminaire. Features via Occhio air app or »air« controller (optional) controllable (no external dimming)	
						+ 82,35	
options		light source high color LED CRI95 2700 K–4000 K with set, »air« or DALI box		lighting effects room  diffuse  narrow		surfaces	
		Ⓢ 2200 K–3500 K »x-tra warm« only with »air« or DALI box + 84,03		table  flood  wide		head colors matt white  matt black  matt silver  matt gold 	
						materials/phantom/black phantom rose gold  bronze  phantom  black phantom 	
						canopy matt white  matt black* 	
						*canopy in matt black (surcharge + 134,45; flat Version + 67,23) Ⓢ The surfaces rose gold, bronze, phantom and black phantom may differ slightly from other product lines.	
further options		- accessories for Occhio air from page 260		These and further options can be configured at Occhio Digital Order System (DOS)		further information - technical data, information on control and on mounting options view pages 108–115	

Mito linear

suspended luminaires

volo 100



var up

var pure

variable continuous height adjustment 65–165 cm  135–235 cm	variable for surface-mounted installation length 103 cm, 45 W (2900 lm) through-wiring possible incl. converter  can be synced via Occhio air	variable flush ceiling-mounted installation in hollow ceiling, incl. mounting board, power supply integrated in luminaire length 103 cm, 45 W (2900 lm) incl. converter  can be synced via Occhio air			
	65–165 cm  135–235 cm	65–165 cm  135–235 cm			
colors	2.168,07	2.302,52	2.596,64	2.731,09	
materials	+201,68				
phantom/black phantom	+302,52				
	 special lengths up to 500 cm possible (surcharge per head +319,33, discountable)				
control	features »color tune«, »up/down fading«, switch- and continuously dimmable via »touchless control« (can be deactivated) and Occhio air (optional)	Mito set box features adjustable via »touchless control« (no external dimming). Alternative: color temperature 2700 K/3000 K/3500 K/4000 K and »up/down fading« adjustable, dimmable via trailing-edge phase cut dimmer (not for »x-tra warm«)	Mito »air« box  Bluetooth control integrated in luminaire. Features via Occhio air app or »air« controller (optional) controllable (no external dimming) + 82,35	Mito DALI box external control via DALI (no »touchless control«) version track: only for OneTrack by Eutrac/Stucchi track + 82,35	
options	light source high color LED CRI95 2700 K–4000 K with set, »air« or DALI box	lighting effects room  diffuse  narrow table  flood  wide	surfaces	head colors matt white  matt black  matt silver  matt gold  materials/phantom/black phantom rose gold  bronze  phantom  black phantom  *canopy in matt black (surcharge + 134,45)  The surfaces rose gold, bronze, phantom and black phantom may differ slightly from other product lines.	canopy matt white  matt black* 
further options	- accessories for Occhio air from page 260		These and further options can be configured at Occhio Digital Order System (DOS)	further information - technical data, information on control and on mounting options view pages 108–115	

Mito linear

suspended luminaires

volò 140



fix flat		fix up		fix up midfeed	
fix pendant length adjustable during mounting, max. 350 cm		fix for hollow ceiling length 136 cm, 60 W (3900 lm) incl. remote converter		fix for surface-mounted installation/midfeed length 136 cm, 60 W (3900 lm) through-wiring possible incl. converter	
		Ⓢ can be synced via Occhio air		Ⓢ can be synced via Occhio air	
colors		1.855,46		2.126,05	
materials		+ 268,91		+ 268,91	
phantom/black phantom		+ 403,36		+ 403,36	
control		features »color tune«, »up/down fading«, switch- and continuously dimmable via »touchless control« (can be deactivated) and Occhio air (optional)		Mito »air« box  Bluetooth control integrated in luminaire. Features via Occhio air app or »air« controller (optional) controllable (no external dimming)	
		Mito set box features adjustable via »touchless control« (no external dimming). Alternative: color temperature 2700 K/3000 K/3500 K/4000 K and »up/down fading« adjustable, dimmable via trailing-edge phase cut dimmer (not for »x-tra warm«)		+ 82,35	
options		light source high color LED CRI95 2700 K–4000 K with set, »air« or DALI box Ⓢ 2200 K–3500 K »x-tra warm« only with »air« or DALI box + 100,84		surfaces head colors matt white  matt black  matt silver  matt gold  materials/phantom/black phantom rose gold  bronze  phantom  black phantom  *canopy in matt black (surcharge + 201,68; flat Version + 67,23) Ⓢ The surfaces rose gold, bronze, phantom and black phantom may differ slightly from other product lines.	
lighting effects room  diffuse  narrow table  flood  wide		canopy matt white  matt black* 		further options - accessories for Occhio air from page 260	
		These and further options can be configured at Occhio Digital Order System (DOS)		further information - technical data, information on control and on mounting options view pages 108–115	

Mito linear

suspended luminaires

volo 140



var up

var pure

variable continuous height adjustment 65–165 cm  135–235 cm	variable for surface-mounted installation length 136 cm, 60 W (3900 lm) through-wiring possible incl. converter  can be synced via Occhio air	variable flush ceiling-mounted installation in hollow ceiling, incl. mounting board, power supply integrated in luminaire length 136 cm, 60 W (3900 lm) incl. converter  can be synced via Occhio air						
colors	65–165 cm 2.605,04	 135–235 cm 2.806,72	65–165 cm 3.139,50	 135–235 cm 3.341,18				
materials	+268,91							
phantom/black phantom	+403,36							
 special lengths up to 500 cm possible (surcharge per head +319,33, discountable)								
control	features »color tune«, »up/down fading«, switch- and continuously dimmable via »touchless control« (can be deactivated) and Occhio air (optional)		Mito set box features adjustable via »touchless control« (no external dimming). Alternative: color temperature 2700 K/3000 K/3500 K/4000 K and »up/down fading« adjustable, dimmable via trailing-edge phase cut dimmer (not for »x-tra warm«)		Mito »air« box  Bluetooth control integrated in luminaire. Features via Occhio air app or »air« controller (optional) controllable (no external dimming) + 82,35	Mito DALI box external control via DALI (no »touchless control«) version track: only for OneTrack by Eutrac/Stucchi track + 82,35		
options	light source high color LED CRI95 2700 K–4000 K with set, »air« or DALI box		lighting effects room  diffuse  narrow		surfaces	head colors matt white  matt black  matt silver  matt gold 	materials/phantom/black phantom rose gold  bronze  phantom  black phantom 	canopy matt white  matt black* 
*canopy in matt black (surcharge + 201,68)  The surfaces rose gold, bronze, phantom and black phantom may differ slightly from other product lines.								

Mito linear

ceiling luminaires

alto 40

					
flat		up		pure	
for hollow ceiling height 32 mm, length 37 cm, 15 W (800 lm) incl. remote converter		for surface-mounted installation height 52 mm, length 37 cm, 15 W (800 lm) incl. converter		recessed installation in hollow ceiling, incl. mounting board, power supply integrated in luminaire height 20 mm, length 37 cm, 15 W (800 lm) incl. converter	
colors	588,24	638,66	823,53		
materials	+ 67,23	+ 100,84	+ 100,84		
phantom/black phantom	+ 100,84	+ 151,26	+ 151,26		

alto 70

					
flat		up		pure	
for hollow ceiling height 32 mm, length 70 cm, 30 W (1600 lm)		for surface-mounted installation height 52 mm, length 70 cm, 30 W (1600 lm) incl. converter		recessed installation in hollow ceiling, incl. mounting board, power supply integrated in luminaire height 20 mm, length 70 cm, 30 W (1600 lm) incl. converter	
colors	806,72	890,76	1.109,24		
materials	+ 100,84	+ 134,45	+ 134,45		
phantom/black phantom	+ 151,26	+ 201,68	+ 201,68		

mounting options (included)							
inlay (flat/up)		»air« inlay (up)		cover for ceiling box (flat/up)			
control	features	Mito set box		Mito »air« box 		Mito DALI box	
	»color tune«, switch- and continuously dimmable via Occhio air (optional)	color temperature 2700 K/3000 K/3500 K/4000 K adjustable in steps, dimmable via trailing-edge phase cut dimmer (not for »x-tra warm«)		Bluetooth control integrated in luminaire, features via Occhio air app or »air« controller (optional) controllable (no external dimming)		version for building control system via DALI version track: only for OneTrack by Eutrac/Stucchi track	
				+ 82,35		+ 82,35	

options	light source	lighting effects		surfaces	head/inlay colors	materials/phantom/black phantom
	high color LED CRI95					
	2700 K–4000 K with set, »air« or DALI box	narrow	wide		matt white matt white/matt black matt black matt black/matt white	rose gold/matt white rose gold/matt black bronze/matt white bronze/matt black
					matt silver matt gold/matt white matt gold/matt black	phantom/matt white phantom/matt black black phantom/ matt white black phantom/ matt black
The surfaces rose gold, bronze, phantom and black phantom may differ slightly from other product lines.						

further options	- accessories for Occhio air from page 260	These and further options can be configured at Occhio Digital Order System (DOS)	further information	- technical data, information on control and on mounting options view pages 110–115
-----------------	--	---	---------------------	--

Mito linear

ceiling luminaires

alto 100



	flat	up		pure
	for hollow ceiling height 32 mm, length 103 cm, 45 W (2400 lm) incl. remote converter	for surface-mounted installation height 52 mm, length 103 cm, 45 W (2400 lm) incl. converter		recessed installation in hollow ceiling, incl. mounting board, power supply integrated in luminaire height 20 mm, length 103 cm, 45 W (2400 lm) incl. converter
colors	1.025,21	1.109,24		1.361,34
materials	+ 151,26	+ 184,87		+ 184,87
phantom/black phantom	+ 226,89	+ 277,31		+ 277,31
mounting options (included)	 inlay (flat/up)	 »air« inlay (up)	 cover for ceiling box (flat/up)	
control	features »color tune«, switch- and continuously dimmable via Occhio air (optional)	Mito set box color temperature 2700 K/3000 K/3500 K/4000 K adjustable in steps, dimmable via trailing-edge phase cut dimmer (not for »x-tra warm«)	Mito »air« box  Bluetooth control integrated in luminaire, features via Occhio air app or »air« controller (optional) controllable (no external dimming) + 82,35	Mito DALI box version for building control system via DALI version track: only for OneTrack by Eutrac/Stucchi track + 82,35
options	light source high color LED CRI95 2700 K–4000 K with set, »air« or DALI box  2200 K–3500 K »x-tra warm« only with »air« or DALI box + 84,03	lighting effects narrow  wide 	surfaces	head/inlay colors matt white  matt white/matt black  matt black  matt black/matt white  matt silver  matt gold/matt white  matt gold/matt black  materials/phantom/black phantom rose gold/matt white  rose gold/matt black  bronze/matt white  bronze/matt black  phantom/matt white  phantom/matt black  black phantom/ matt white  black phantom/ matt black  The surfaces rose gold, bronze, phantom and black phantom may differ slightly from other product lines.
further options	- accessories for Occhio air from page 260	These and further options can be configured at Occhio Digital Order System (DOS)	further information	- technical data, information on control and on mounting options view pages 110–115

Mito linear

ceiling luminaires

alto side 40



side flat



side up



side pure

	for hollow ceiling, height 32 mm, length 38 cm, 15 W (800 lm), incl. remote converter	for surface-mounted installation height 52 mm, length 38 cm, 15 W (800 lm) homogeneous wall illumination (wallwash) incl. converter	recessed installation in hollow ceiling, incl. mounting board, power supply integrated in luminaire height 20 mm, length 38 cm, 15 W (800 lm) incl. converter
colors	705,88	756,30	941,18
materials	+100,84	+117,65	+117,65
phantom/black phantom	+151,26	+176,47	+176,47

alto side 70



side flat



side up



side pure

	for hollow ceiling, height 32 mm, length 71 cm, 30 W (1600 lm), incl. remote converter	for surface-mounted installation height 52 mm, length 71 cm, 30 W (1600 lm) homogeneous wall illumination (wallwash) incl. converter	recessed installation in hollow ceiling, incl. mounting board, power supply integrated in luminaire height 20 mm, length 38 cm, 15 W (800 lm) incl. converter
colors	957,98	1.025,21	1.243,70
materials	+151,26	+184,87	+184,87
phantom/black phantom	+226,89	+277,31	+277,31

mounting options (included)			
	inlay (flat/up)	»air« inlay (up)	cover for ceiling box (flat/up)

control	features »color tune«, switch- and continuously dimmable via Occhio air (optional)	Mito set box color temperature 2700 K/3000 K/3500 K/4000 K adjustable in steps, dimmable via trailing-edge phase cut dimmer (not for »x-tra warm«)	Mito »air« box Bluetooth control integrated in luminaire, features via Occhio air app or »air« controller (optional) controllable (no external dimming) + 82,35	Mito DALI box version for building control system via DALI version track: only for OneTrack by Eutrac/Stucchi track + 82,35
---------	--	---	---	--

options	light source high color LED CRI95 2700 K–4000 K with set, »air« or DALI box	lighting effects wallwash 	surfaces	head/inlay colors matt white matt white/matt black matt black matt black/matt white	materials/phantom/black phantom rose gold/matt white rose gold/matt black bronze/matt white bronze/matt black	phantom/matt white phantom/matt black black phantom/ matt white black phantom/ matt black
The surfaces rose gold, bronze, phantom and black phantom may differ slightly from other product lines.						

further options	- accessories for Occhio air from page 260	These and further options can be configured at Occhio Digital Order System (DOS)	further information	- technical data, information on control and on mounting options view pages 112–115
-----------------	--	---	---------------------	--

Mito linear

ceiling luminaires

alto side 100



Mito linear

side flat

side up

side pure

	for hollow ceiling, height 32 mm, length 104 cm, 45 W (2400 lm), incl. remote converter	for surface-mounted installation height 52 mm, length 104 cm, 45 W (2400 lm) homogeneous wall illumination (wallwash) incl. converter	recessed installation in hollow ceiling, incl. mounting board, power supply integrated in luminaire height 20 mm, length 104 cm, 45 W (2400 lm) incl. converter	with in-trac adapter, for Eutrac, Erco and Zumtobel 3-phase tracks height 52 mm, length 104 cm, 45 W (2400 lm) homogeneous wall illumination (wallwash) incl. converter
colors	1.210,08	1.294,12	1.546,22	
materials	+ 184,87	+ 218,49	+ 218,49	
phantom/black phantom	+ 277,31	+ 327,73	+ 327,73	
mounting options (included)	 inlay (flat/up)	 »air« inlay (up)	 cover for ceiling box (flat/up)	
control	features »color tune«, switch- and continuously dimmable via Occhio air (optional)	Mito set box color temperature 2700 K/3000 K/3500 K/4000 K adjustable in steps, dimmable via trailing-edge phase cut dimmer (not for »x-tra warm«)	Mito »air« box Bluetooth control integrated in luminaire, features via Occhio air app or »air« controller (optional) controllable (no external dimming) + 82,35	Mito DALI box version for building control system via DALI version track: only for OneTrack by Eutrac/Stucchi track + 82,35
options	light source high color LED CRI95 2700 K–4000 K with set, »air« or DALI box 2200 K–3500 K »x-tra warm« only with »air« or DALI box + 84,03	lighting effects wallwash side 70/85 cm 250/300 cm	surfaces	head/inlay colors matt white matt white/matt black matt black matt black/matt white matt silver matt gold/matt white matt gold/matt black materials/phantom/black phantom rose gold/matt white rose gold/matt black bronze/matt white bronze/matt black phantom/matt white phantom/matt black black phantom/ matt white black phantom/ matt black
The surfaces rose gold, bronze, phantom and black phantom may differ slightly from other product lines.				
further options	- accessories for Occhio air from page 260	These and further options can be configured at Occhio Digital Order System (DOS)	further information	- technical data, information on control and on mounting options view pages 112–115

Mito volo mounting options

volo flat


with flat base for mounting on hollow ceiling,
remote power supply

- Ⓢ synchronization of multiple luminaires via
»air« sync possible (prerequisite all luminaires
with »air« and same type)



integrated set box (standard),
»air« box optional or DALI box

fix

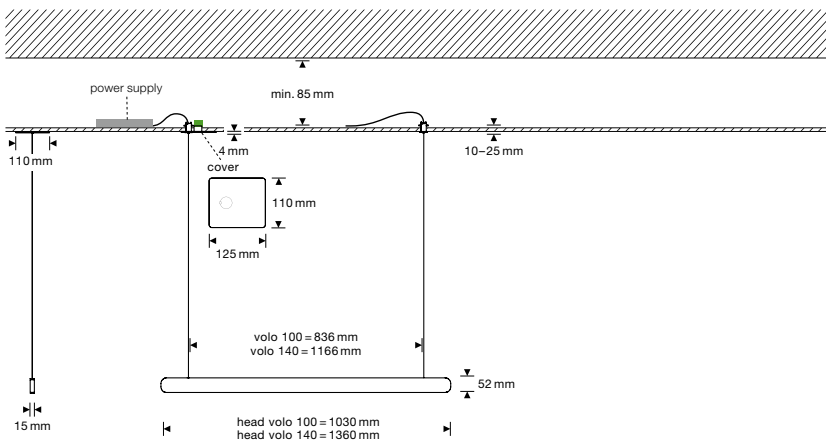

volo var pure


with plastering element for flush ceiling-mounted
installation, with integrated power supply,
through-wiring possible

- Ⓢ synchronization of multiple luminaires via
»air« sync possible (prerequisite all luminaires
with »air« and same type)



integrated set box (standard),
»air« box optional or DALI box

var

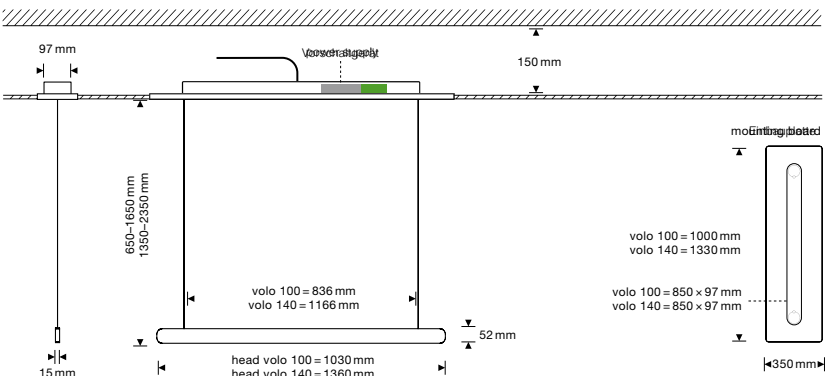

volo up

for surface mounting with integrated
power supply, through-wiring possible


- Ⓢ synchronization of multiple luminaires via
»air« sync possible (prerequisite all luminaires
with »air« and same type)




integrated set box (standard),
»air« box optional or DALI box

fix

var

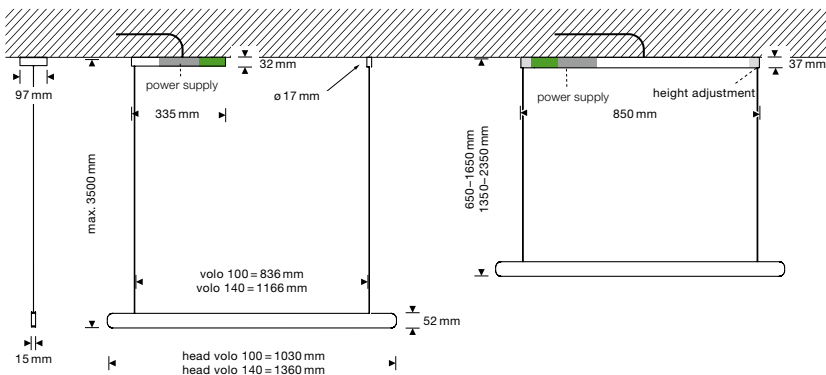

fix

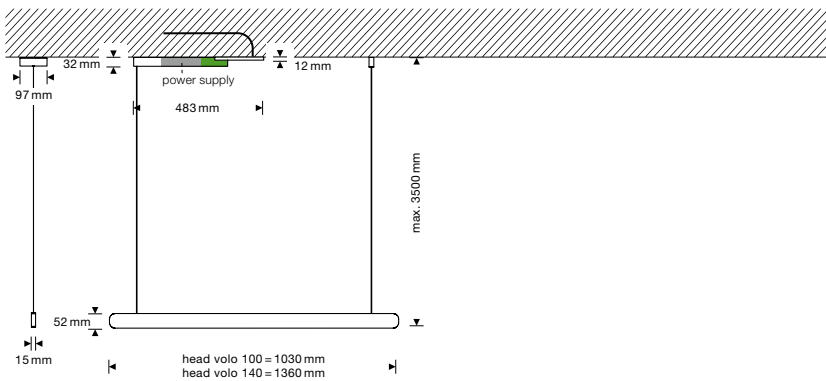

volo up midfeed

for surface mounted installation and midfeed
with integrated power supply, through-wiring
possible

- Ⓢ synchronization of multiple luminaires via
»air« sync possible (prerequisite all luminaires
with »air« and same type)




integrated set box (standard),
»air« box optional or DALI box

Mito alto mounting options


alto flat
for hollow ceiling mounting with remote
power supply

 inclusive set box (standard),
»air« box optional or DALI box

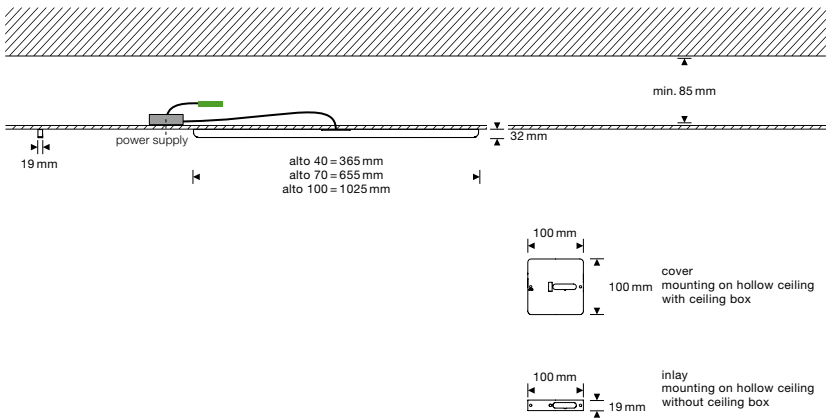



alto up
for surface mounting with integrated
power supply

 integrated set box (standard),
»air« box optional or DALI box

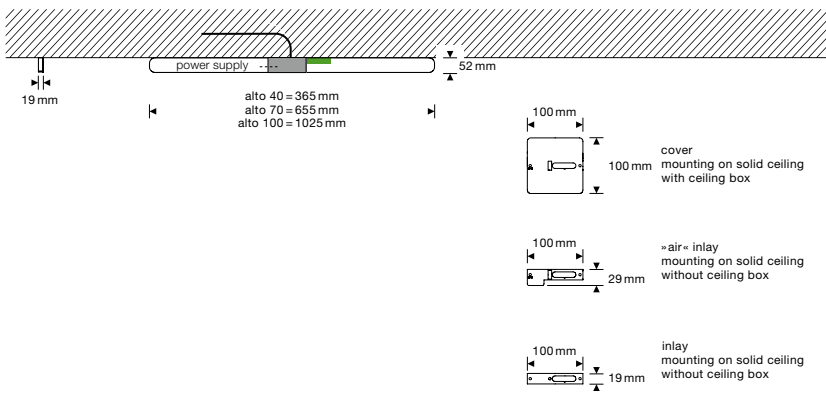

alto pure
for recessed mounting with plastering element with
integrated power supply

 integrated set box (standard),
»air« box optional or DALI box

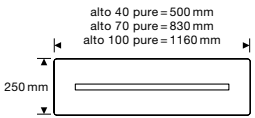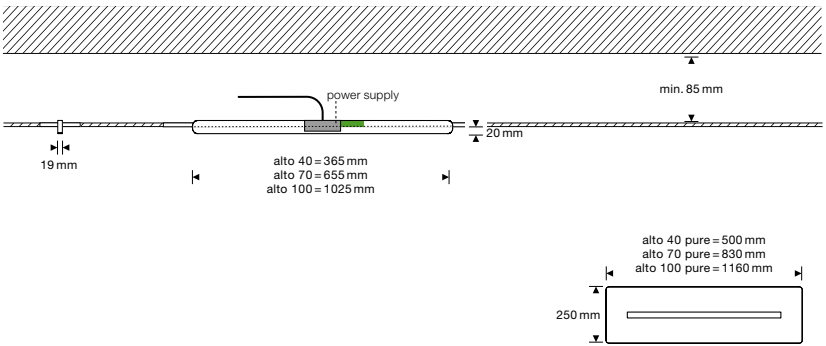


Mito alto side mounting options

alto side flat
for hollow ceiling mounting with remote power supply

recommended wall distance
for homogenous wall illumination:

approx. 70 cm at 250 cm room height
approx. 85 cm at 300 cm room height

 inclusive set box (standard),
optional mit »air« box oder DALI box

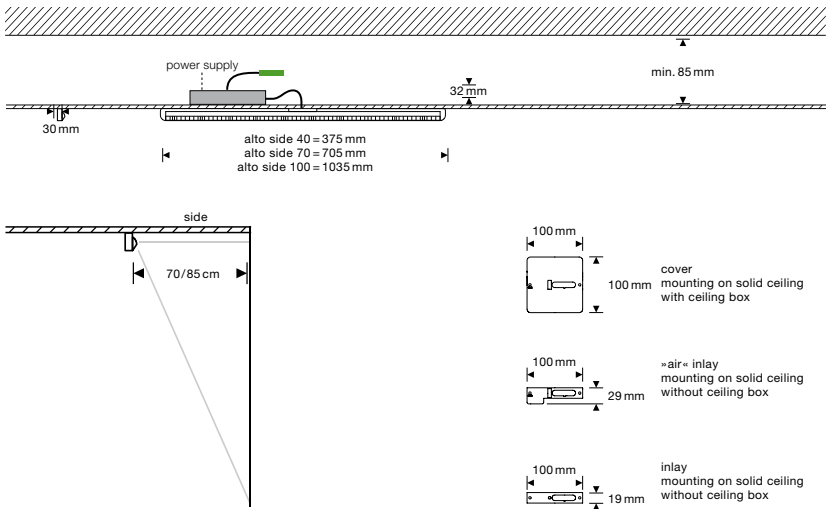


alto side pure
for recessed mounting with plastering element with integrated power supply

recommended wall distance
for homogenous wall illumination:

approx. 70 cm at 250 cm room height
approx. 85 cm at 300 cm room height


 integrated set box (standard),
»air« box optional or DALI box

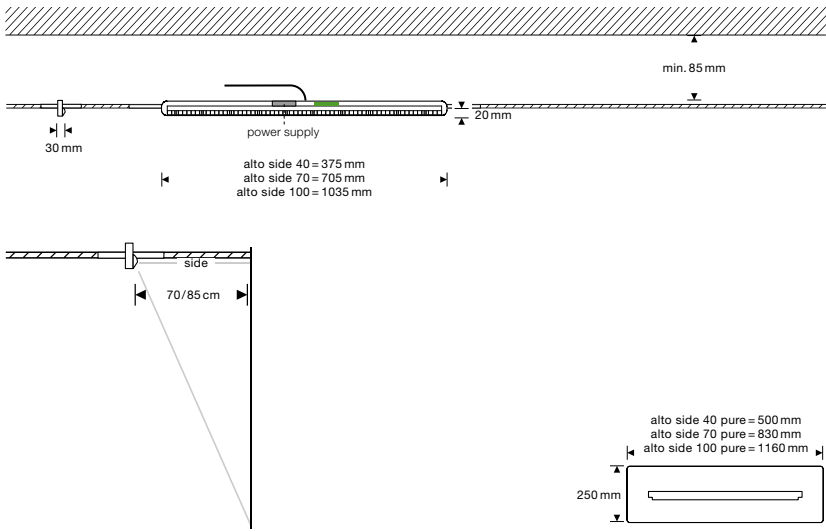

recommended wall distance
for homogenous wall illumination:

approx. 70 cm at 250 cm room height
approx. 85 cm at 300 cm room height





 integrated set box (standard),
»air« box optional or DALI box

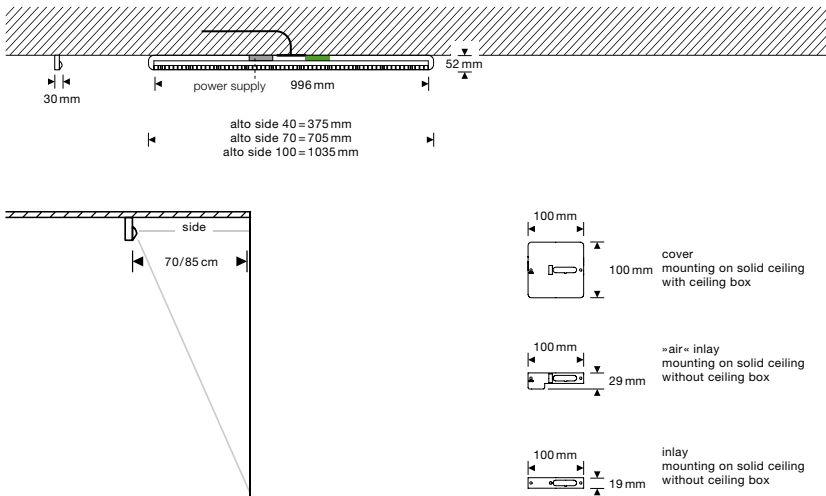

Mito linear technical data

version »color tune«	connection	U	230 V AC				
		W	volo 100 – 45 W volo 140 – 60 W alto/alto side 40 – 15 W alto/alto side 70 – 30 W alto/alto side 100 – 45 W terra – 70 W (56 W materials, phantom)				
	average service life	t	> 50.000 h				
	energy efficiency class	EEK	G				
	LED		high color		x-tra warm		
	color temperature	T	2700–4000 K		2200–3500 K		
	Color Rendering Index	CRI	Ra 95		Ra 95		
	recommended use		residential, public and office		residential		
	power	P	15 W	30 W	45 W	56 W	60 W
	luminous flux luminaire	φ				(materials, phantom)	70 W (colors)
	volo						
	lighting effect table (wide)				2900 lm		3900 lm
	lighting effect room (narrow)				2800 lm		3700 lm
	alto						
	lighting effect wide		800 lm	1600 lm	2400 lm		
	lighting effect narrow		800 lm	1600 lm	2400 lm		
	alto side						
	lighting effect wallwash		800 lm	1600 lm	2400 lm		
	terra/terra table top/terra 3d						
	lighting effect table (wide)					3600 lm	4600 lm


Mito linear control

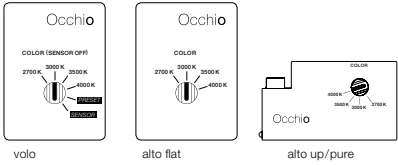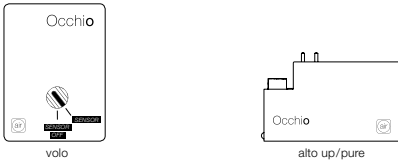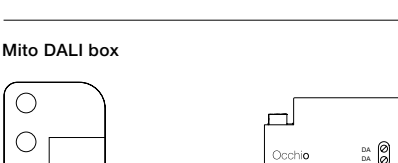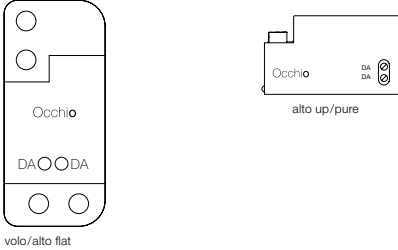control		Mito linear luminaires can be dimmed via »touchless control« (volo, terra), »body sensor« (terra) and Occhio air (standard for terra; optional for volo, alto). Alternatively dimming via trailing-edge phase cut* or DALI is possible (not terra).	
Mito set box		volo COLOR (sensor off) adjustable color temperature (4 steps), trailing-edge phase cut dimming* possible	alto COLOR adjustable color temperature (4 steps) trailing-edge phase cut dimming* possible
		PRESET adjustable color temperature (4 steps), adjustable up/downlight ratio (5 steps)	SENSOR »touchless control« (gesture control), switching, dimming, »up/down fading«, »color tune« (color temperature continuously adjustable), no external dimming possible
Mito »air« box			 Occhio air control via Bluetooth—switching, dimming, »up/down fading« (volo, terra) and »color tune« of individual luminaires, groups and scenes.
		volo SENSOR »air« + »touchless control« (Bluetooth and gesture control), control via »touchless control« and Occhio air app or »air« controller, switching, dimming, »up/down fading«, »color tune« (color temperature continuously adjustable)	alto »air« (Bluetooth control), control via Occhio air app or »air« controller, switching, dimming, »color tune« (color temperature continuously adjustable)
		SENSOR OFF »air« (Bluetooth control), control via Occhio air app or »air« controller, switching, dimming, »up/down fading«, »color tune« (color temperature continuously adjustable)	terra/terra 3d/terra table top Bluetooth control integrated in power supply »air« + »touchless control« (Bluetooth and gesture control) and »body sensor«, control via »touchless control«, »body sensor« and Occhio air app or »air« controller, switching, dimming, »up/down fading«, »color tune« (color temperature continuously adjustable)
		»ambient light control« adaption to ambient light	»presence sensor« presence recognition and automatic switch-off via motion sensor
control and sensors via Occhio »air«, App deactivable and adjustable		No external dimming possible with Mito »air« box	
Mito DALI box			control via DALI
volo – adjustable color temperature** – continuously dimmable – uplight and downlight separately controllable (two DALI addresses required) – no »touchless control«, no »up/down fading«		alto – adjustable color temperature** – continuously dimmable	
*compatible dimmers: www.occhio.com/dim		**A DALI controller »DALI device type 8 (DT8)« is required to control the light color. Further information can be found at www.occhio.com/dali	

X series

Gioia

New Horizons – infinite mobility, fascinating weightlessness and an almost sculptural appearance. Gioia, that means joy – joy in the magic of perfect light.

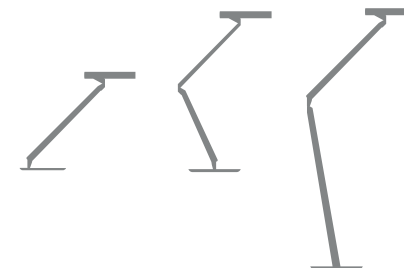

Gioia
table luminaires



tavolo



equilibrio

Gioia
reading luminaire




lettura

	height head adjustable: 28–75 cm, ø head 30 cm, 30 W (1830 lm), head and body 360° rotatable	height head adjustable: 62–96 cm, ø head 30 cm, 30 W (1830 lm), head and body 360° rotatable	height head adjustable: 120–166 cm, ø head 30 cm, 30 W (1830 lm), head and body 360° rotatable
colors	2.084,03	3.008,40	3.344,54
materials	+168,07		+168,07
phantom/black phantom	+252,10		+252,10
control	features »color tune«, »up/down fading«, »focus light«, switch- and dimmable via »touchless control«, additionally controllable via Occhio air (included)	Occhio air  Bluetooth control integrated in power supply. features controllable via Occhio air app or »air« controller, no external dimming	
options	light source »color tune« 2700 K–4000 K lighting effects (switchable)  uplight: flood downlight: wide asymmetric  + »focus light«	desk mount (only Gioia tavolo) for inserted mounting in table tops, thickness 10–45 mm - 134,45	surfaces head/body+base colors matt white/matt white matt black/matt black matt silver/matt black matt gold/matt white matt gold/matt black  materials/phantom/black phantom rose gold/matt black bronze/matt black phantom/matt black black phantom/matt black  The surfaces rose gold, bronze, phantom and black phantom may differ slightly from other product lines.
further options	These and further options can be configured at Occhio Digital Order System (DOS)		further information - technical data, information on control and mounting options view pages 120–121

Gioia mounting options

desk mount (optional for Gioia tavolo)
for inserted mounting in table tops,
thickness 10–45 mm

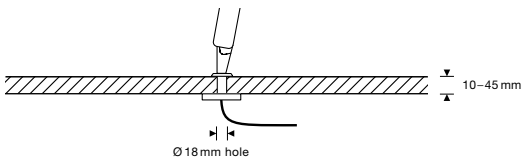

-134,45

Gioia technical data and control

version »color tune«	connection	U	230 V AC
		W	30 W
	average service life	t	> 50.000 h
	energy efficiency class	EEK	G
LED			high color
color temperature	T		2700–4000 K
Color Rendering Index	CRI		Ra 95
recommended use			residential, public and office
power	P		24 W (LED)
luminous flux luminaire	φ		
lighting effect switchable			
lighting effect wide			1830 lm
lighting effect »focus light«			610 lm

control

Gioia luminaires can be dimmed via »touchless control« and Occhio air (standard).
A second »touchless control« sensor allows to switch the lighting effect between wide and »focus light«.

Gioia »air« box (standard)



*Occhio air
powered by
Casambi*

 **Occhio air** control via Bluetooth—switching, dimming, »up/down fading«
and »color tune« of individual luminaires, groups and scenes as well as »focus light«

Taglio tavolo/tavolo fix
Bluetooth control integrated in power supply »air«
+ »touchless control« (Bluetooth and gesture control)
control via »touchless control« and Occhio air app or
»air« controller, switching, dimming, »up/down fading«,
»color tune« (color temperature continuously adjustable),
»focus light« (switchable lighting effect)

control and sensors via Occhio air,
app deactivable and adjustable

No external dimming

X series

Taglio

Absolute clarity: striking, linear design combined with fascinating mobility and maximum »joy of use« create focus on the essence.



Taglio

table luminaires



tavolo fix




tavolo

		height head: 52 cm, head 47 cm, 20 W (790 lm), head and body 360° rotatable				height head adjustable: 33–72 cm head 47 cm, 20 W (790 lm), head and body 360° rotatable	
colors	789,92				1.159,66		
materials	+ 84,03				+ 84,03		
phantom/black phantom	+ 126,05				+ 126,05		
control	features »color tune«, »up/down fading«, switch- and dimmable via »touchless control«, additionally controllable via Occhio air (optional)		Occhio air (optional)  Bluetooth control integrated in power supply, features controllable via Occhio air app or »air« controller, no external dimming + 82,35				
options	light source »color tune« 2700 K–4000 K lighting effects  uplight: flood downlight: wide asymmetric	desk mount for inserted mounting in table tops, thickness 10–45 mm - 134,45	surfaces	head/body+base colors matt white/matt white matt black/matt black matt silver/matt black matt gold/matt white matt gold/matt black 	materials/phantom/black phantom rose gold/matt black bronze/matt black phantom/matt black black phantom/matt black 		The surfaces rose gold, bronze, phantom and black phantom may differ slightly from other product lines.
further options	These and further options can be configured at Occhio Digital Order System (DOS)		further information		- technical data, information on control and mounting options view pages 126–127		

Taglio mounting options

desk mount (optional)
for inserted mounting in table tops,
thickness 10–45 mm

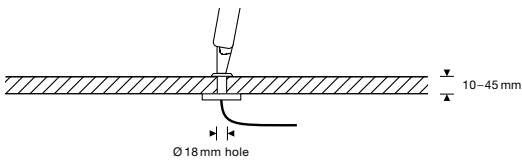

-134,45

Taglio technical data and control

version »color tune«

connection	U	230 V AC
	W	20 W
average service life	t	> 50.000 h
energy efficiency class	EEK	G

LED		high color
color temperature	T	2700–4000 K
Color Rendering Index	CRI	Ra 95
recommended use		residential, public and office

power	P	15 W (LED)
luminous flux luminaire	φ	

100 % downlight	790 lm
100 % uplight	360 lm
up+downlight	690 lm

control

Taglio luminaires can be dimmed via »touchless control« and Occhio air.

Taglio »air« box



*Occhio air
powered by
Casambi*

 **Occhio air** control via Bluetooth – switching, dimming, »up/down fading« and »color tune« of individual luminaires, groups and scenes.

Taglio tavolo/tavolo fix
Bluetooth control integrated in power supply »air«
+ »touchless control« (Bluetooth and gesture control)
control via »touchless control« and Occhio air app or
»air« controller, switching, dimming, »up/down fading«,
»color tune« (color temperature continuously adjustable)


control and sensors via Occhio air, app deactivable and adjustable

No external dimming

L series


Sento

The innovative, modular luminaire system for residential and public areas. With Sento you can define light precisely and thus make your own design statement.

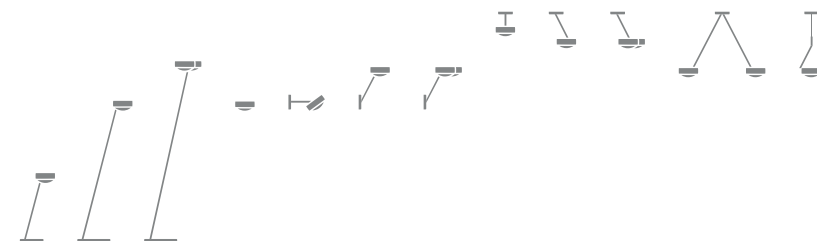

Sento

table- and floor luminaires

  									
head 360° rotatable body turnable (can be fixed) incl. plug-in power supply									
tavolo		60 cm swivel range 40°  can be synced via Occhio air	80 cm swivel range 40°	125 cm swivel range 18°  can be synced via Occhio air	160 cm swivel range 12°	terra		180 cm swivel range 12°  can be synced via Occhio air	
versions									
	18 W (1170 lm)	chrome/colors	1.242,02	1.302,52	1.445,38	1.537,82	2 × 26 W (2 × 1620 lm)		2.453,78
		materials	+ 67,23						+ 134,45
		phantom/black phantom	+ 100,84						+ 201,68
E diffusor glass/lens 80°									
	18 W (1270 lm)	chrome/colors	1.290,76	1.351,26	1.494,12	1.586,55	2 × 26 W (2 × 1620 lm)		2.551,26
		materials	+ 67,23						+ 134,45
		phantom/black phantom	+ 100,84						+ 201,68
D lens 80°									
orientation: left/right selectable			orientation: left/right selectable						
									
control									
features		Occhio air 		inserts					
»up/down fading« (with double-sided light output), switchable and dimmable via »touchless control« or Occhio air (optional), power 18/26 W switchable (tavolo and lettura only 18 W)		Bluetooth control integrated directly in the head, features via Occhio air app or »air« controller (optional)		 filter red 35,29		 soft edge glass (for lens) 28,57		light cone with soft contour approx. 80°	
				 filter green		 satinised glass (for lens) 18,49		light cone with soft contour approx. 100°	
				 filter blue					
				 filter yellow					
				 filter magenta					
				(max. 18 W)					
options									
light source		surfaces							
2700 K or 3000 K, perfect color LED CRI 97		head		materials		phantom/black phantom		body/base	
		chrome/colors							
									
									
									
									
									
The surfaces rose gold, bronze, phantom and black phantom may differ slightly from other product lines.									
further options									
- further lighting effects view page 144 - accessories for Occhio air from page 260			These and further options can be configured at Occhio Digital Order System (DOS)			further information			
						- technical data and information on control view page 145			

Sento

wall luminaires



verticale

head 360° rotatable		up/flat		20 cm, up/flat swivel range 105°	30 cm, up/flat swivel range 115°	40 cm, up/flat swivel range 140°
		🔌 can be synced via Occhio air		🔌 can be synced via Occhio air		
versions						
	26 W (1620 lm)	chrome/colors	695,80	826,89	836,97	848,74
		materials	+67,23	+67,23		
		phantom/black phantom	+100,84	+100,84		
E diffusor glass/lens 80°						
	26 W (1750 lm)	chrome/colors	744,54	875,63	885,71	897,48
		materials	+67,23	+67,23		
		phantom/black phantom	+100,84	+100,84		
D lens/lens 80°/80°						
	26 W (1570 lm)	chrome/colors	603,36	734,45	744,54	756,30
		materials	+67,23	+67,23		
		phantom/black phantom	+100,84	+100,84		
C lens 80°						
with carbon handle (incl.)		orientation: left/right selectable (view from above) L R				
with fixing ring (price reduction)						
control	features	Occhio air		inserts		
	»up/down fading« (with double-sided light output), switchable and dimmable via »touchless control« (can be deactivated) or Occhio air (optional), alternatively dimmable via trailing-edge phase cut dimmer	Bluetooth control integrated in the head, features via Occhio air app or »air« controller (optional), no external dimming		filter red filter green filter blue filter yellow filter magenta 35,29 (max. 18 W) soft edge glass (for lens) light cone with soft contour approx. 80° 28,57 satinised glass (for lens) light cone with soft contour approx. 100° 18,49		
		+82,35				
options	light source	mounting options		surfaces		
	2700 K or 3000 K, perfect color LED CRI97	up with integrated converter for surface mounting, through-wiring possible	flat with flat base for hollow wall with cavity box (incl. remote converter)	head chrome/colors shiny chrome matt chrome glossy white matt white matt black matt gold matt gold rose gold bronze phantom black phantom phantom/black phantom phantom black phantom body/base shiny chrome matt chrome shiny chrome/glossy white matt white matt black phantom/black phantom phantom black phantom The surfaces rose gold, bronze, phantom and black phantom may differ slightly from other product lines.		
further options	- further lighting effects view page 144 - further mounting accessories view page 142 - accessories for Occhio air from page 260	These and further options can be configured at Occhio Digital Order System (DOS)		further information - technical data, information on control and mounting options view pages 143–145		

Sento

wall luminaires



parete singolo



parete doppio

head 360° rotatable		20 cm, up/flat swivel range 120°	30 cm, up/flat swivel range 120°	40 cm, up/flat swivel range 120°					20 cm, up/flat swivel range 120°	30 cm, up/flat swivel range 120°	40 cm, up/flat swivel range 120°			
		🔌 can be synced via Occhio air							🔌 can be synced via Occhio air					
versions														
	26 W (1620 lm)	chrome/colors	826,89	836,97	848,74				2 x 26 W (2 x 1620 lm)	1.452,10	1.458,82	1.468,91		
		materials	+67,23							+134,45				
		phantom/black phantom	+100,84							+201,68				
E diffusor glass/lens 80°														
	26 W (1750 lm)	chrome/colors	875,63	885,71	897,48				2 x 26 W (2 x 1750 lm)	1.549,58	1.556,30	1.566,39		
		materials	+67,23							+134,45				
		phantom/black phantom	+100,84							+201,68				
D lens/lens 80°/80°														
	26 W (1570 lm)	chrome/colors	734,45	744,54	756,30				2 x 26 W (2 x 1570 lm)	1.267,23	1.273,95	1.284,03		
		materials	+67,23							+134,45				
		phantom/black phantom	+100,84							+201,68				
C lens 80°														
control	features		Occhio air			inserts								
	»up/down fading« (with double-sided light output), switchable and dimmable via »touchless control« (can be deactivated) or Occhio air (optional), dimmable via trailing-edge phase cut dimmer		Bluetooth control integrated in the head, features via Occhio air app or »air« controller (optional), no external dimming			 filter red filter green filter blue filter yellow filter magenta			 soft edge glass (for lens) light cone with soft contour approx. 80° satinised glass (for lens) light cone with soft contour approx. 100°					
			+82,35			35,29 (max. 18 W)			28,57 18,49					
options	light source		mounting options			surfaces								
	2700 K or 3000 K, perfect color LED CRI 97		up with integrated converter for surface mounting, through-wiring possible			flat with flat base for hollow wall with cavity box (incl. remote converter)			body/base					
						head chrome/colors			phantom/black phantom					
					shiny chrome matt chrome glossy white matt white matt black			materials			body/base			
					matt gold matt gold			phantom black phantom			shiny chrome matt chrome shiny chrome/glossy white matt white matt black			
					rose gold bronze									
The surfaces rose gold, bronze, phantom and black phantom may differ slightly from other product lines.														
further options	- further lighting effects view page 144 - further mounting accessories view page 142 - accessories for Occhio air from page 260			These and further options can be configured at Occhio Digital Order System (DOS)			further information		- technical data, information on control and mounting options view pages 143–145					

Sento

ceiling luminaires



soffitto singolo



soffitto doppio

head 360° rotatable body 180° rotatable		30 cm, up/flat swivel range 120°		40 cm, up/flat swivel range 120°		60 cm, up/flat swivel range 120°		80 cm, up/flat swivel range 90°		30 cm, up/flat swivel range 120°		40 cm, up/flat swivel range 120°		60 cm, up/flat swivel range 120°		80 cm, up/flat swivel range 90°	
		📶 can be synced via Occhio air															
versions																	
	26 W (1620 lm)	chrome/colors	877,31	889,08	910,92	929,41	2 x 26 W (2 x 1620 lm)		1.499,16	1.509,24	1.531,09	1.554,62					
		materials	+67,23														
		phantom/black phantom	+100,84														
E diffusor glass/lens 80°																	
	26 W (1750 lm)	chrome/colors	926,05	937,82	959,66	978,15	2 x 26 W (2 x 1750 lm)		1.596,64	1.606,72	1.628,57	1.652,10					
		materials	+67,23														
		phantom/black phantom	+100,84														
D lens/lens 80°/80°																	
	26 W (1570 lm)	chrome/colors	784,87	796,64	818,49	836,97	2 x 26 W (2 x 1570 lm)		1.314,29	1.324,37	1.346,22	1.369,75					
		materials	+67,23														
		phantom/black phantom	+100,84														
C lens 80°																	
control		features				Occhio air 				inserts							
		»up/down fading« (with double-sided light output), switchable and dimmable via »touchless control« (can be deactivated) or Occhio air (optional), dimmable via trailing-edge phase cut dimmer				Bluetooth control integrated in the head, features via Occhio air app or »air« controller (optional), no external dimming				 filter red 35,29  filter green  filter blue  filter yellow  filter magenta (max. 18 W)							
						+82,35				 soft edge glass (for lens) light cone with soft contour approx. 80° 28,57  satinised glass (for lens) light cone with soft contour approx. 100° 18,49							
options		light source				mounting options				surfaces							
		2700 K or 3000 K, perfect color LED CRI 97				up  with integrated converter for surface mounting, through-wiring possible				flat  with flat base for hollow ceiling with cavity box (incl. remote converter)				head chrome/colors shiny chrome  matt chrome  glossy white  matt white  matt black  materials      phantom/black phantom   body/base     			
										The surfaces rose gold, bronze, phantom and black phantom may differ slightly from other product lines.							
further options		- further lighting effects view page 144 - further mounting accessories view page 142 - accessories for Occhio air from page 260				These and further options can be configured at Occhio Digital Order System (DOS)				further information				- technical data, information on control and mounting options view pages 143–145			

Sento

ceiling luminaires



soffitto due



soffitto due

head 360° rotatable body 180° rotatable		30 cm, up/flat swivel range 2 × 60°  can be synced via Occhio air		40 cm, up/flat swivel range 2 × 60°		60 cm, up/flat swivel range 2 × 60°		80 cm, up/flat swivel range 2 × 45°  can be synced via Occhio air		100 cm, up/flat swivel range 2 × 45°		125 cm, up/flat swivel range 2 × 45°		
versions														
	2 × 26 W (2 × 1620 lm)	chrome/colors	1.606,72		1.633,61		1.675,63		2 × 26 W (2 × 1620 lm)	1.721,01		1.774,79		1.833,61
		materials	+ 134,45							+ 134,45				
		phantom/black phantom	+ 201,68								+ 201,68			
E diffusor glass/lens 80°														
	2 × 26 W (2 × 1750 lm)	chrome/colors	1.704,20		1.731,09		1.773,11		2 × 26 W (2 × 1750 lm)	1.818,49		1.872,27		1.931,09
		materials	+ 134,45							+ 134,45				
		phantom/black phantom	+ 201,68								+ 201,68			
D lens/lens 80°/80°														
	2 × 26 W (2 × 1570 lm)	chrome/colors	1.421,85		1.448,74		1.490,76		2 × 26 W (2 × 1570 lm)	1.536,13		1.589,92		1.648,74
		materials	+ 134,45							+ 134,45				
		phantom/black phantom	+ 201,68								+ 201,68			
C lens 80°														
control		features		Occhio air 				inserts						
		»up/down fading« (with double-sided light output), switchable and dimmable via »touchless control« (can be deactivated) or Occhio air (optional), dimmable via trailing-edge phase cut dimmer		Bluetooth control integrated in the head, features via Occhio air app or »air« controller (optional), no external dimming				 filter red 35,29  filter green  filter blue  filter yellow  filter magenta (max. 18 W)						
				+ 82,35				 soft edge glass (for lens) 28,57 light cone with soft contour approx. 80°  satinised glass (for lens) 18,49 light cone with soft contour approx. 100°						
options		light source		mounting options				surfaces						
		2700 K or 3000 K, perfect color LED CRI 97		up  with integrated converter for surface mounting, through-wiring possible				head chrome/colors       matt gold  matt gold  rose gold  bronze  phantom  black phantom  phantom/black phantom   body/base     						
				with flat base for hollow ceiling with cavity box (incl. remote converter)				The surfaces rose gold, bronze, phantom and black phantom may differ slightly from other product lines.						
further options		- further lighting effects view page 144 - further mounting accessories view page 142 - accessories for Occhio air from page 260				These and further options can be configured at Occhio Digital Order System (DOS)				further information - technical data, information on control and mounting options view pages 143–145				

Sento

ceiling luminaires



faro

head and body 360° rotatable	10 cm, up/flat	20 cm, up/flat	30 cm, up/flat
	🔊 can be synced via Occhio air		

versions

	2 x 26 W (2 x 1620 lm)	chrome/colors	778,15	768,55	794,96
		materials	+67,23		
		phantom/black phantom	+100,84		
E					
diffusor glass/lens 80°					
	2 x 26 W (2 x 1750 lm)	chrome/colors	826,89	835,29	843,70
		materials	+67,23		
		phantom/black phantom	+100,84		
D					
lens/lens 80°/80°					
	2 x 26 W (2 x 1570 lm)	chrome/colors	685,71	694,12	702,52
		materials	+67,23		
		phantom/black phantom	+100,84		
C					
lens 80°					

control	features		
		Bluetooth control integrated in the head, features via Occhio air app or »air« controller (optional), no external dimming	
		+ 82,35	



filo

head and body 360° rotatable 🔊 can be synced via Occhio air	fix, up/flat cable length adjustable during mounting 80–180 cm	variable, up/flat continuous height adjustment 50–200 cm
---	--	--

26 W (1620 lm)			905,88	1.200,00
			+67,23	
			+100,84	
26 W (1750 lm)			954,62	1.248,74
			+67,23	
			+100,84	
26 W (1570 lm)			813,45	1.107,56
			+67,23	
			+100,84	
			longer version, fix (180–280 cm) configurable (surcharge)	

control	features	Occhio air 	inserts	filter red 35,29 filter green filter blue filter yellow filter magenta (max. 18 W)	soft edge glass (for lens) light cone with soft contour 28,57 satinised glass (for lens) light cone with soft contour approx. 100° 18,49	
		+ 82,35				

options

light source

2700 K or 3000 K, perfect color LED CRI 97

mounting options

up 

with integrated converter for surface mounting, through-wiring possible

flat 

with flat base for hollow ceiling with cavity box (incl. remote converter)

surfaces

head

chrome/colors

shiny chrome

matt chrome

glossy white

matt white

matt black

matt gold

matt gold

rose gold

bronze

phantom

black phantom

phantom/black phantom

shiny chrome

matt chrome

shiny chrome/glossy white


matt white

matt black

The surfaces rose gold, bronze, phantom and black phantom may differ slightly from other product lines.

further information	- further lighting effects view page 144 - further mounting accessories view page 142 - accessories for Occhio air from page 260	These and further options can be configured at Occhio Digital Order System (DOS)	further information	- technical data, information on control and mounting options view pages 143–145
---------------------	--	---	---------------------	--

Sento mounting accessories

sideways inlet (single- or double-sided) through-wiring set for all surface-mounted versions, H 7 mm, ø 76 mm (ø base 88 mm)		white	28,57
for all up doppio/duo surface-mounted versions, H 7 mm, ø 107 mm (ø base 108 mm)		white	38,66
canopy with outlet on one or both sides for all surface-mounted versions, H 15 mm, ø 88 mm		shiny chrome glossy white matt chrome matt white matt black	55,46
cable redirection for filo, H 18 mm, ø 15 mm		shiny chrome matt chrome matt white matt black	35,29
mirror assembly kit for mounting the luminaires Sento verticale/parete 20/30 cm directly on a mirror, (drilling diameter 70 mm), no possibility of revision of the power supply via mirrors for flat versions			43,70
fixing ring to avoid rotation of the head, instead of carbon handle		shiny chrome matt chrome matt white matt black	11,76
cavity box for mounting of flat luminaires in hollow ceilings and -walls			3,36
inserts (color filter only for heads 18 W)	filter red filter green filter blue filter yellow filter magenta		35,29
in combination with lens	soft edge glass (light cone with soft contour)		28,57
	satiniised glass (soft widening of the light cone approx. 100°)		18,49

Can be configured at **Occhio Digital Order System (DOS)**

Sento mounting options

head ø 123 mm, H 42 mm

up
with integrated power supply for surface mounting,
through-wiring possible.

Ⓢ synchronization of multiple luminaires via
»air« sync possible (prerequisite all luminaires
with »air« and same type)




Occhio air optional

flat
with flat base for cavity box,
remote power supply

Ⓢ synchronization of multiple luminaires via
»air« sync possible (prerequisite all luminaires
with »air« and same type)




Occhio air optional

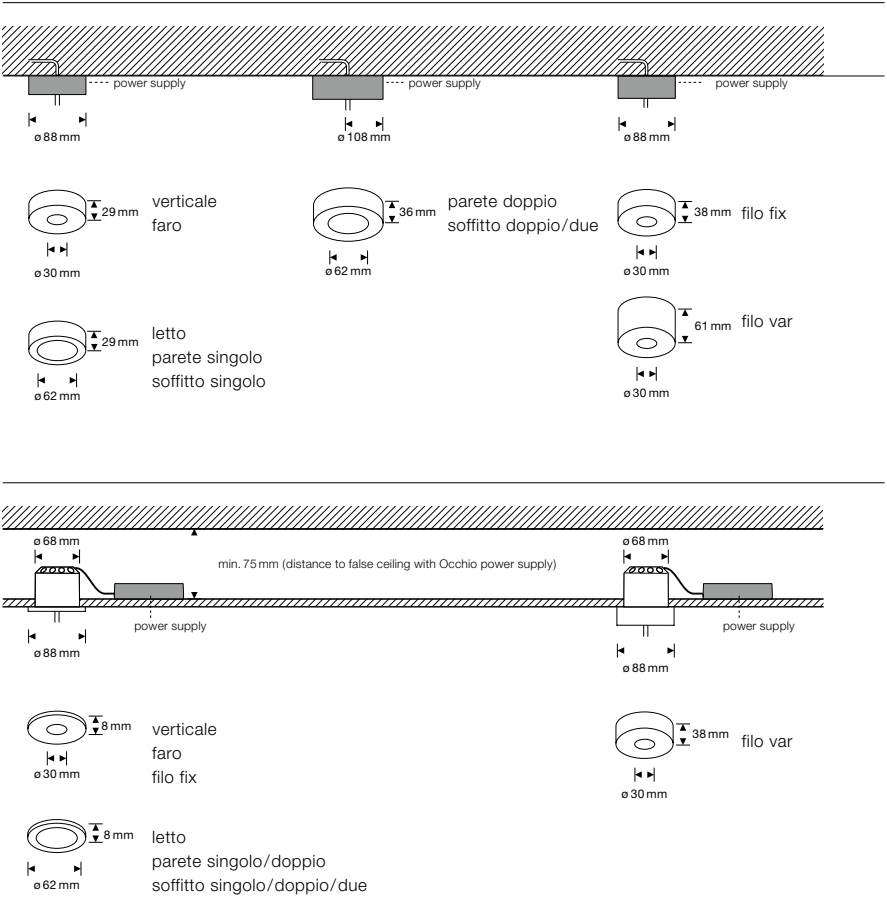

Sento lighting effects (can be configured)

head		+ soft edge glass	+ satinised glass
head with double-sided light output incl. »touchless control« (can be deactivated) with optional »air« control	 A diffusor glass/diffusor glass diffus/diffus		
	 D lens/lens 80°/80°	 D lens/lens + 2 x satinised glass 80°/80°	 D lens/lens + 2 x satinised glass 100°/100°
	 E diffusor glass/lens diffuse/80°	 E diffusor glass/lens + soft edge glass diffuse/80°	 E diffusor glass/lens + satinised glass diffus/100
head with single-sided light output with »touchless control« (can be deactivated) or with optional »air« control	 B diffusor glass diffus		
	 C lens 80°	 C lens + soft edge glass 80°	 C lens + satinised glass 100°
	 S40 double lens + soft edge glass 40° (not combinable with other inserts)		
	 S30 double lens + Fresnel-lens 30° (not combinable with other inserts)		

Sento technical data and control


version »touchless control«	connection	U	230 V AC
	average service life	t	> 50.000 h
	energy efficiency class	EEK	G
	LED		perfect color
	color temperature Color Rendering Index recommended use	T CRI	2700 K, 3000 K Ra 97 residential and public
	power	P	perfect color
	luminous flux luminaire	φ	18 W 26 W
	lighting effects A		1090 lm 1500 lm
	lighting effects B		1000 lm 1370 lm
	lighting effects C		1140 lm 1570 lm
	lighting effects D		1270 lm 1750 lm
	lighting effects E		1170 lm 1620 lm
	lighting effects S40		1130 lm 1560 lm
	lighting effects S30		1110 lm 1530 lm
control	with Occhio power supply The Occhio converter is perfectly matched to these requirements and can be dimmed by trailing-edge phase cut dimmer*. Can not be used in conjunction with »touchless control« or Occhio air.		
	table/floor luminaires (Sento tavolo, Sento lettura, Sento terra) Sento tavolo and lettura come with a plug-in power supply (max. 18 W, tavolo, lettura). Sento terra comes with a controller and touch surfaces (max. 2 x 26 W). The luminaires can be switched or dimmed on the luminaire head additionally via the controller and foot switch (only terra).		
 <i>Occhio air powered by Casambi</i>	 Occhio air control via Bluetooth – switching, dimming, »up/down fading« of individual luminaires, groups and scenes.		
touchless dimm function Sento luminaire heads 	18 W/26 W light power is adjustable to 18 W or 26 W, 18 W recommended for arm's area, 26 W not recommended for arm's reach (heat development).**		
	SENSOR OFF luminaires are dimmed using remote trailing-edge phase cut dimmers* (except floor and table luminaires) or controlled with Occhio air (optional) (switching, dimming, »up/down fading«).		
	SENSOR DIM luminaires can be controlled touchlessly »touchless control« via simple gestures control function integrated in the head or by Occhio air (optional) (switching, dimming, »up/down fading«).		
	SENSOR STEP this setting enables the up/down ratio and brightness to be preconfigured and saved. Additionally dimmable via trailing-edge phase cut dimmer*.		

*compatible dimmers: [occhio.com/dim](https://www.occhio.com/dim)
**Sento tavolo, Sento lettura only with 18 W

L series

Sento sospeso

Completed in design, with sophisticated operating functions
and an incomparable height adjustment: is the essence of highest
quality of light.

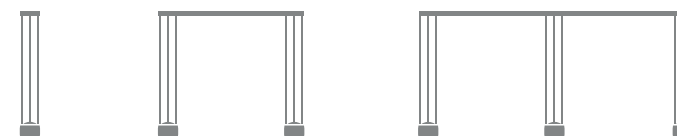


Sento sospeso

suspended luminaires



flat

pure

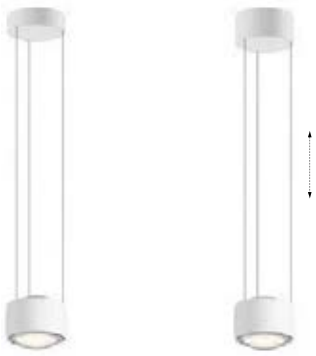

up

fix cable length adjustable during mounting max. 350 cm		fix for hollow ceiling incl. remote converter	variable	fix for flush ceiling-mounted installation (mounting board) incl. converter	variable	fix for surface-mounted installation through-wiring possible	variable			
variable continuous height adjustment 50–200 cm		📶 can be synced via Occhio air		📶 can be synced via Occhio air		📶 can be synced via Occhio air				
versions										
	32 W (1940 lm) 26 W (1580 lm)	chrome/colors shiny chrome	1.242,02	1.620,17	1.366,39	1.744,54	32 W (1940 lm) 26 W (1580 lm)	1.252,10	1.630,25	
	26 W (1580 lm)	materials	+ 134,45		+ 117,65		26 W (1580 lm)	+ 134,45		
	26 W (1580 lm)	phantom/ black phantom	+ 201,68		+ 176,47		26 W (1580 lm)	+ 201,68		
E uplight diffusor glass/ downlight lens 80° + soft edge glass										
	32 W (2070 lm) 26 W (1690 lm)	chrome/colors shiny chrome	1.319,33	1.697,48	1.443,70	1.821,85	32 W (2070 lm) 26 W (1690 lm)	1.329,41	1.707,56	
	26 W (1690 lm)	materials	+ 134,45		+ 117,65		26 W (1690 lm)	+ 134,45		
	26 W (1690 lm)	phantom/ black phantom	+ 201,68		+ 176,47		26 W (1690 lm)	+ 201,68		
D up-/downlight lens 80° + soft edge glass										
🕒 special length up to 1000 cm possible (extra charge per head: + 142,86, non discountable)										
control		features		Occhio air 						
		»up/down fading«, switching, dimming via »touchless control« (can be deactivated) and Occhio air (optional), alternatively dimmable via trailing-edge phase cut dimmer		Bluetooth control integrated in luminaire heads, features via Occhio air app or »air« controller (optional) controllable, no external dimming possible + 82,35						
options		light source				surfaces		head/base*		
		2700 K or 3000 K, perfect color LED CRI 97						chrome		
								shiny chrome  matt chrome 		
								colors		
								glossy white  matt white  matt black  matt gold 		
								materials/phantom		
								rose gold  bronze  phantom  black phantom 		
								*for pure: base always matt white The surfaces rose gold, bronze, phantom and black phantom may differ slightly from other product lines.		
further options		- further mounting accessories view page 152 - accessories for Occhio air from page 260			These and further options can be configured at Occhio Digital Order System (DOS)		further information		- technical data, information on control and mounting options view pages 153–154	

Sento sospeso

suspended luminaires




due



tre

fix fix cable length adjustable during mounting max. 350 cm		fix for surface-mounted installation through-wiring possible		variable variable continuous height adjustment 50–200 cm		variable for surface-mounted installation through-wiring possible	
				Ⓢ the luminaire heads are synced via an internal control wire		Ⓢ the luminaire heads are synced via an internal control wire	
versions							
	2 × 32 W (2 × 1940 lm) 2 × 26 W (2 × 1580 lm)	chrome/colors shiny chrome	3.341,18		4.097,48	3 × 32 W (3 × 1940 lm) 3 × 26 W (3 × 1580 lm)	5.068,91 6.203,36
	2 × 26 W (2 × 1580 lm)	materials	+ 235,29			3 × 26 W (3 × 1580 lm)	+ 352,94
	2 × 26 W (2 × 1580 lm)	phantom/ black phantom	+ 352,94			3 × 26 W (3 × 1580 lm)	+ 529,41
E uplight diffusor glass/ downlight lens 80° + soft edge glass							
	2 × 32 W (2 × 2070 lm) 2 × 26 W (2 × 1690 lm)	chrome/colors shiny chrome	3.495,80		4.252,10	3 × 32 W (3 × 2070 lm) 3 × 26 W (3 × 1690 lm)	5.300,84 6.435,29
	2 × 26 W (2 × 1690 lm)	materials	+ 235,29			3 × 26 W (3 × 1690 lm)	+ 352,94
	2 × 26 W (2 × 1690 lm)	phantom/ black phantom	+ 352,94			3 × 26 W (3 × 1690 lm)	+ 529,41
D up-/downlight lens 80° + soft edge glass							
Ⓢ special length up to 1000 cm possible (extra charge per head: + 142,86, non discountable)							
control		features		Occhio air 			
		»up/down fading«, switching, dimming via »touchless control« (deactivatable) and Occhio air (optional), alternatively dimmable via trailing-edge phase cut dimmer		Bluetooth control integrated in luminaire heads, features via Occhio air app or »air« controller (optional) controllable, no external dimming possible + 82,35			
options		light source		surfaces		head/canopy	
		2700 K or 3000 K, perfect color LED CRI 97				chrome shiny chrome/matt white  matt chrome/matt white 	
						colors glossy white/matt white  matt white/matt white  matt black/matt white  matt gold/matt white 	
						materials/phantom rose gold/matt white  bronze/matt white  phantom/matt white  black phantom/matt white 	
						The surfaces rose gold, bronze, phantom and black phantom may differ slightly from other product lines.	
further options		- further mounting accessories view page 152 - accessories for Occhio air from page 260		These and further options can be configured at Occhio Digital Order System (DOS)		further information - technical data, information on control and mounting options view pages 153–154	

Sento sospeso mounting accessories

sideways inlet (single- or double-sided) through-wiring set for all surface-mounted versions (except due/tre), H 7 mm, ø 107 mm (ø base 108 mm)		matt white	38,66
canopy with outlet on one or both sides for surface-mounted versions, H 15 mm, ø 88 mm		shiny chrome glossy white matt chrome matt white matt black	55,46
cavity box for mounting of flat luminaires in hollow ceilings and -walls			3,36

Sento sospeso mounting options

head: ø 123 mm, H 72 mm

up
with integrated power supply for surface mounting,
through-wiring possible.

- Ⓢ synchronization of multiple luminaires via »air« sync possible (prerequisite all luminaires with »air« and same type)



Occhio air optional

flat
with flat base for cavity box,
remote power supply,
installation depth: min. 30 mm, (min. 80 mm if the power
supply is installed through the luminaire's ceiling opening)

- Ⓢ synchronization of multiple luminaires via »air« sync possible (prerequisite all luminaires with »air« and same type)



Occhio air optional

due/tre
ceiling canopy with integrated power supply for
surface mounting, through-wiring possible

dimensions of ceiling canopy
due: L 1020 × W 120 × H 40 mm
tre: L 1920 × W 120 × H 40 mm
distance between bodies: 90 cm

- Ⓢ the luminaire heads are synced via
an internal control line




Occhio air optional

pure
with plastering element for flush ceiling-mounted
installation, remote power supply (optional),
installation depth: min. 30 mm, (min. 80 mm when
mounting power supply through luminaire opening)


- Ⓢ synchronization of multiple luminaires via »air« sync possible (prerequisite all luminaires with »air« and same type)



Occhio air optional

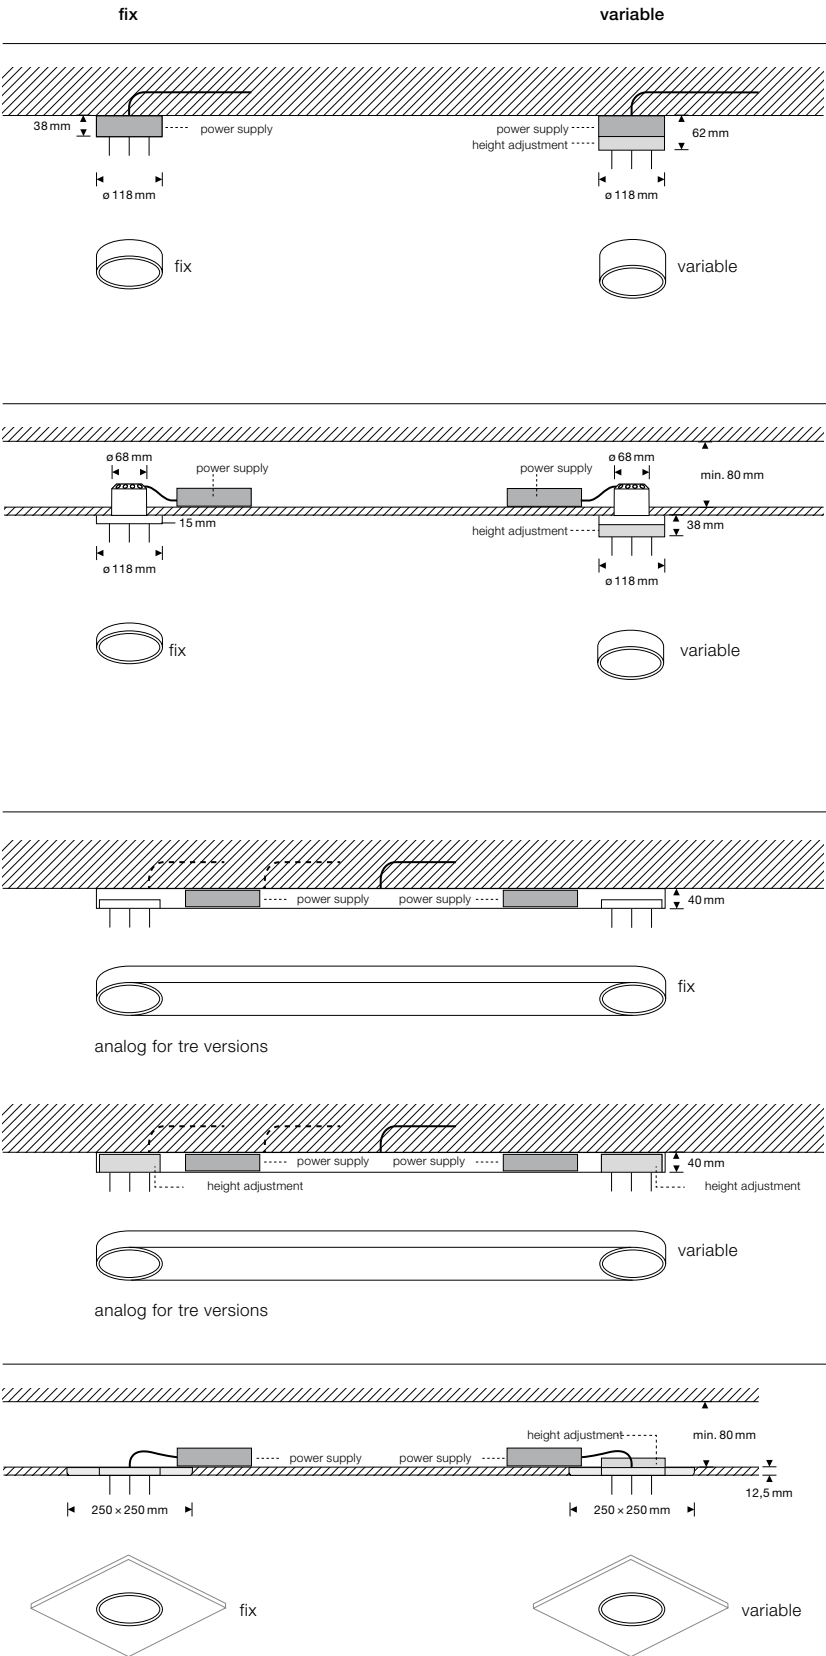

Sento sospeso technical data and control

version »touchless control«	connection			U	230 V AC
	average service life			t	> 50.000 h
	energy efficiency class			EEK	G
LED	color temperature			T	perfect color 2700 K, 3000 K
	Color Rendering Index			CRI	Ra 97
	recommended use				residential and public
power	perfect color				
	26 W				32 W
	luminous flux luminaire			P φ	
	lighting effects E				1580 lm
lighting effects E	lighting effects D				1940 lm
					2070 lm
control	with Occhio power supply				
	The Occhio converter is perfectly matched to these requirements and can be dimmed by trailing-edge phase cut dimmer*. Can not be used in conjunction with »touchless control« or Occhio air.				
Occhio air powered by Casambi	 Occhio air				
	control via Bluetooth – switching, dimming, »up/down fading« of individual luminaires, groups and scenes.				
touchless dim funktion Sento sospeso luminaire heads	SENSOR OFF				
	Luminaires can be dimmed via remote trailing-edge phase cut dimmers* or controlled via Occhio air (optional) (switching, dimming, »up/down fading«).				
SENSOR 	SENSOR DIM				
	Luminaires can be controlled via »touchless control« with simple gestures control function integrated in the head or via Occhio air (optional) (switching, dimming, »up/down fading«).				
	SENSOR STEP				
	This setting enables the up/down ratio and brightness to be preconfigured and saved. Additionally dimmable via trailing-edge phase cut dimmer*.				

* compatible dimmers: occhio.com/dim

L series

Più

The power of innovation – the modular spotlight system for holistic lighting design.



Più
ceiling spotlights



alto



alto v



R alto



R alto v

360° rotatable
for surface-mounted installation

swivel range 52°

non-swiveling

swivel range 52°

non-swiveling

versions



max. 26 W (1290 lm)

chrome/colors

579,83

406,72

materials

+ 67,23

phantom/black phantom

+ 100,84

C 80

80°/lens

versions



max. 26 W (1400 lm)

chrome/colors

573,11

400,00

materials

+ 67,23

phantom/black phantom

+ 100,84

C 80

80°/cone glass
+ small lens medium



max. 26 W (1030 lm)

chrome/colors

596,64

423,53

materials

+ 67,23

phantom/black phantom

+ 100,84

S 100

100°/lens
+ satinised glass



max. 26 W (1210 lm)

chrome/colors

589,92

416,81

materials

+ 67,23

phantom/black phantom

+ 100,84

S 100

100°/cone glass
+ soft edge glass + small lens flat



max. 26 W (1140 lm)

chrome/colors

596,64

423,53

materials

+ 67,23

phantom/black phantom

+ 100,84

S 80

80°/lens
+ soft edge glass



max. 26 W (1250 lm)

chrome/colors

589,92

416,81

materials

+ 67,23

phantom/black phantom

+ 100,84

S 80

80°/cone glass
+ soft edge glass + small lens medium



max. 26 W (1280 lm)

chrome/colors

613,45

440,34

materials

+ 67,23

phantom/black phantom

+ 100,84

S 40

40°/lens
+ soft edge glass + small lens medium



max. 26 W (1220 lm)

chrome/colors

598,32

425,21

materials

+ 67,23

phantom/black phantom

+ 100,84

S 40

40°/cone glass
+ Fresnel lens + small lens medium

control

features



230V light engine 26 W
(switchable 13/18/26 W)
dimmable via trailing-edge
phase cut dimmer

Occhio air module



Bluetooth dimming module for
mounting in hollow ceiling or switch
box (can be put in doppio base),
for max. 4 spotlights

82,35

Occhio air adapter



adapter ring incl. »air« module,
mounting under luminaire
(not for doppio),
matt black or matt white

110,92

inserts

- filter red
- filter green
- filter blue
- filter yellow
- filter magenta

33,61

(max. 18 W)

options

light source

2700 K or 3000 K, perfect color CRI97

surfaces

head/base
chrome

shiny chrome
glossy white/shiny chrome
matt chrome



colors

matt white
matt black
matt gold/matt white
matt gold/matt black



materials/phantom/black phantom

rose gold/matt black
bronze/matt black
phantom/matt black
black phantom/matt black



The surfaces rose gold, bronze, phantom and black phantom may differ slightly from other product lines.

further options

- further lighting effects view page 182
- further mounting accessories view page 174
- further accessories for Occhio air from page 260

These and further options can be configured at
Occhio Digital Order System (DOS)

further information

- technical data and information on mounting options view pages 176–183

Più
ceiling spotlights



alto doppio



R alto doppio

swivel range 52°
360° rotatable
for surface-mounted installation

versions



2 x 26 W (1290 lm)

chrome/colors

1.154,62

materials

+ 134,45

phantom/black phantom

+201,68

C 80

80°/lens



2 x 26 W (1030 lm)

chrome/colors

1.188,24

materials

+ 134,45

phantom/black phantom

+201,68

S 100

100°/lens
+ satinised glass



2 x 26 W (1140 lm)

chrome/colors

1.188,24

materials

+ 134,45

phantom/black phantom

+201,68

S 80

80°/lens
+ soft edge glass



2 x 26 W (1280 lm)

chrome/colors

1.221,85

materials

+ 134,45

phantom/black phantom

+201,68

S 40

40°/lens
+ soft edge glass + small lens medium

versions



2 x 26 W (1400 lm)

chrome/colors

1.141,18

materials

+ 134,45

phantom/black phantom

+201,68

C 80

80°/cone glass
+ small lens medium



2 x 26 W (1210 lm)

chrome/colors

1.174,79

materials

+ 134,45

phantom/black phantom

+201,68

S 100

100°/cone glass
+ soft edge glass + small lens flat



2 x 26 W (1250 lm)

chrome/colors

1.174,79

materials

+ 134,45

phantom/black phantom

+201,68

S 80

80°/cone glass
+ soft edge glass + small lens medium



2 x 26 W (1220 lm)

chrome/colors

1.191,60

materials

+ 134,45

phantom/black phantom

+201,68

S 40

40°/cone glass
+ Fresnel lens + small lens medium

control

features



230V light engine 26 W
(switchable 13/18/26 W)
dimmable via trailing-edge
phase cut dimmer

Occhio air module



Bluetooth dimming module for
mounting in hollow ceiling or switch
box (can be put in doppio base),
for max. 4 spotlights

82,35

inserts

- filter red
- filter green
- filter blue
- filter yellow
- filter magenta

33,61

(max. 18 W)

options

light source

2700 K or 3000 K, perfect color CRI97

surfaces

head/base
chrome

shiny chrome/matt white
matt chrome/matt white
glossy white/shiny chrome/
matt white



colors

matt white
matt black
matt gold/matt white
matt gold/matt black



materials/phantom/black phantom

rose gold/matt black
bronze/matt black
phantom/matt black
black phantom/matt black



The surfaces rose gold, bronze, phantom and black phantom may differ slightly from other product lines.

further options

- further lighting effects view page 182
- further mounting accessories view page 174
- further accessories for Occhio air from page 260

These and further options can be configured at
Occhio Digital Order System (DOS)

further information

- technical data and information on mounting options view pages 176–183

Più
ceiling spotlights



alto 3d



alto 3d doppio



R alto 3d



R alto 3d doppio

swivel range 90°
360° rotatable
for surface-mounted installation
through-wiring possible

versions*				versions*					
	max. 26 W (1290 lm)	chrome/colors	635,29	1.265,55		max. 26 W (1400 lm)	chrome/colors	628,57	1.252,10
		materials	+ 67,23	+ 134,45			materials	+ 67,23	+ 134,45
		phantom/black phantom	+ 100,84	+ 201,68			phantom/black phantom	+ 100,84	+ 201,68
	C 80					C 80			
80°/lens				80°/cone glass				+ small lens medium	
	max. 26 W (1030 lm)	chrome/colors	652,10	1.299,16		max. 26 W (1210 lm)	chrome/colors	645,38	1.285,71
		materials	+ 67,23	+ 134,45			materials	+ 67,23	+ 134,45
		phantom/black phantom	+ 100,84	+ 201,68			phantom/black phantom	+ 100,84	+ 201,68
	S 100					S 100			
100°/lens				100°/cone glass				+ soft edge glass + small lens flat	
+ satinised glass									
	max. 26 W (1140 lm)	chrome/colors	652,10	1.299,16		max. 26 W (1250 lm)	chrome/colors	645,38	1.285,71
		materials	+ 67,23	+ 134,45			materials	+ 67,23	+ 134,45
		phantom/black phantom	+ 100,84	+ 201,68			phantom/black phantom	+ 100,84	+ 201,68
	S 80					S 80			
80°/lens				80°/cone glass				+ soft edge glass + small lens medium	
+ soft edge glass									
	max. 26 W (1280 lm)	chrome/colors	668,91	1.332,77		max. 26 W (1220 lm)	chrome/colors	653,78	1.302,52
		materials	+ 67,23	+ 134,45			materials	+ 67,23	+ 134,45
		phantom/black phantom	+ 100,84	+ 201,68			phantom/black phantom	+ 100,84	+ 201,68
	S 40					S 40			
40°/lens				40°/cone glass				+ Fresnel lens + small lens medium	
+ soft edge glass + small lens medium									
*versions doppio: 2 x 26 W					*versions doppio: 2 x 26 W				

control	features	 Occhio air module	Bluetooth dimming module for mounting in hollow ceiling or switch box (can be put in doppio base), for max. 4 spotlights	 Occhio air adapter	adapter ring incl. »air« module, mounting under luminaire (not for doppio), matt black or matt white	33,61	filter red filter green filter blue filter yellow filter magenta	(max. 18 W)		
options	light source	2700 K or 3000 K, perfect color CRI 97			surfaces	head/body/base chrome	shiny chrome* matt chrome* glossy white/shiny chrome/ glossy white*	matt white matt black matt gold/matt white matt gold/matt black	rose gold/matt black bronze/matt black phantom/matt black black phantom/matt black	
further options	- further lighting effects view page 182 - further mounting accessories view page 174 - further accessories for Occhio air from page 260			These and further options can be configured at Occhio Digital Order System (DOS)		further information	- technical data and information on mounting options view pages 176–183			

Più
track spotlights



alto track



alto 3d track



R alto track



R alto 3d track

360° rotatable
in-trac adapter
for Onetrack by Eutrac or Stucchi

swivel range 52°

swivel range 90°

swivel range 52°

swivel range 90°

versions



max. 26 W (1290 lm)

chrome/colors

532,77

544,54

materials

+ 67,23

phantom/black phantom

+ 100,84

C 80

80°/lens

versions



max. 26 W (1400 lm)

chrome/colors

526,05

537,82

materials

+ 67,23

phantom/black phantom

+ 100,84

C 80

80°/cone glass
+ small lens medium



max. 26 W (1030 lm)

chrome/colors

549,58

561,34

materials

+ 67,23

phantom/black phantom

+ 100,84

S 100

100°/lens
+ satinised glass



max. 26 W (1140 lm)

chrome/colors

549,58

561,34

materials

+ 67,23

phantom/black phantom

+ 100,84

S 80

80°/lens
+ soft edge glass



max. 26 W (1280 lm)

chrome/colors

566,39

578,15

materials

+ 67,23

phantom/black phantom

+ 100,84

S 40

40°/lens
+ soft edge glass + small lens medium



max. 26 W (1210 lm)

chrome/colors

542,86

554,62

materials

+ 67,23

phantom/black phantom

+ 100,84

S 100

100°/cone glass
+ soft edge glass + small lens flat



max. 26 W (1250 lm)

chrome/colors

542,86

554,62

materials

+ 67,23

phantom/black phantom

+ 100,84

S 80

80°/cone glass
+ soft edge glass + small lens medium



max. 26 W (1220 lm)

chrome/colors

551,26

563,03

materials

+ 67,23

phantom/black phantom

+ 100,84

S 40

40°/cone glass
+ Fresnel lens + small lens medium

control

features



230V light engine 26 W
(switchable 13/18/26 W)
dimmable via trailing-edge
phase cut dimmer

inserts

- filter red
- filter green
- filter blue
- filter yellow
- filter magenta

33,61

(max. 18 W)

options

light source

2700 K or 3000 K, perfect color CRI97

surfaces

head/body* + adapter
chrome

shiny chrome/matt white
matt chrome
glossy white/shiny chrome/
matt white



colors

matt white
matt black
matt gold/matt white
matt gold/matt black



materials/phantom/black phantom

rose gold/matt black
bronze/matt black
phantom/matt black
black phantom/matt black



*body only for alto 3d
The surfaces rose gold, bronze, phantom and black phantom may differ slightly from other product lines.

further options

- further lighting effects view page 182
- accessories for Occhio air from page 260

These and further options can be configured at
Occhio Digital Order System (DOS)

further information

- technical data and information on mounting options view pages 176–183

Più spotlights

recessed spotlights



piano edge

piano cover round

piano cover square

360° rotatable, swivel range 30°

for recessed mounting with filigree ceiling edge

for recessed mounting installation with cover round

for recessed mounting installation with cover square

versions

	max. 26 W (1640 lm)	chrome/colors	361,34	463,87	463,87
		materials	+ 67,23	+ 84,03	
		phantom/black phantom	+ 100,84	+ 126,05	

C 80
80°/lens

	max. 26 W (1030 lm)	chrome/colors	378,15	480,67	480,67
		materials	+ 67,23	+ 84,03	
		phantom/black phantom	+ 100,84	+ 126,05	

S 100
100°/lens
+ satinised glass

	max. 26 W (1140 lm)	chrome/colors	378,15	480,67	480,67
		materials	+ 67,23	+ 84,03	
		phantom/black phantom	+ 100,84	+ 126,05	

S 80
80°/lens
+ soft edge glass

	max. 26 W (1280 lm)	chrome/colors	394,96	497,48	497,48
		materials	+ 67,23	+ 84,03	
		phantom/black phantom	+ 100,84	+ 126,05	

S 40
40°/lens
+ soft edge glass + small lens medium

can also be configured as pro version
excl. power supply at Digital Order System (DOS)

control	features	Occhio air module 
	 230V light engine 26 W (switchable 13/18/26 W) dimmable via trailing-edge phase cut dimmer	Bluetooth dimming module for mounting in hollow ceiling or switch box for max. 4 spotlights
		82,35

options	light source
	2700 K or 3000 K, perfect color CRI97 pro version also available in 4000 K, perfect color CRI97

further options

- further lighting effects view page 182

- accessories for Occhio air from page 260

These and further options can be configured at **Occhio Digital Order System (DOS)**



R piano edge

R piano cover round

R piano cover square

for recessed mounting with filigree ceiling edge

for recessed mounting installation with cover round

for recessed mounting installation with cover square

versions

	max. 26 W (1400 lm)	chrome/colors	354,62	457,14	457,14
		materials	+ 67,23	+ 84,03	
		phantom/black phantom	+ 100,84	+ 126,05	

C 80
80°/cone glass
+ small lens medium

	max. 26 W (1210 lm)	chrome/colors	371,43	473,95	473,95
		materials	+ 67,23	+ 84,03	
		phantom/black phantom	+ 100,84	+ 126,05	

S 100
100°/lens
+ satinised glass

	max. 26 W (1250 lm)	chrome/colors	371,43	473,95	473,95
		materials	+ 67,23	+ 84,03	
		phantom/black phantom	+ 100,84	+ 126,05	

S 80
80°/lens
+ soft edge glass

	max. 26 W (1220 lm)	chrome/colors	379,83	482,35	482,35
		materials	+ 67,23	+ 84,03	
		phantom/black phantom	+ 100,84	+ 126,05	

S 40
40°/lens
+ soft edge glass + small lens medium

can also be configured as pro version
excl. power supply at Digital Order System (DOS)

inserts	 filter red	33,61
	 filter green	
	 filter blue	
	 filter yellow	
	 filter magenta	
	(max. 18 W)	

surfaces	head*/cover	colors	materials/phantom/black phantom	tube/edging
	chrome			
	shiny chrome 	matt white 	rose gold 	matt white 
	matt chrome 	matt black 	bronze 	matt black 
		matt gold 	phantom 	
			black phantom 	

*no cover for edge version, ceiling edge always in color of the tube

The surfaces rose gold, bronze, phantom and black phantom may differ slightly from other product lines.

further information

- technical data and information on mounting options view pages 178–183

Più spotlights

recessed spotlights



piano in
edge



piano in
cover round



piano in
cover square

360° rotatable,
swivel range 20°

for recessed mounting
with filigree ceiling edge

for recessed mounting
installation with cover
round

for recessed mounting
installation with cover
square

versions



max. 26 W (1640 lm)

chrome/colors

398,32

500,84

500,84

materials

+ 67,23

+ 84,03

phantom/black phantom

+ 100,84

+ 126,05

C 80

80°/lens



max. 26 W (1030 lm)

chrome/colors

415,13

517,65

517,65

materials

+ 67,23

+ 84,03

phantom/black phantom

+ 100,84

+ 126,05

S 100

100°/lens

+ satinised glass



max. 26 W (1140 lm)

chrome/colors

415,13

517,65

517,65

materials

+ 67,23

+ 84,03

phantom/black phantom

+ 100,84

+ 126,05

S 80

80°/lens

+ soft edge glass



max. 26 W (1280 lm)

chrome/colors

431,93

534,45

534,45

materials

+ 67,23

+ 84,03

phantom/black phantom

+ 100,84

+ 126,05

S 40

40°/lens

+ soft edge glass + small lens medium

can also be configured as pro version
excl. power supply at Digital Order System (DOS)

control

features



230V light engine 26 W
(switchable 13/18/26 W)
dimmable via trailing-edge
phase cut dimmer

Occhio air module



Bluetooth dimming module for
mounting in hollow ceiling or switch
box for max. 4 spotlights

82,35

versions



max. 26 W (1400 lm)

chrome/colors

391,60

494,12

494,12

materials

+ 67,23

+ 84,03

phantom/black phantom

+ 100,84

+ 126,05

C 80

80°/cone glass

+ small lens medium



max. 26 W (1210 lm)

chrome/colors

408,40

510,92

510,92

materials

+ 67,23

+ 84,03

phantom/black phantom

+ 100,84

+ 126,05

S 100

100°/lens

+ satinised glass



max. 26 W (1250 lm)

chrome/colors

408,40

510,92

510,92

materials

+ 67,23

+ 84,03

phantom/black phantom

+ 100,84

+ 126,05

S 80

80°/lens

+ soft edge glass



max. 26 W (1220 lm)

chrome/colors

416 ,81

519,33

519,33

materials

+ 67,23

+ 84,03

phantom/black phantom

+ 100,84

+ 126,05

S 40

40°/lens

+ soft edge glass + small lens medium

can also be configured as pro version
excl. power supply at Digital Order System (DOS)

inserts

- filter red
- filter green
- filter blue
- filter yellow
- filter magenta

33,61

(max. 18 W)

options

light source

2700 K or 3000 K, perfect color CRI97
pro version also available in 4000 K, perfect color CRI97

surfaces

head*/cover

chrome

shiny chrome



matt chrome



colors

matt white



matt black



matt gold



materials/phantom/black phantom

rose gold



bronze



phantom



black phantom



tube/edging

matt white



matt black



*no cover for edge version, ceiling edge always in color of the tube
The surfaces rose gold, bronze, phantom and black phantom may differ slightly from other product lines.

further options

- further lighting effects view page 182
- accessories for Occhio air from page 260

These and further options can be configured at
Occhio Digital Order System (DOS)

further information

- technical data and information on mounting options view pages 178–183

Più spotlights

recessed spotlights



piano v
edge

piano v
cover round

piano v
cover square

non-rotatable,
non-swiveling

for recessed mounting
with filigree ceiling edge

for recessed mounting
installation with cover
round

for recessed mounting
installation with cover
square

for recessed mounting
with filigree ceiling edge

for recessed mounting
installation with cover
round

for recessed mounting
installation with cover
square

versions



max. 26 W (1640 lm)

chrome/colors

284,03

366,39

366,39

materials

+ 16,81

phantom/black phantom

+ 25,21

C 80
80°/lens

versions



max. 26 W (1400 lm)

chrome/colors

277,31

359,66

359,66

materials

277,31

phantom/black phantom

277,31

C 80
80°/cone glass
+ small lens medium



max. 26 W (1030 lm)

chrome/colors

300,84

383,19

383,19

materials

+ 16,81

phantom/black phantom

+ 25,21

S 100
100°/lens
+ satinised glass



max. 26 W (1210 lm)

chrome/colors

294,12

376,47

376,47

materials

294,12

phantom/black phantom

294,12

S 100
100°/lens
+ satinised glass



max. 26 W (1140 lm)

chrome/colors

300,84

383,19

383,19

materials

+ 16,81

phantom/black phantom

+ 25,21

S 80
80°/lens
+ soft edge glass



max. 26 W (1250 lm)

chrome/colors

294,12

376,47

376,47

materials

294,12

phantom/black phantom

294,12

S 80
80°/lens
+ soft edge glass



max. 26 W (1280 lm)

chrome/colors

317,65

400,00

400,00

materials

+ 16,81

phantom/black phantom

+ 25,21

S 40
40°/lens
+ soft edge glass + small lens medium



max. 26 W (1220 lm)

chrome/colors

302,52

384,87

384,87

materials

302,52

phantom/black phantom

302,52

S 40
40°/lens
+ soft edge glass + small lens medium

can also be configured as pro version
excl. power supply at Digital Order System (DOS)

can also be configured as pro version
excl. power supply at Digital Order System (DOS)

control	features		Occhio air module 	Bluetooth dimming module for mounting in hollow ceiling or switch box for max. 4 spotlights	82,35	inserts	filter red filter green filter blue filter yellow filter magenta (max. 18 W)	33,61

options	light source	surfaces	head*/cover	colors	materials/phantom/black phantom	tube/edging
	2700 K or 3000 K, perfect color CRI 97 pro version also available in 4000 K, perfect color CRI 97		chrome			
			shiny chrome	matt white	rose gold	matt white
			matt chrome	matt black	bronze	matt black
				matt gold	phantom	
					black phantom	
*head and tube of piano v only available in matt white and matt black The surfaces rose gold, bronze, phantom and black phantom may differ slightly from other product lines.						

further options	- further lighting effects view page 182 - accessories for Occhio air from page 260	These and further options can be configured at Occhio Digital Order System (DOS)	further information	- technical data and information on mounting options view pages 178–183
-----------------	--	---	---------------------	---

Più piano pure

recessed spotlights



piano
pure



piano in
pure



R piano
pure



R piano in
pure

360° rotatable
for recessed mounting installation
seamless mounting incl. mounting board

swivel range 30°

swivel range 30°

swivel range 30°

swivel range 20°

versions



max. 26 W (1810 lm)

chrome/colors

521,01

561,34

materials

+ 67,23

phantom/black phantom

+ 100,84

C 80

80°/lens
+ small lens medium

versions



max. 26 W (1400 lm)

chrome/colors

514,29

554,62

materials

+ 67,23

phantom/black phantom

+ 100,84

C 80

80°/cone glass
+ small lens medium



max. 26 W (1210 lm)

chrome/colors

537,82

578,15

materials

+ 67,23

phantom/black phantom

+ 100,84

S 100

100°/lens
+ satinised glass



max. 26 W (1210 lm)

chrome/colors

531,09

571,43

materials

+ 67,23

phantom/black phantom

+ 100,84

S 100

100°/cone glass
+ soft edge glass + small lens flat



max. 26 W (1250 lm)

chrome/colors

537,82

578,15

materials

+ 67,23

phantom/black phantom

+ 100,84

S 80

80°/lens
+ soft edge glass



max. 26 W (1250 lm)

chrome/colors

531,09

571,43

materials

+ 67,23

phantom/black phantom

+ 100,84

S 80

80°/cone glass
+ soft edge glass + small lens medium



max. 26 W (1220 lm)

chrome/colors

554,62

594,96

materials

+ 67,23

phantom/black phantom

+ 100,84

S 40

40°/lens
+ soft edge glass + small lens medium



max. 26 W (1220 lm)

chrome/colors

539,50

579,83

materials

+ 67,23

phantom/black phantom

+ 100,84

S 40

40°/cone glass
+ Fresnel lens + small lens medium

can also be configured as pro version
excl. power supply at Digital Order System (DOS)

can also be configured as pro version
excl. power supply at Digital Order System (DOS)

control

features



230V light engine 26 W
(switchable 13/18/26 W)
dimmable via trailing-edge
phase cut dimmer

Occhio air module



Bluetooth dimming module for
mounting in hollow ceiling or switch
box for max. 4 spotlights

82,35

inserts

- filter red
- filter green
- filter blue
- filter yellow
- filter magenta

33,61

(max. 18 W)

options

light source

2700 K or 3000 K, perfect color CRI97
pro version also available in 4000 K, perfect color CRI97

surfaces

head

chrome

shiny chrome



matt chrome



colors

matt white



matt black



matt gold



materials/phantom/black phantom

rose gold



bronze



phantom



black phantom



tube/edging

matt white



matt black



The surfaces rose gold, bronze, phantom and black phantom may differ slightly from other product lines.

further options

- further lighting effects view page 182
- accessories for Occhio air from page 260

These and further options can be configured at
Occhio Digital Order System (DOS)

further information







- technical data and information on mounting options view pages 178–183

Più mounting accessories





sideways inlet (single- or double- sided) through-wiring set (for alto) for all surface-mounted versions H 7 mm, ø 76 mm (ø base 88 mm)		matt white	28,57
canopy with outlet on one or both sides for all surface-mounted versions H 15 mm, ø 88 mm		shiny chrome glossy white matt chrome matt white matt black	55,46
cavity box for mounting of flat luminaires in hollow ceilings and -walls			3,36
inserts (color filter max. 18 W)	filter red filter green filter blue filter yellow filter magenta satinised glass soft edge glass Fresnel-lens small lens flat small lens medium small lens high	33,61 16,81 16,81 25,21 23,53	
Occhio air module Bluetooth 4.0 dim module for phase-cut dimmable spotlights and power supply units, mounting in cavity or switch box, max. 4 x 32 W (with Occhio converter, other converters max. 52 W), L 40 mm x W 36 mm x H 14 mm			82,35
Occhio air adapter			
for Più alto adapter ring incl. »air« module, mounting under surface-mounted spacing box, ø 83 mm, H 14 mm		matt white matt black	110,92
for Più alto v adapter ring incl. »air« module, mounting under surface-mounted spacing box, ø 83 mm, H 14 mm		matt white matt black	110,92
for Più alto 3d adapter ring incl. »air« module, mounting under surface-mounted spacing box, ø 88 mm, H 14 mm		matt white matt black	110,92

Can be configured at **Occhio Digital Order System (DOS)**

Più alto mounting options

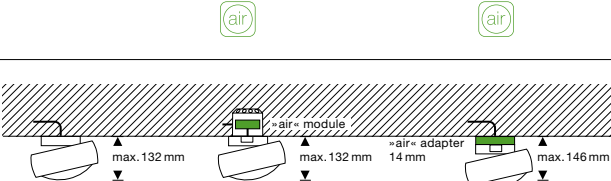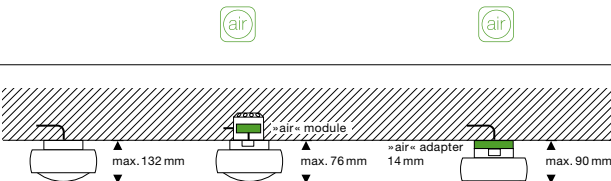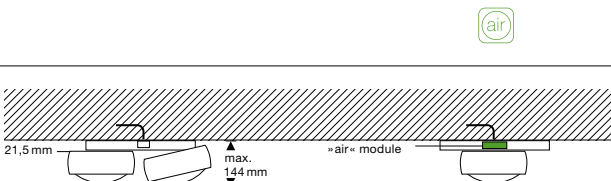alto head H 42 mm, ø 123 mm base H 20 mm, ø 83 mm  52° swivel range 360° rotatable	solid ceiling with 230 V mains connection 
alto v head H 42 mm, ø 123 mm base H 20 mm, ø 83 mm  non swiveling	solid ceiling with 230 V mains connection 
alto doppio head H 42 mm, ø 123 mm base L 225 mm x W 45 mm x H 21,5 mm  52° swivel range 360° rotatable	solid ceiling with 230 V mains connection, through-wiring possible 
alto track head H 42 mm, ø 123 mm with in-trac adapter  52° swivel range 360° rotatable	in-trac adapter for Onetrack by Eutrac or Stucchi 

Più alto 3d mounting options

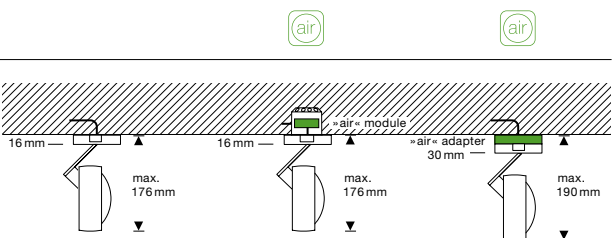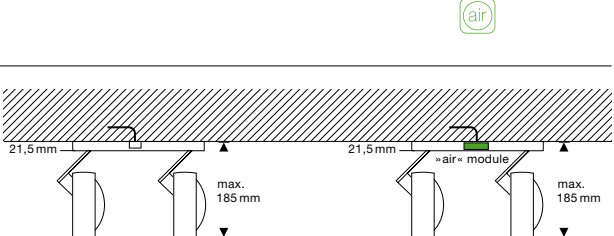alto 3d VOLT head H 42 mm, ø 123 mm base H 16 mm, ø 88 mm  90° swivel range 360° rotatable	solid ceiling with 230 V mains connection, through-wiring possible 
alto 3d doppio VOLT head H 42 mm, ø 123 mm base L 225 mm x W 45 mm x H 21,5 mm  90° swivel range 360° rotatable	solid ceiling with 230 V mains connection, through-wiring possible 
alto 3d track VOLT head H 42 mm, ø 123 mm with in-trac adapter  90° swivel range 360° rotatable	in-trac adapter for Onetrack by Eutrac or Stucchi 


Più piano mounting options

piano edge
head H38 mm, ø125 mm




optional with Occhio air


edge mounting tube

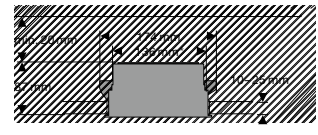

hollow ceiling

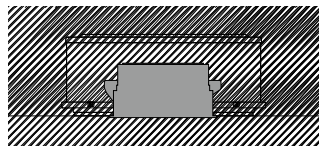


concrete ceiling
(Kaiser HaloX 250 with mineral-fibre board)



ceiling edge


piano cover
head H38 mm, ø125 mm




20° swivel range
360° rotatable

optional with Occhio air


mounting tube with cover

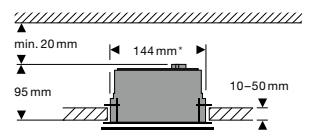

hollow ceiling

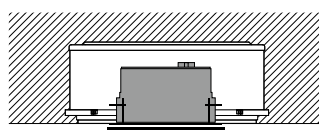


concrete ceiling
(Kaiser HaloX 250 with mineral-fibre board)



cover

piano pure
head H38 mm, ø125 mm


as pro version (=constant current=)
excl. remote power supply available



30° swivel range
360° rotatable


optional with Occhio air

mounting board for seamless mounting

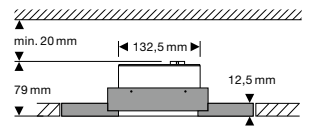


hollow ceiling
(fibre cement board with holding ring)


flush-mount ring for seamless mounting

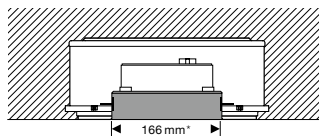

concrete ceiling plastered, no fair-faced concrete
(Kaiser HaloX 250 with mineral-fibre board)



holding ring for panel for seamless mounting

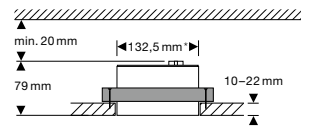

hollow ceiling
(mounting from back)

* cut-out dimension


Più piano in mounting options

piano in edge
head H38 mm, ø125 mm




optional with Occhio air


edge mounting tube

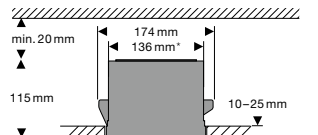

hollow ceiling

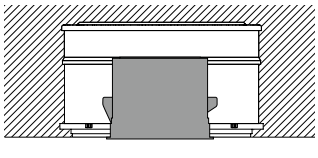


concrete ceiling
(Kaiser HaloX 250 with 50 mm intermediate frame and mineral-fibre board)



ceiling edge


piano in cover
head H38 mm, ø125 mm




30° swivel range
360° rotatable

optional with Occhio air


mounting tube in with cover

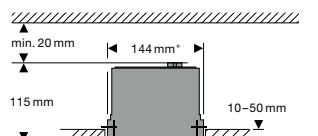

hollow ceiling

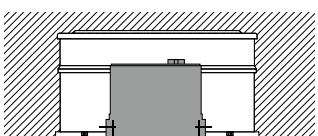


concrete ceiling
(Kaiser HaloX 250 with 50 mm intermediate frame and mineral-fibre board)



cover

piano in pure
head H38 mm, ø125 mm


as pro version (=constant current=)
excl. remote power supply available



20° swivel range
360° rotatable


optional with Occhio air

mounting board for seamless mounting

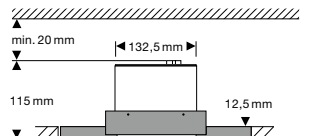


hollow ceiling
(fibre cement board with holding ring)


flush-mount ring for seamless mounting

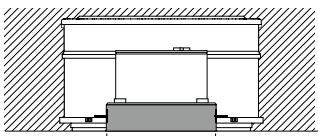

concrete ceiling plastered, no fair-faced concrete
(Kaiser HaloX 250 with 50 mm intermediate frame and mineral-fibre board)



holding ring for panel for seamless mounting

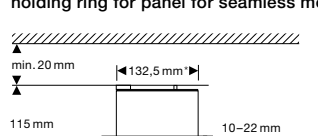

hollow ceiling
(mounting from back)

Più piano v mounting options

piano v edge
head H38 mm, ø125 mm




non swiveling




optional with Occhio air

edge mounting tube

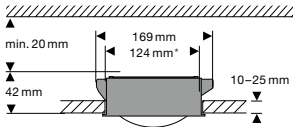

hollow ceiling

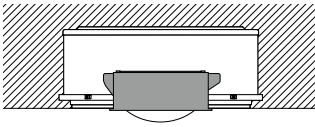


concrete ceiling
(Kaiser HaloX 250 with mineral-fibre board)



ceiling edge

piano v cover
head H38 mm, ø125 mm




non swiveling




optional with Occhio air


mounting tube with cover

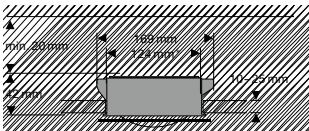

hollow ceiling

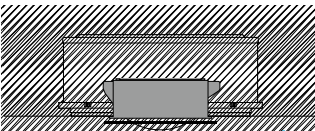

concrete ceiling
(Kaiser HaloX 250 with mineral-fibre board)



cover

* cut-out dimension

Più lighting effects (can be configured)

head		lens	R-version
diffus	 B		diffus/cone glass + satinised glass + small lens flat
contour	 C100		100°/cone glass + small lens flat
	 C80	80°/lens	80°/cone glass + small lens medium
soft	 S100	100°/lens + satinised glass	100°/cone glass + soft edge glass + small lens flat
	 S80	80°/lens + soft edge glass	80°/cone glass + soft edge glass + small lens medium
	 S60	60°/lens + soft edge glass + small lens flat	60°/cone glass + soft edge glass + small lens high
	 S40	40°/lens + soft edge glass + small lens medium	40°/cone glass + Fresnel-lens + small lens medium
	 S30	30°/lens + Fresnel-lens + small lens medium	30°/cone glass + Fresnel-lens + small lens high

Più luminaires with these lighting effects are configurable at **Occhio Digital Order System (DOS)**

Più technical data and control


 Occhio VOLT light engine		connection	U	230V AC/50 Hz
		average service life	t	> 40.000 h
		energy-efficiency class	EEK	G
		LED		
		color temperature	T	perfect color 2700 K, 3000 K
		Color Rendering Index	CRI	Ra 97
		recommended use		residential and public
		power	P	perfect color
		luminous flux luminaire	φ	26 W18 W13 W
Più	C 80			1290 lm
	S 100			1030 lm
	S 80			1140 lm
	S 60			1240 lm
	S 40			1280 lm
	S 30			1270 lm
Più R	B			1200 lm
	C 100			1340 lm
	C 80			1400 lm
	S 100			1210 lm
	S 80			1250 lm
	S 60			1220 lm
	S 40			1220 lm
	S 30			1250 lm
control		Più VOLT luminaires dimmable via trailing-edge phase cut dimmer*.		
 Occhio air powered by Casambi		 Occhio air control via Bluetooth – switching, dimming of individual luminaires, groups and scenes.		

*compatible dimmers: [occhio.com/dim](https://www.occhio.com/dim)

M series

io

The io luminaire series is synonymous with joy: joy in the playful use of light. Joy in the individual design options of the luminaire and the lighting effects. Joy in the perfect synthesis of form and function.

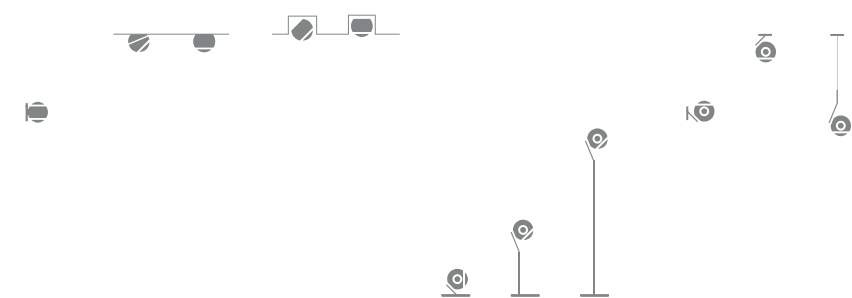

io spotlights

wall luminaires



verticale

for surface mounting through-wiring possible		360° rotatable	
version			
	18 W (1020 lm) 13 W (750 lm)	chrome/colors shiny chrome	480,67
	13 W (750 lm)	materials	+ 67,23
	13 W (750 lm)	phantom/black phantom	+ 100,84
D lens/lens 80°/80° incl. soft edge glass			
control			
	features 230 V light engine dimable via trailing-edge phase cut dimmer	Occhio air module  Bluetooth dimmer module, mounting in hollow ceiling or switch box, for max. 4 spotlights 82,35	Occhio air adapter  adapter ring incl. »air« module, mounting under luminaire 110,92
	inserts		
		 satinised glass, light cone with soft contour approx. 100°	13,45
		 Fresnel lens, light cone with soft contour approx. 60°	28,57
options			
	light source 2700 K or 3000 K, perfect color CRI97	surfaces	
		head/base chrome shiny chrome 	colors matt white  matt black  matt gold/matt white  matt gold/matt black 
		materials/phantom/black phantom rose gold/matt black  bronze/matt black  phantom/matt black  black phantom/matt black 	
The surfaces rose gold, bronze, phantom and black phantom may differ slightly from other product lines.			
further options		further information	
- further mounting accessories view page 194 - accessories for Occhio air from page 260		- technical data and information on mounting options view pages 195–198	
These and further options can be configured at Occhio Digital Order System (DOS)			

io spotlights

ceiling spotlights



giro

giro doppio

alto v

for surface mounting
through-wiring possible

360° rotatable
swivel range 45°

360° rotatable
swivel range 45°

non-swiveling

version*



13 W (650 lm)

chrome/colors

386,55

815,13

302,52

materials

+ 67,23

+ 134,45

+ 67,23

phantom/black phantom

+ 100,84

+ 201,68

+ 100,84

C
lens 80°
incl. soft edge glass

* doppio versions: 2 x 13 W (2 x 490 lm)

control

features



230 V light engine
dimnable via trailing-edge phase cut dimmer

Occhio air module



Bluetooth dimmer module,
mounting in hollow ceiling or
switch box, for max. 4 spotlights
82,35

Occhio air adapter (incl. »air« module)

io giro/alto v
110,92



io giro doppio
110,92



inserts

— satinised glass, light cone
with soft contour approx. 100°

13,45

— Fresnel lens, light cone
with soft contour approx. 60°

28,57

options

light source

2700 K or 3000 K, perfect color CRI97

surfaces

head/base*

chrome

shiny chrome/matt white



colors

matt white
matt black
matt gold/matt white
matt gold/matt black



materials/phantom/black phantom

rose gold/matt black
bronze/matt black
phantom/matt black
black phantom/matt black



* only for doppio
The surfaces rose gold, bronze, phantom and black phantom may differ slightly from other product lines.

further options

- further mounting accessories view page 194
- accessories for Occhio air from page 260

These and further options can be configured at
Occhio Digital Order System (DOS)

further information

- technical data and information on mounting options view pages 195–198

io spotlights

recessed spotlights



		piano edge	piano cover round	piano cover square			piano v edge	piano v cover round	piano v cover square
360° rotatable, swivel range 45° incl. driver (trailing-edge phase cut dimmable)		for recessed mounting with filigree ceiling edge	for recessed mounting installation with cover round	for recessed mounting installation with cover square	non-swiveling incl. driver (trailing-edge phase cut dimmable)		non-rotatable, for recessed mounting with filigree ceiling edge	for recessed mounting installation with cover round	for recessed mounting installation with cover square
version									
	13 W (1010 lm)	chrome/colors	304,20	384,87	384,87		231,93	267,23	267,23
		materials	+ 67,23	+ 84,03			+ 67,23	+ 84,03	
		phantom/black phantom	+ 100,84	+ 126,05			+ 100,84	+ 126,05	
C lens 80° incl. soft edge glass									
can also be configured as pro version excl. power supply at Digital Order System (DOS)					can also be configured as pro version excl. power supply at Digital Order System (DOS)				
control	features	Occhio air module 				inserts (optional)			
	»cc« version (constant current) incl. remote power supply	Bluetooth dimmer module, mounting in hollow ceiling or switch box, for max. 4 spotlights				 satinised glass, light cone with soft contour approx. 100°	13,45		
		82,35				 Fresnel lens, light cone with soft contour approx. 60°	28,57		
options	light source 2700 K or 3000 K, perfect color CRI 97 pro version also available in 4000 K, perfect color CRI 97				surfaces	head/cover* chrome shiny chrome 	colors matt white  matt black  matt gold 	materials/phantom/black phantom rose gold  bronze  phantom  black phantom 	tube/ceiling edge (edge) matt white  matt black 
					*head and tube for edge version only available in matt white and matt black The surfaces rose gold, bronze, phantom and black phantom may differ slightly from other product lines.				
further options	- accessories for Occhio air from page 260			These and further options can be configured at Occhio Digital Order System (DOS)		further information	- technical data and information on mounting options view pages 195–198		

io spotlights

recessed spotlights



piano pure

piano v pure

for recessed mounting
seamless mounting incl. mounting board
incl. driver (trailing-edge phase cut dimmable)

360° rotatable, swivel range 45°

non-rotatable, non-swiveling

version



13W (1010lm)

chrome/colors

426,89

materials

+67,23

phantom/black phantom

+100,84

309,24

+67,23

+100,84

C

lens 80°
incl. soft edge glass

can also be configured as pro version
excl. power supply at Digital Order System (DOS)

can also be configured as pro version
excl. power supply at Digital Order System (DOS)

control

features

»cc« version (constant current)
incl. remote power supply

Occhio air module



Bluetooth dimmer module,
mounting in hollow ceiling or
switch box, for max. 4 spotlights
82,35

inserts

(optional)

- satinised glass, light cone
with soft contour approx. 100°

13,45
- Fresnel lens, light cone
with soft contour approx. 60°

28,57

options

light source

2700 K or 3000 K, perfect color CRI97
pro version also available in 4000 K, perfect color CRI97

surfaces

head/cover*

chrome

shiny chrome



colors

matt white
matt black
matt gold



materials/phantom/black phantom

rose gold
bronze
phantom
black phantom



tube

matt white
matt black



The surfaces rose gold, bronze, phantom and black phantom may differ slightly from other product lines.

further options

- accessories for Occhio air from page 260

These and further options can be configured at
Occhio Digital Order System (DOS)

further information





- technical data and information on mounting options view pages 195–198

io spotlights mounting accessories

sideways inlet (single- or double-sided) through-wiring set for io spotlights for all surface-mounted versions H 7 mm, ø 76 mm		matt white	28,57
canopy with outlet on one or both sides for all surface-mounted versions, H 15 mm, ø 88 mm		shiny chrome glossy white matt chrome matt white matt black	55,46
cavity box for mounting of flat luminaires in hollow ceilings and -walls			3,36
mirror assembly kit for mounting the luminaires io verticale directly on a mirror, (drilling diameter 70 mm) no possibility of revision of the power supply via mirrors for flat versions			43,70
Occhio air module Bluetooth 4.0 dim module for phase-cut dimmable luminaires and power supply units, mounting in cavity or switch box, max. 4 x 32 W (with Occhio converter, other converters max. 52 W), L 40 mm x W 36 mm x H 14 mm			82,35
Occhio air adapter for io verticale adapter ring incl. »air« module, mounting under luminaire, ø 82 mm, H 14 mm		matt white matt black	110,92
for io giro/io alto v adapter ring incl. »air« module, mounting under luminaire, ø 77 mm, H 10 mm		matt white matt black	110,92
for io giro doppio adapter ring incl. »air« module, mounting under luminaire, L 196 mm x W 51 mm x H 7 mm		matt white matt black	110,92
inserts	satinised glass Fresnel lens		13,45 28,57

Can be configured at **Occhio Digital Order System (DOS)**

io spotlights mounting options

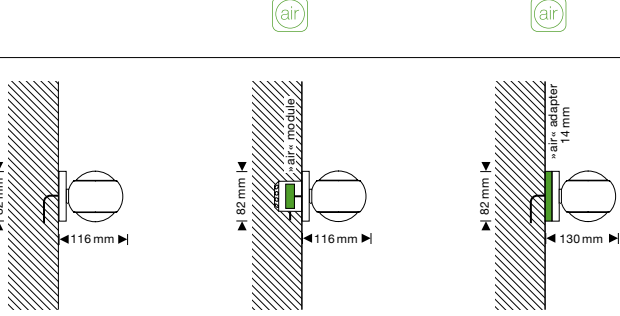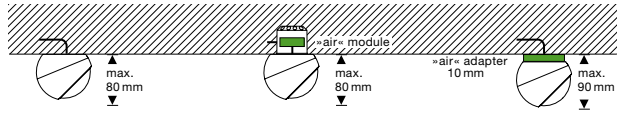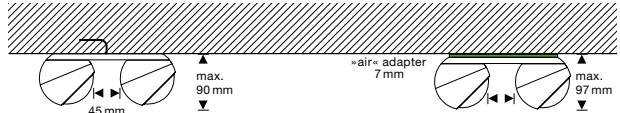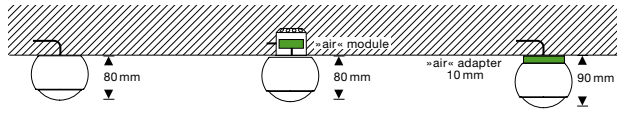verticale head ø 100 mm, L 116 mm  360° rotatable	solid wall with 230 V power supply, through-wiring possible 
giro head ø 100 mm, H 80 mm  45° swivel angle 360° rotatable	solid wall with 230 V power supply, through-wiring possible 
giro doppio head ø 100 mm, H 80 mm base L 222 mm x W 76 mm x H 11 mm  45° swivel angle 360° rotatable	solid wall with 230 V power supply, through-wiring possible 
alto v head ø 100 mm, H 80 mm  non swiveling	solid wall with 230 V power supply 

io spotlights piano mounting options


piano edge

head H 50 mm, ø 100 mm




optional with Occhio air

edge mounting tube

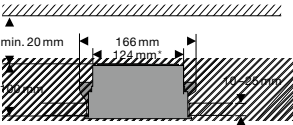

hollow ceiling

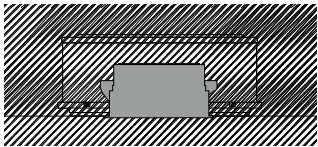

concrete ceiling
(Kaiser HaloX 250 with mineral-fibre board)
power supply max. L 210 mm x H 30 mm



ceiling edge


piano v edge

head H 50 mm, ø 100 mm




optional with Occhio air

edge mounting tube

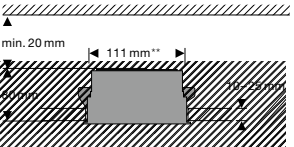

hollow ceiling

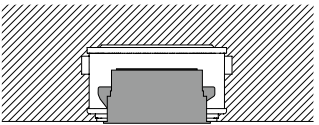

concrete ceiling
(Kaiser HaloX 180 with mineral-fibre board)
power supply max. L 130 mm x H 30 mm



ceiling edge


piano cover

head H 50 mm, ø 100 mm




optional with Occhio air

mounting tube with cover

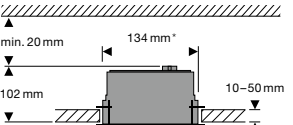

hollow ceiling

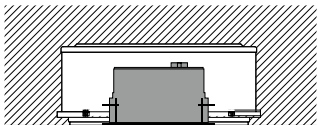

concrete ceiling
(Kaiser HaloX 250 with mineral-fibre board)
power supply max. L 210 mm x H 30 mm



cover


piano v cover

head H 50 mm, ø 100 mm




optional with Occhio air

mounting tube with cover

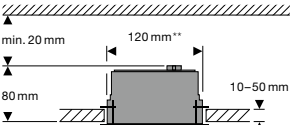

hollow ceiling

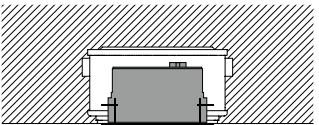

concrete ceiling
(Kaiser HaloX 180 with mineral-fibre board)
power supply max. L 130 mm x H 30 mm



cover

piano pure


head H 50 mm, ø 100 mm

as pro version excl.
remote power supply available




optional with Occhio air

mounting board for seamless mounting

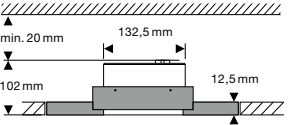


hollow ceiling
(fibre cement board with holding ring)

flush-mount ring for seamless mounting

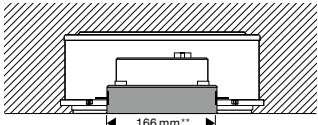

concrete ceiling plastered, no fair-faced concrete
(Kaiser HaloX 250 with mineral-fibre board)
power supply max. L 210 mm x H 30 mm



piano pure


head H 50 mm, ø 100 mm

as pro version excl.
remote power supply available




optional with Occhio air

mounting board for seamless mounting

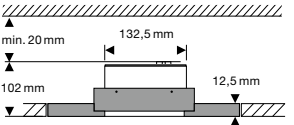


hollow ceiling
(fibre cement board with holding ring)


flush-mount ring for seamless mounting

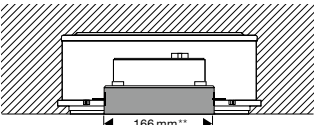

concrete ceiling plastered, no fair-faced concrete
(Kaiser HaloX 250 with mineral-fibre board)
power supply max. L 210 mm x H 30 mm



*compatible dimmers: occhio.com/dim
**cut-out dimension



connection	U	230 V AC/50 Hz
average service life	t	> 40.000 h
energy-efficiency class	EEK	G

LED		
color temperature	T	2700 K, 3000 K
Color Rendering Index	CRI	Ra 97
recommended use		residential and public

power	P	perfect color	
luminous flux luminaire	φ	13 W	18 W

giro/alto v			
C		650 lm	
verticale			
D		570 lm	1020 lm

control

Occhio air
powered by
Casambi


io spotlights VOLT luminaires dimmable via trailing-edge phase cut dimmer*.
List of compatible dimmer see below occhio.com/dim.

**Occhio air**
control via Bluetooth – switching, dimming of individual luminaires, groups and scenes.

* compatible dimmers: occhio.com/dim

io 3d

table and floor luminaires

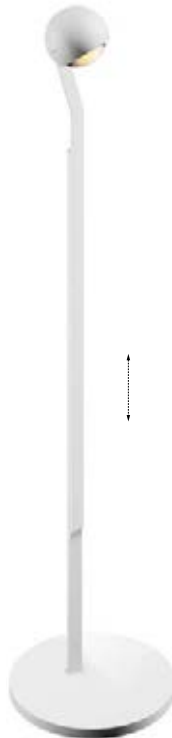							
		basso		tavolo		lettura	
		14 cm		40 cm		120–150 cm height adjustable	
head and body 360° rotatable pads exchangeable incl. plug-in power supply							
version							
 18 W (800 lm)		chrome/colors		610,08		1.161,34	
		materials		+ 67,23		+ 67,23	
		phantom/black phantom		+ 100,84		+ 100,84	
C							
lens							
80°							
control		features			inserts		
		switchable and dimmable via »touchless control« power 13/18 W switchable			filter red filter green filter blue filter yellow filter magenta (max. 13 W) satinised glass, light cone with soft contour approx. 100° soft edge glass, light cone with soft contour approx. 80° Fresnel lens, light cone with soft contour approx. 60° 23,53 13,45 16,81 28,57		
options		light source			surfaces		
		2700 K or 3000 K, perfect color CRI 97			head/pads/body/base chrome shiny chrome chrome matt glossy white/shiny chrome/glossy white  colors matt white matt black matt gold/matt white matt gold/matt black  materials/phantom/black phantom rose gold/matt black bronze/matt black phantom/matt black black phantom/matt black 		
The surfaces rose gold, bronze, phantom and black phantom may differ slightly from other product lines.							

io 3d

wall and ceiling luminaires



pico

sospeso

head and body 360° rotatable pads and inserts exchangeable		up/flat		flat versions can be synced		fix, up/flat cable length adjustable during mounting, 80–180 cm		variable, up/flat continuous height adjustment 50–200 cm	
version									
	max. 18 W (1170 lm)	chrome/colors	583,19			695,80		964,71	
		materials	+ 67,23			+ 67,23			
		phantom/black phantom	+ 100,84			+ 100,84			
C lens 80°						special lengths up to 1000 cm possible (surcharge +142,86, non discountable) longer version, fix (180–280 cm) configurable (with surcharge)			
control									
features		Occhio air module 		Occhio air adapter 		inserts			
switchable and dimmable via »touchless control« (can be deactivated), alternatively dimmable via trailing-edge phase cut dimmer power 13/18 W switchable		Bluetooth dimmer module, mounting in hollow ceiling or switch box, for max. 4 spotlights		adapter ring incl. »air« module, mounting under surface-mounted spacing box		filter red filter green filter blue filter yellow filter magenta (max. 13 W)		23,53	
						satinised glass, light cone with soft contour approx. 100° soft edge glass, light cone with soft contour approx. 80° Fresnel lens, light cone with soft contour approx. 60°		13,45	
		82,35		110,92				16,81	
								28,57	
options									
light source		mounting options		surfaces		head/pads/body/base		materials/phantom/black phantom	
2700 K or 3000 K, perfect color CRI 97		up  with integrated converter for surface mounting, through-wiring possible		flat  with flat base for hollow ceiling with hollow ceiling box (incl. remote converter)		chrome shiny chrome chrome matt glossy white/shiny chrome/glossy white		colors matt white matt black matt gold/matt white matt gold/matt black	
									
								rose gold/matt black bronze/matt black phantom/matt black black phantom/matt black	
									

io 3d mounting accessories


sideways inlet (single- or double-sided) for all surface-mounted versions, H 7 mm, ø 76 mm (ø base 88 mm)		matt white	28,57
canopy with outlet on one or both sides for all surface-mounted versions, H 15 mm, ø 88 mm		shiny chrome glossy white matt chrome matt white matt black	55,46
cable redirection for sospeso H 18 mm, ø 15 mm		shiny chrome matt chrome matt white matt black	35,29
mirror assembly kit for mounting the luminaires io pico directly on a mirror, (drilling diameter 70 mm) no possibility of revision of the power supply via mirrors			43,70
cavity box for mounting of flat luminaires in hollow ceilings and -walls			3,36
Occhio air module Bluetooth 4.0 dim module for phase-cut dimmable luminaires and power supply units, mounting in cavity or switch box, max. 4 x 32 W (with Occhio converter, other converters max. 52 W), L 40 mm x W 36 mm x H 14 mm			82,35
Occhio air adapter adapter ring incl. »air« module, mounting under luminaire, ø 88 mm, H 14 mm		matt white matt black	110,92
inserts	satinised glass soft edge glass Fresnel lens filter red filter green filter blue filter yellow filter magenta		13,45 16,81 28,57 23,53

Can be configured at **Occhio Digital Order System (DOS)**


io 3d mounting options

head Ø 100 mm


up
with integrated power supply for surface mounting,
through-wiring possible

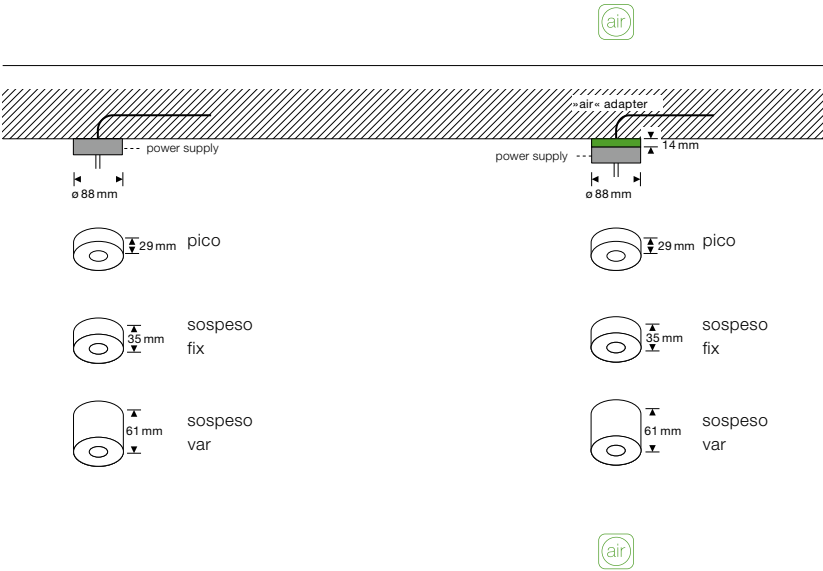

flat
with flat base for cavity box,
remote power supply

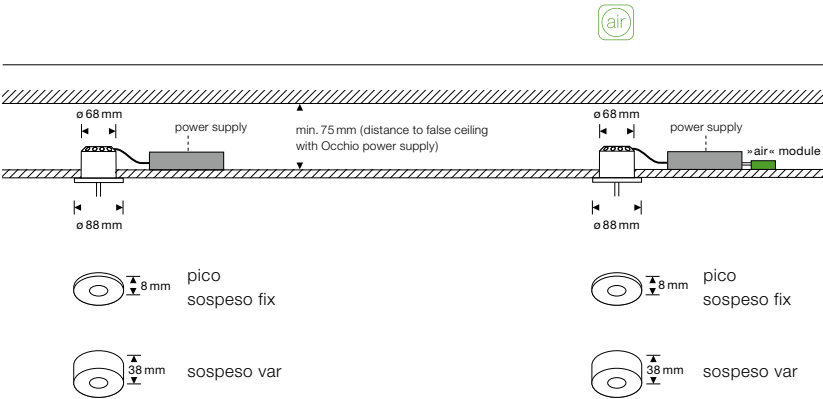

io 3d technical data and control


version »touchless control«	connection				U	48V DC (min. 22 W)
	average service life				t	> 50.000 h
	energy-efficiency class				EEK	G
	LED					perfect color
	color temperature				T	2700 K, 3000 K
	Color Rendering Index				CRI	Ra 97
	recommended use					residential and public
	power				P	perfect color
	luminous flux luminaire				φ	13 W 18 W
	C					800 lm 1170 lm
control	with Occhio power supply					
	The Occhio power supply is perfectly matched to these requirements and can be dimmed by trailing-edge phase cut dimmer*. Can not be used in conjunction with »touchless control« or Occhio air.					
Occhio air powered by Casambi						
	 Occhio air					
	control via Bluetooth – switching, dimming of individual luminaires, groups and scenes.					
touchless dim funktion io luminaire heads	18 W/13 W					
	luminaires are dimmed using remote trailing-edge phase cut dimmers* (except for floor and table luminaires) or controlled with Occhio air (optional), (switching, dimming).					
	18 W SENSOR/13 W SENSOR					
	luminaires can be controlled by the »touchless control« with simple gestures integrated in the head (switching, dimming) – cannot be combined with Occhio air.					

* compatible dimmers: occhio.com/dim

M series

lui

The lui spotlight system is lighting technology in its most beautiful form: interchangeable optics like in the field of photography open new lighting possibilities – with top quality of light and maximum efficiency.

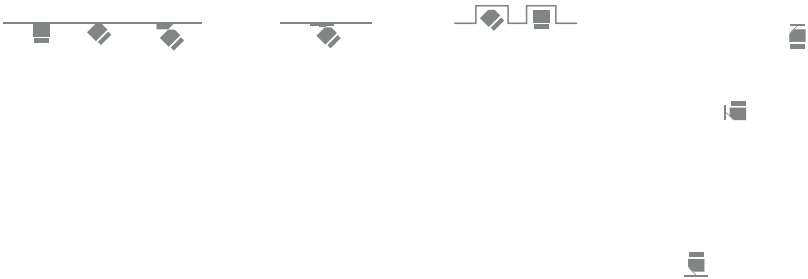

lui spotlights

ceiling spotlights

																	
zoom	continuously adjustable light cone					lens	fixed light cone										
through-wiring possible						through-wiring possible											
360° rotatable swivel range 90° for surface mounting						360° rotatable swivel range 90° for surface mounting											
360° rotatable swivel range 45° mounting on ceiling box						360° rotatable swivel range 45° mounting on ceiling box											
non-swiveling for surface mounting						non-swiveling for surface mounting											
360° rotatable swivel range 45° for surface mounting						360° rotatable swivel range 45° for surface mounting											
version*						version*											
	18 W (420 lm) 13 W (310 lm)	colors shiny chrome	561,34	448,74	351,26	944,54		18 W (540 lm) 13 W (400 lm)	colors shiny chrome	542,86	430,25	332,77	907,56				
	18 W (420 lm)	materials	+ 16,81			+ 33,61		18 W (540 lm)	materials	+ 16,81			+ 33,61				
	18 W (420 lm)	phantom/black phantom	+ 25,21			+ 50,42		18 W (540 lm)	phantom/black phantom	+ 25,21			+ 50,42				
zoom 20°–60°/soft edge glass + zoom optic						C 80 80°/clear glass + small lens medium + lens optic											
																	
						18 W (540 lm) 13 W (400 lm)											
						18 W (540 lm)											
						18 W (540 lm)											
						S 80 80°/soft edge glass + small lens medium + lens optic											
																	
						18 W (450 lm) 13 W (340 lm)											
						18 W (450 lm)											
						18 W (450 lm)											
						S 40 40°/Fresnel lens + small lens medium + lens optic											
* doppio versions: 2 x 18 W/13 W												* doppio versions: 2 x 18 W/13 W					
control	features				Occhio air module 		Occhio air adapter 		inserts								
	230 V light engine				Bluetooth dimming module, for mounting in hollow ceiling or switch box (can be put in doppio base), for max. 4 spotlights		adapter ring incl. »air« module (only volto + alto v), mounting under luminaire										
	dimmable via trailing-edge phase cut dimmer, max. light output, adjustable via rotary knob on the rear side of the head				82,35		110,92		30,25 (for zoom-optics)								
options	light source						surfaces		head/optics/base		colors		materials/phantom/black phantom				
2700 K or 3000 K, perfect color CRI 97								chrome		shiny chrome** 							
								matt white		matt black		matt black/rose gold/matt black		matt black/bronze/matt black			
								matt white/matt gold/matt white		matt black/phantom/matt black		matt black/black phantom/matt black					
								matt black/matt gold/matt black									

lui spotlights

track spotlights



zoom continuously adjustable light cone

alto track

swivel range 55°
360° rotatable
in-trac adapter, for Onetrack by Eutrac or Stucchi

version

	18 W (420 lm) 13 W (310 lm)	colors shiny chrome	443,70
	18 W (420 lm)	materials	+ 16,81
	18 W (420 lm)	phantom/black phantom	+ 25,21

zoom
20°–60°/soft edge glass
+ zoom optic



lens fixed light cone

alto track

swivel range 55°
360° rotatable
in-trac adapter, for Onetrack by Eutrac or Stucchi

version

	18 W (540 lm) 13 W (400 lm)	colors shiny chrome	425,21
	18 W (540 lm)	materials	+ 16,81
	18 W (540 lm)	phantom/black phantom	+ 25,21

C 80
80°/clear glass + small lens medium
+ lens optic

	18 W (540 lm) 13 W (400 lm)	colors shiny chrome	425,21
	18 W (540 lm)	materials	+ 16,81
	18 W (540 lm)	phantom/black phantom	+ 25,21

S 80
80°/soft edge glass + small lens medium
+ lens optic

	18 W (450 lm) 13 W (340 lm)	colors shiny chrome	425,21
	18 W (450 lm)	materials	+ 16,81
	18 W (450 lm)	phantom/black phantom	+ 25,21

S 40
40°/Fresnel lens small + lens medium
+ lens optic

control

features

 **230 V light engine**
dimnable via trailing-edge phase cut dimmer, max. light output, adjustable via rotary knob on the rear side of the head

inserts

	filter red	30,25
	filter green	
	filter blue	
	filter yellow	
	filter magenta	
(for zoom-optics)		

options

light source

2700 K or 3000 K, perfect color CRI97

surfaces

head/optics/adapter
chrome

shiny chrome/matt white
shiny chrome/matt chrome



colors

matt white
matt black
matt white/matt gold/matt white
matt black/matt gold/matt black



head/optics/base
materials/phantom/black phantom

matt black/rose gold/matt black
matt black/bronze/matt black
matt black/phantom/matt black
matt black/black phantom/matt black



The surfaces rose gold, bronze, phantom and black phantom may differ slightly from other product lines.

further options

- further lighting effects view page 224
- further accessories for Occhio air from page 260

These and further options can be configured at
Occhio Digital Order System (DOS)

further information

- technical data and information on mounting options view pages 221–225

lui spotlights

recessed spotlights

							
zoom				lens			
continuously adjustable light cone				fixed light cone			
360° rotation, swivel range 45° incl. driver (trailing-edge phase cut dimmable)				360° rotation, swivel range 45° incl. driver (trailing-edge phase cut dimmable)			
piano edge				piano edge			
for recessed mounting with filigree ceiling edge				for recessed mounting with filigree ceiling edge			
piano cover round				piano cover round			
for recessed mounting with cover round				for recessed mounting with cover round			
piano cover square				piano cover square			
for recessed mounting with cover square				for recessed mounting with cover square			
version				version			
							
18 W (890 lm)				18 W (1010 lm)			
chrome/colors				chrome/colors			
299,16				280,67			
materials				materials			
+ 16,81				+ 16,81			
phantom/black phantom				phantom/black phantom			
+ 25,21				+ 25,21			
379,83				361,34			
379,83				+ 33,61			
zoom				C 80			
20°–60°/soft edge glass + zoom optic				80°/clear glass + small lens medium + lens optic			

lui spotlights

recessed spotlights

							
zoomcontinuously adjustable light cone				lensfixed light cone			
non-swiveling incl. driver (trailing-edge phase cut dimmable)				non-swiveling incl. driver (trailing-edge phase cut dimmable)			
non-rotatable for recessed mounting with filigree ceiling edge				non-rotatable for recessed mounting with filigree ceiling edge			
for recessed mounting with cover round				for recessed mounting with cover round			
for recessed mounting with cover square				for recessed mounting with cover square			
version				version			
 18 W (890 lm) chrome/colors226,89 materials+ 16,81 phantom/black phantom+ 25,21				 18 W (1010 lm) chrome/colors208,40 materials+ 16,81 phantom/black phantom+ 25,21			
zoom 20°–60°/soft edge glass + zoom optic				C 80 80°/clear glass + small lens medium + lens optic			
				 18 W (1010 lm) chrome/colors208,40 materials+ 16,81 phantom/black phantom+ 25,21			
				S 80 80°/soft edge glass + small lens medium + lens optic			
				 18 W (910 lm) chrome/colors208,40 materials+ 16,81 phantom/black phantom+ 25,21			
				S 40 40°/Fresnel lens + small lens medium + lens optic			
can also be configured as pro version excl. power supply at Digital Order System (DOS)				can also be configured as pro version excl. power supply at Digital Order System (DOS)			
control				inserts			
features				 filter red30,25  filter green  filter blue  filter yellow  filter magenta (for zoom-optics)			
»cc« version (constant current) incl. remote power supply							
Occhio air module  Bluetooth dimming module, for mounting in hollow ceiling or switch box for max. 4 spotlights							
82,35							
options				surfaces			
light source				optics/cover* chrome			
2700 K or 3000 K, perfect color CRI97 pro version also available in 4000 K, perfect color CRI97				shiny chrome  matt chrome 			
				colors matt white  matt black  matt gold 			
				materials/phantom/black phantom rose gold  bronze  phantom  black phantom 			
				tube*/ceiling edge matt white  matt black 			
				*tube only available in matt white and matt black The surfaces rose gold, bronze, phantom and black phantom may differ slightly from other product lines.			
further options				further information			
- further lighting effects view page 224 - further accessories for Occhio air from page 260				- technical data and information on mounting options view pages 221–225			
These and further options can be configured at Occhio Digital Order System (DOS)							

lui spotlights

recessed spotlights



zoom continuously adjustable light cone

piano pure

piano v pure

lens fixed light cone

piano pure

piano v pure

for recessed mounting
seamless mounting incl. mounting board
incl. driver (trailing-edge phase cut dimmable)

360° rotatable
swivel range 45°

non-swiveling

for recessed mounting
seamless mounting incl. mounting board
incl. driver (trailing-edge phase cut dimmable)

360° rotatable
swivel range 45°

non-swiveling

version



18 W (890 lm)	chrome/colors	421,85
	materials	+ 16,81
	phantom/black phantom	+ 25,21

304,20

zoom
20°–60°/soft edge glass
+ zoom optic

version



18 W (1010 lm)	chrome/colors	403,36
	materials	+ 16,81
	phantom/black phantom	+ 25,21

285,71

C 80
80°/clear glass + small lens medium
+ lens optic



18 W (1010 lm)	chrome/colors	403,36
	materials	+ 16,81
	phantom/black phantom	+ 25,21

285,71

S 80
80°/soft edge glass + small lens medium
+ lens optic



18 W (910 lm)	chrome/colors	403,36
	materials	+ 16,81
	phantom/black phantom	+ 25,21

285,71

S 40
40°/Fresnel lens + small lens medium
+ lens optic

can also be configured as pro version
excl. power supply at Digital Order System (DOS)

can also be configured as pro version
excl. power supply at Digital Order System (DOS)

control

features

»cc« version (constant current)
incl. remote power supply

Occhio air module



Bluetooth dimming module,
for mounting in hollow ceiling or
switch box for max. 4 spotlights

82,35

inserts

	filter red
	filter green
	filter blue
	filter yellow
	filter magenta

30,25

(for zoom-optics)

options

light source

2700 K or 3000 K, perfect color CRI97
pro version also available in 4000 K, perfect color CRI97

surfaces

optics

chrome

shiny chrome	
matt chrome	

colors

matt white	
matt black	
matt gold	

materials/phantom/black phantom

rose gold	
bronze	
phantom	
black phantom	

tube*

matt white	
matt black	

*for tube further surfaces can be configured.
The surfaces rose gold, bronze, phantom and black phantom may differ slightly from other product lines.

further options

- further lighting effects view page 224
- further accessories for Occhio air from page 260

These and further options can be configured at
Occhio Digital Order System (DOS)

further information








- technical data and information on mounting options view pages 221–225

lui spotlights mounting accessories

sideways inlet (single- or double-sided) for all surface-mounted versions, H 7 mm, ø 76 mm (ø base 88 mm)		matt white	28,57
canopy with outlet on one or both sides for all surface-mounted versions, H 15 mm, ø 88 mm		shiny chrome glossy white matt chrome matt white matt black	55,46
mirror assembly kit for mounting the luminaires io pico directly on a mirror, (drilling diameter 70 mm) no possibility of revision of the power supply via mirrors			43,70
cavity box for mounting of flat luminaires in hollow ceilings and -walls			3,36
Occhio air module Bluetooth 4.0 dim module for phase-cut dimmable spotlights and power supply units, mounting in cavity or switch box, max. 4 x 32 W (with Occhio converter, other converters max. 52 W), L 40 mm x W 36 mm x H 14 mm			82,35
Occhio air adapter for lui volto/alto v adapter ring incl. »air« module, mounting under luminaire, ø 95 mm, H 10 mm for lui 3d adapter ring incl. »air« module, mounting under luminaire, ø 88 mm, H 14 mm	 	matt white matt black matt white matt black	110,92 110,92
color filter for zoom optic	filter red filter green filter blue filter yellow filter magenta		30,25

Can be configured at **Occhio Digital Order System (DOS)**

lui spotlights mounting options

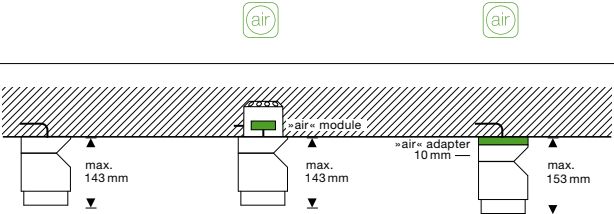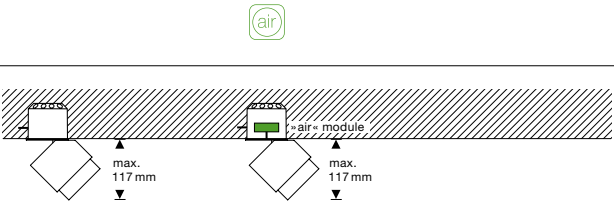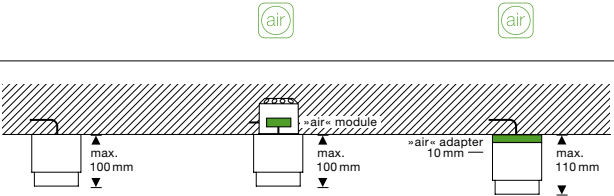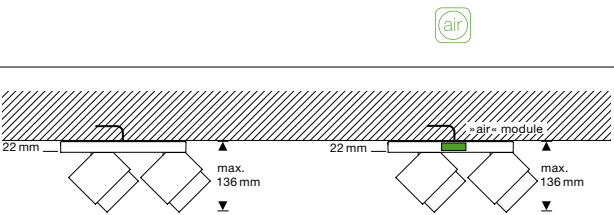volto head ø 94 mm, H 143 mm (zoom), H 131 mm (lens)   90° swivel range 360° rotatable	solid wall with 230 V power supply, through-wiring possible 
alto head ø 94 mm, H 117 mm (zoom), H 105 mm (lens)   45° swivel range 360° rotatable	solid wall with 230 V power supply, through-wiring possible 
alto v ø 94 mm, H 100 mm (zoom), H 82 mm (lens)   non rotatable	solid wall with 230 V power supply, through-wiring possible 
alto doppio head ø 94 mm, H 136 mm (zoom), H 125 mm (lens) base L 240 mm x W 85 mm x H 22 mm   45° swivel range 360° rotatable	solid wall with 230 V power supply, through-wiring possible 
alto track head ø 94 mm, H 118 mm (zoom), H 108 mm (lens)   55° swivel range 360° rotatable	in-trac adapter for Onetrack by Eutrac or Stucchi 


lui spotlights piano mounting options

piano edge
head ø 94 mm, H 99 mm (zoom), H 85 mm (lens)




 optional with Occhio air


edge mounting tube

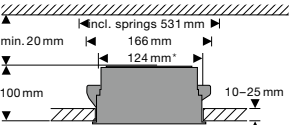

hollow ceiling



concrete ceiling
(Kaiser HaloX 250 with mineral-fibre board)
power supply max. L 210 mm x H 30 mm




ceiling edge

piano v edge
head ø 94 mm, H 99 mm (zoom), H 85 mm (lens)




 optional with Occhio air


edge mounting tube

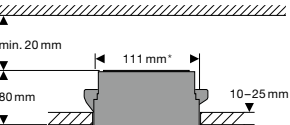

hollow ceiling




concrete ceiling
(Kaiser HaloX 180 with mineral-fibre board)
power supply max. L 130 mm x H 30 mm




ceiling edge

piano cover
head ø 94 mm, H 99 mm (zoom), H 85 mm (lens)

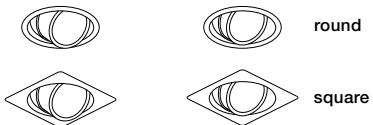


 optional with Occhio air


mounting tube with cover

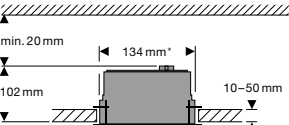

hollow ceiling



concrete ceiling
(Kaiser HaloX 250 with mineral-fibre board)
power supply max. L 210 mm x H 30 mm



cover


piano v cover
head ø 94 mm, H 99 mm (zoom), H 85 mm (lens)




non rotatable

 optional with Occhio air


mounting tube with cover

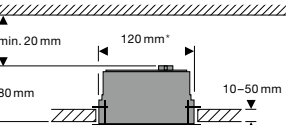

hollow ceiling

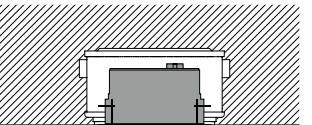


concrete ceiling
(Kaiser HaloX 180 with mineral-fibre board)
power supply max. L 130 mm x H 30 mm



cover


piano pure
head ø 94 mm, H 99 mm (zoom), H 85 mm (lens)

as pro version (»constant current«)
remote power supply (optional)

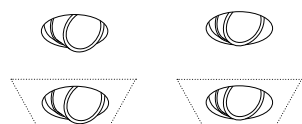


 optional with Occhio air

mounting board for seamless mounting

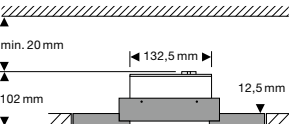


hollow ceiling
(fibre cement board with holding ring)

flush-mount ring for seamless




concrete ceiling plastered, no fair-faced concrete
(Kaiser HaloX 250 with mineral-fibre board)
power supply max. L 210 mm x H 30 mm



piano v pure
head ø 94 mm, H 99 mm (zoom), H 85 mm (lens)


as pro version (»constant current«)
remote power supply (optional)




non swivable

 optional with Occhio air

mounting board for seamless mounting

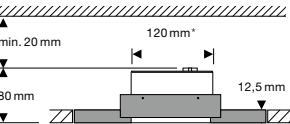

hollow ceiling
(fibre cement board with holding ring)



* cut-out dimension

lui spotlights lighting effects

head	zoom	lens
	continuously adjustable light cone	fixed light cone with insight lens (changeable)
 zoom	zoom 20°–60° soft edge glass + zoom optic	
contour		
 C 80		80°/clear glass + small lens medium + lens optic
 C 60		60°/clear glass + small lens high + lens optic
soft		
 S 80		80°/soft edge glass + small lens medium + lens optic
 S 60		60°/soft edge glass + small lens high + lens optic
 S 40		40°/Fresnel-lens + small lens medium + lens optic
 S 30		30°/Fresnel-lens + small lens high + lens optic

lui spotlights with these lighting effects are configurable at **Occhio Digital Order System (DOS)**

lui spotlights technical data and control



Occhio VOLT light engine

connection	U	230 V AC/50 Hz
average service life	t	> 40.000 h
energy-efficiency class	EEK	G

LED		perfect color
color temperature	T	2700 K, 3000 K
Color Rendering Index	CRI	Ra 97
recommended use		residential and public

power luminous flux luminaire		P ϕ	perfect color	
			13W	18W
zoom			420lm	560lm
lens	C 80		530lm	720lm
	C 60		530lm	720lm
	S 80		530lm	720lm
	S 60		530lm	720lm
	S 40		450lm	600lm
	S 30		470lm	630lm

control

Occhio air
powered by
Casambi

lui spotlights **VOLT Leuchten** are dimmable via trailing-edge phase cut dimmer*.



Occhio air

control via Bluetooth – switching, dimming of individual luminaires, groups and scenes.

*compatible dimmers: occhio.com/dim

lui 3d

floor spotlights



zoom continuously adjustable light cone

basso

head and body 360° rotatable
incl. plug-in power supply

14 cm

version			
	18 W (890 lm) 13 W (650 lm)	chrome/colors shiny chrome	603,36
	18 W (890 lm)	materials	+ 16,81
	18 W (890 lm)	phantom/black phantom	+ 25,21

zoom
20°–60°/soft edge glass
+ zoom optic



lens fixed light cone

basso

head and body 360° rotatable
incl. plug-in power supply

14 cm

version			
	18 W (1100 lm) 13 W (740 lm)	chrome/colors shiny chrome	584,87
	18 W (1100 lm)	materials	+ 16,81
	18 W (1100 lm)	phantom/black phantom	+ 25,21

C 80
80°/clear glass + small lens medium
+ lens optic

	18 W (1100 lm) 13 W (740 lm)	chrome/colors shiny chrome	584,87
	18 W (1100 lm)	materials	+ 16,81
	18 W (1100 lm)	phantom/black phantom	+ 25,21

S 80
80°/soft edge glass + small lens medium
+ lens optic

	18 W (910 lm) 13 W (660 lm)	chrome/colors shiny chrome	584,87
	18 W (910 lm)	materials	+ 16,81
	18 W (910 lm)	phantom/black phantom	+ 25,21

S 40
40°/Fresnel lens + small lens medium
+ lens optic

control	
features	
switchable and dimmable at the head via rear slide control	

inserts		
	 filter red	30,25
	 filter green	
	 filter blue	
	 filter yellow	
	 filter magenta	
(for zoom optics)		

options	
light source	
2700 K or 3000 K, perfect color CRI 97	

surfaces		head/optics/body/base		colors		materials/phantom/black phantom		
chrome								
shiny chrome		matt white				matt black/rose gold/matt black		
matt chrome		matt black				matt black/bronze/matt black		
		matt white/matt gold/matt white				matt black/phantom/matt black		
		matt black/matt gold/matt black				matt black/black phantom/matt black		
The surfaces rose gold, bronze, phantom and black phantom may differ slightly from other product lines.								

further options - further lighting effects view page 232

These and further options can be configured at
Occhio Digital Order System (DOS)

further information - technical data view page 233

lui 3d

wall and ceiling luminaires



zoom continuously adjustable light cone

pico

head and body 360° rotatable

up/flat

version

	18 W (890 lm) 13 W (650 lm)	chrome/colors shiny chrome	576,47
	18 W (890 lm)	materials	+ 16,81
	18 W (890 lm)	phantom/black phantom	+ 25,21

zoom
20°–60°/soft edge glass
+ zoom optic

can also be configured as pro version and pro power version with 26 W excl. power supply at Digital Order System (DOS)

control

features

switchable and dimmable
at the head via rear slide control,
alternatively dimmable via
trailing-edge phase cut dimmer

Occhio air module



Bluetooth dimming module, for
mounting in hollow ceiling or
switch box, for max. 4 spotlights

82,35

Occhio air adapter



adapter ring incl. »air« module,
mounting under luminaire

110,92

inserts

- filter red
- filter green
- filter blue
- filter yellow
- filter magenta

30,25

(for zoom optics)

can also be configured as pro version and pro power version with 26 W excl. power supply at Digital Order System (DOS)

surfaces

head/optics/body/base
chrome

shiny chrome
matt chrome



colors

matt white
matt black
matt white/matt gold/matt white
matt black/matt gold/matt black



materials/phantom/black phantom

matt black/rose gold/matt black
matt black/bronze/matt black
matt black/phantom/matt black
matt black/black phantom/matt black



The surfaces rose gold, bronze, phantom and black phantom may differ slightly from other product lines.

further options

- further lighting effects view page 232
- further mounting accessories view page 230
- further accessories for Occhio air from page 260

These and further options can be configured at
Occhio Digital Order System (DOS)

further information


- technical data and information on mounting options view pages 231–233

lui 3d mounting accessories

sideways inlet (single- or double-sided) for all surface-mounted versions, H 7 mm, ø 76 mm (ø base 88 mm)		matt white	28,57
canopy with outlet on one or both sides for all surface-mounted versions, H 15 mm, ø 88 mm		shiny chrome glossy white matt chrome matt white matt black	55,46
mirror assembly kit for mounting the luminaires io pico directly on a mirror, (drilling diameter 70 mm) no possibility of revision of the power supply via mirrors			43,70
cavity box for mounting of flat luminaires in hollow ceilings and -walls			3,36
Occhio air module Bluetooth 4.0 dim module for phase-cut dimmable spotlights and power supply units, mounting in cavity or switch box, max. 4 x 32 W (with Occhio converter, other converters max. 52 W), L 40 mm x W 36 mm x H 14 mm			82,35
Occhio air adapter for lui volto/alto v adapter ring incl. »air« module, mounting under luminaire, ø 95 mm, H 10 mm		matt white matt black	110,92
for lui 3d adapter ring incl. »air« module, mounting under luminaire, ø 88 mm, H 14 mm		matt white matt black	110,92
color filter for zoom optic	filter red filter green filter blue filter yellow filter magenta		30,25


lui 3d mounting options

pico up
with integrated power supply for surface
mounting, suitable for wall mounting
(outside the hand area),
through-wiring possible

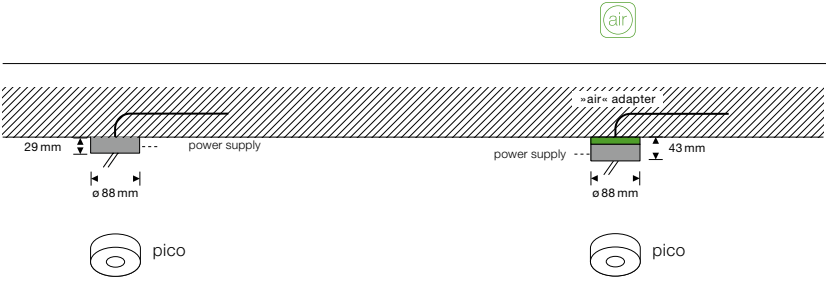

The diagram shows two wall mounting options for the 'pico up' luminaire. On the left, the luminaire is mounted directly to the wall with a power supply unit integrated into its base. Dimensions include a 29 mm height and an 88 mm diameter base. On the right, the luminaire is mounted via an '»air« adapter' to a wall. The adapter is connected to a power supply unit. Dimensions include a 43 mm height and an 88 mm diameter base. Below each diagram is a circular icon labeled 'pico'.

pico flat
with flat base for cavity box,
remote power supply
suitable for wall mounting
(outside the hand area),
through-wiring possible

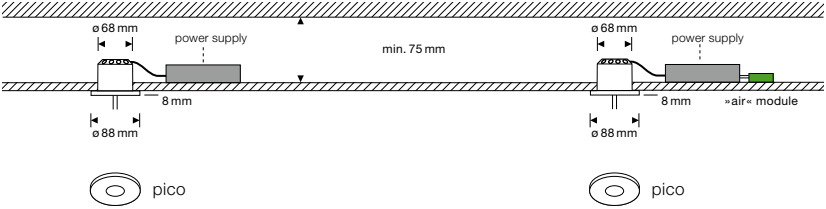

The diagram shows two wall mounting options for the 'pico flat' luminaire. On the left, the luminaire is mounted to a wall with a remote power supply unit connected by a cable. Dimensions include an 8 mm cable length and an 88 mm diameter base. On the right, the luminaire is mounted via an '»air« module' to a wall. The module is connected to a power supply unit. Dimensions include an 8 mm cable length, an 88 mm diameter base, and a minimum 75 mm distance between the luminaire and the module. Below each diagram is a circular icon labeled 'pico'.

lui 3d lighting effects

head	zoom	lens
	continuously adjustable light cone	fixed light cone with insight lens (changeable)
 zoom	zoom 20°–60° soft edge glass + zoom optic	
contour		
 C 80		80°/clear glass + small lens medium + lens optic
 C 60		60°/clear glass + small lens high + lens optic
soft		
 S 80		80°/soft edge glass + small lens medium + lens optic
 S 60		60°/soft edge glass + small lens high + lens optic
 S 40		40°/Fresnel-lens + small lens medium + lens optic
 S 30		30°/Fresnel-lens + small lens high + lens optic

lui 3d spotlights with these lighting effects are configurable at **Occhio Digital Order System (DOS)**

lui 3d technical data and control

version »slide control«	connection	U	48 V DC (min. 22 W)	
	average service life	t	> 50.000 h	
	energy-efficiency class	EEK	G	
LED			perfect color	
color temperature		T	2700 K, 3000 K	
Color Rendering Index		CRI	Ra 97	
recommended use			residential and public	
power			perfect color	
luminous flux luminaire		P	13 W	18 W
zoom		φ	650 lm	890 lm
lens	C 80		740 lm	1010 lm
	C 60		770 lm	1040 lm
	S 80		740 lm	1010 lm
	S 60		740 lm	1010 lm
	S 40		660 lm	910 lm
	S 30		690 lm	940 lm


control

with Occhio power supply
The Occhio power supply is perfectly matched to these requirements and can be dimmed by trailing-edge phase cut dimmer*. Not in connection with dimming function or slight control or Occhio air.

*Occhio air
powered by
Casambi*

 **Occhio air**
control via Bluetooth – switching, dimming of individual luminaires, groups and scenes.

dim function lui luminaire heads




lui 3d luminaires are switchable and dimmable at the head via rear slight control.
For external dimming or for use with Occhio air, set the slight control to »100«.

*compatible dimmers: occhio.com/dim

M series

lei

The first shade luminaire with changeable characteristics.

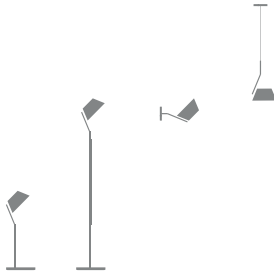


lei 3d

table and floor luminaires



tavolo

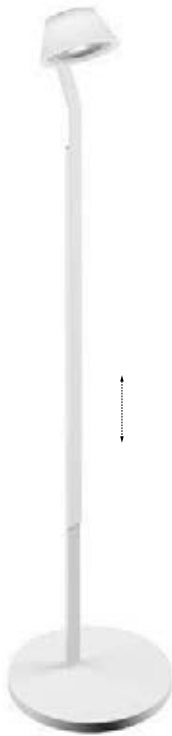

lettura

head and body 360° rotatable
incl. plug-in power supply

40 cm

120–150 cm
height adjustable

version



9 W (610 lm)

colors

630,25

materials

+ 16,81

phantom

+ 26,89

1.089,08

+ 16,81

+ 26,89

iris for flexible setting of direct and
ambient light proportions

control

features

switchable and dimmable via sensor button
on the rear side of the head

options

light source

2700 K or 3000 K, perfect color CRI97

surfaces

iris + cover/body/base

chrome

shiny chrome
matt chrome
glossy white/shiny chrome/glossy white



colors

matt white
matt black
matt gold/matt white
matt gold/matt black



materials/phantom/black phantom

rose gold/matt black
bronze/matt black
phantom/matt black
black phantom/black matt



head matt white/translucent
The surfaces rose gold, bronze, phantom and black phantom may differ slightly from other product lines.

further information

- technical data view page 242

lei 3d

wall and suspended luminaires





parete				sospeso			
head and body 360° rotatable		15 cm, up/flat		head and body 360° rotatable	fix, up/flat cable length adjustable during mounting, 80–180 cm	variable, up/flat continous height adjustment 50–200 cm	
version							
	9 W (610 lm)	colors	532,77		623,53	892,44	
		materials	+ 16,81		+ 16,81		
		phantom	+ 26,89		+ 26,89		
iris for flexible setting of direct and ambient light proportions					⦿ special length up to 1000 cm possible (extra charge per head: + 142,86, non discountable) longer version, fix (180–280 cm) configurable (with surcharge)		
control	features switchable and dimmable via sensor button on the rear side of the head (can be deactivated), alternatively dimmable via trailing-edge phase cut dimmer	Occhio air module  Bluetooth dimmer module, mounting in hollow ceiling or switch box, for max. 4 spotlights 82,35	Occhio air adapter  adapter ring incl. »air« module, mounting under surface-mounted spacing box 110,92				
options	light source 2700 K or 3000 K, perfect color CRI 97	mounting variations up  with integrated converter for surface mounting, through-wiring possible	flat  with flat base for hollow ceiling with hollow ceiling box incl. remote converter	surfaces	iris + cover/body/base chrome shiny chrome matt chrome glossy white/shiny chrome/glossy white 	colors matt white matt black matt gold/matt white matt gold/matt black 	materials/phantom/black phantom rose gold/matt black bronze/matt black phantom/matt black black phantom/black matt 
head matt white/translucent The surfaces rose gold, bronze, phantom and black phantom may differ slightly from other product lines.							
further options	- further mounting accessories view page 240 - further accessories for Occhio air from page 260	These and further options can be configured at Occhio Digital Order System (DOS)		further information	- technical data, information on control and mounting options view pages 241–242		

lei/lei 3d mounting accessories

sideways inlet (single- or double-sided) for all surface-mounted versions, H 7 mm, ø 76 mm (ø base 88 mm)		matt white	28,57
canopy with outlet on one or both sides for all surface-mounted versions, H 15 mm, ø 88 mm		chrome glossy white matt chrome matt white matt black	55,46
cable redirection for sospeso H 18 mm, ø 15 mm		chrome matt chrome matt white matt black	35,29
cavity box for mounting of flat luminaires in hollow ceilings and -walls			3,36
Occhio air module Bluetooth 4.0 dim module for phase-cut dimmable luminaires and power supplies, mounting in cavity or switch box, max. 4 x 32 W (with Occhio converter, other converters max. 52 W), L 40 mm x W 36 mm x H 14 mm			82,35
Occhio air adapter adapter ring incl. »air« module for all surface-mounted versions, mounting under luminaire, ø 88 mm, H 14 mm		matt white matt black	110,92

lei 3d mounting options

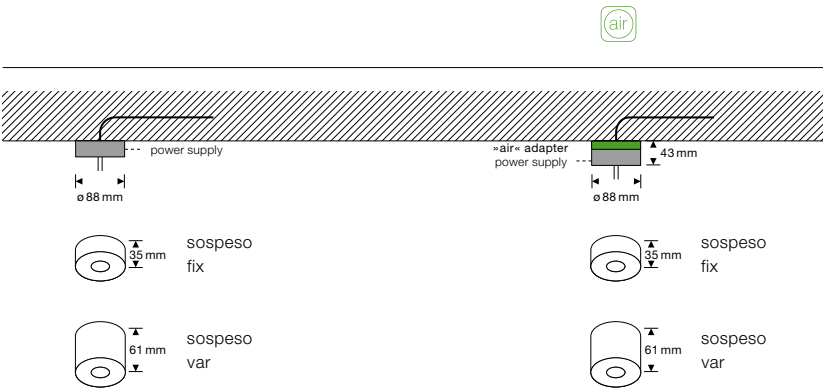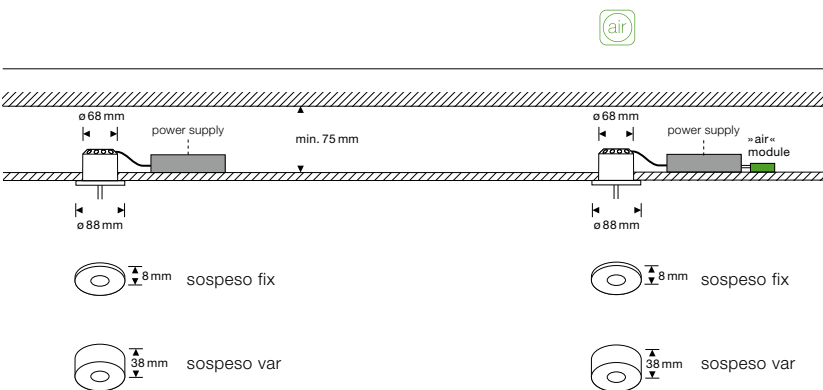up with integrated power supply for surface mounting, through-wiring possible	
flat with flat base for cavity box, remote power supply	

lei 3d technical data and control

version »touch control«	connection average service life energy efficiency class U t EEK 230 V AC > 50.000 h G		
	LED color temperature Color Rendering Index recommended use T CRI perfect color 2700 K, 3000 K, 4000 K Ra 97 residential and public		
	power luminous flux luminaire P φ perfect color 9 W		
	iris		610 lm
control	with Occhio power supply The Occhio power supply is perfectly matched to these requirements and can be dimmed by trailing-edge phase cut dimmer*. Can not be used in conjunktion with »touchless control« or Occhio air.		
	Occhio air powered by Casambi air Occhio air control via Bluetooth – switching, dimming of individual luminaires, groups and scenes.		
dimming lei heads	SENSOR OFF luminaires are dimmed using remote trailing-edge phas cut dimmers* (except for floor and table luminaires) or controlled with Occhio air (optional) (switching, dimming).		
	SENSOR ON luminaires can be controlled by sensor button on head (switching, dimming) – cannot be combined with Occhio air.		

sensor


on ☐ off

* compatible dimmers: occhio.com/dim

E series




Sito

Spherical and sensual, Sito adds high-quality accents. Whether on the building itself, on terraces, on paths or in the garden: Sito offers unique design and quality of light for holistic lighting concepts in outdoor spaces.

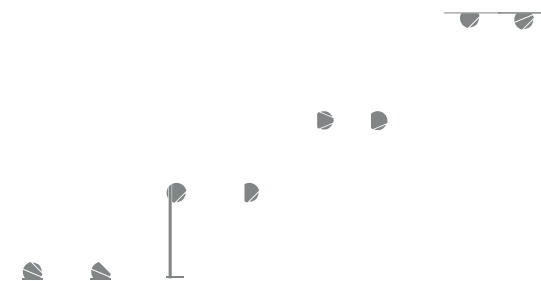


Sito

bollard and floor luminaires

					
basso		R basso			palo
with spherical glass light output 90°–45°	360° rotatable pivotable	with flat glass	360° rotatable pivotable	light output 45°	65 cm head 45° swivelable
versions			versions		
 18 W (1100 lm)	830,25		 18 W (1100 lm)	922,69	
C 80 80°			C 80 80°		
 18 W (980 lm)	845,38		 18 W (980 lm)	937,82	
S 80 80° soft edge			S 80 80° soft edge		
 18 W (870 lm)	853,78		 18 W (870 lm)	946,22	
S 40 40° Fresnel lens			S 40 40° Fresnel lens		
control	features		Occhio air module 		 dust-tight and jet-proof (IP 65)
	 230 V light engine 18 W dimnable via trailing-edge phase cut dimmer		Bluetooth trailing-edge phase cut dimmer for up to 4 luminaires to be installed in a suitable place in a water-protected housing (plastic) 82,35		
options	lightsource	earth anchor	earth spike	surfaces	head/body + base colors
	2700 K or 3000 K , perfect color CRI97	 for potting in concrete	 mounting in loose ground (only Sito basso)		matt white matt black glossy white / matt white 
		60,50	31,93		
further options	- further mounting accessories view page 252		These and further options can be configured at Occhio Digital Order System (DOS)		further information
					- technical data, information on control and mounting options view pages 254–256

Sito
wall luminaires



verticale

vertical light output

versions

2 × 9 W (1100 lm)
838,66

C 80
80°

2 × 9 W (980 lm)
853,78

S 80
80°
soft edge

control

features

230 V light engine 18 W
dimmable via trailing-edge phase cut dimmer

Occhio air module

Bluetooth trailing-edge phase cut dimmer for up to 4 luminaires
to be installed in a suitable place in a water-protected housing (plastic)
82,35

options

lightsource

2700 K or 3000 K , perfect color CRI97



giù

vertical light output

versions

9 W (550 lm)
652,10

C 80
80°

9 W (490 lm)
667,23

S 80
80°
soft edge

dust-tight and jet-proof
(IP 65)

surfaces

head
colors


- matt white
- matt black
- glossy white



further information

- technical data, information on control
and mounting options view pages 254–256

Sito
ceiling and wall luminaires

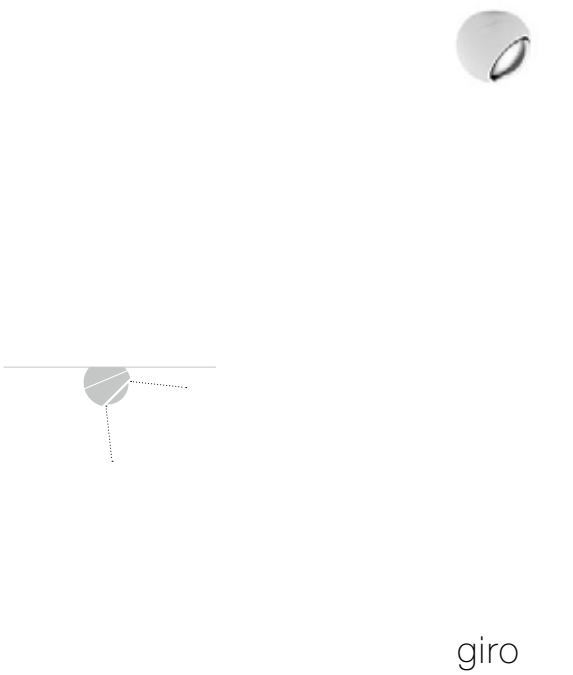


giro

light output 90°–45°
360° rotatable
45° pivotable

versions		
	18 W (1100 lm)	744,54
C 80 80°		
	18 W (980 lm)	759,66
S 80 80° soft edge		
	18 W (870 lm)	768,07
S 40 40° Fresnel lens		

control	features	Occhio air module 
	 230 V light engine 18 W dimnable via trailing-edge phase cut dimmer	Bluetooth trailing-edge phase cut dimmer for up to 4 luminaires to be installed in a suitable place in a water-protected housing (plastic) 82,35

options	lightsource
	2700 K or 3000 K, perfect color CRI 97

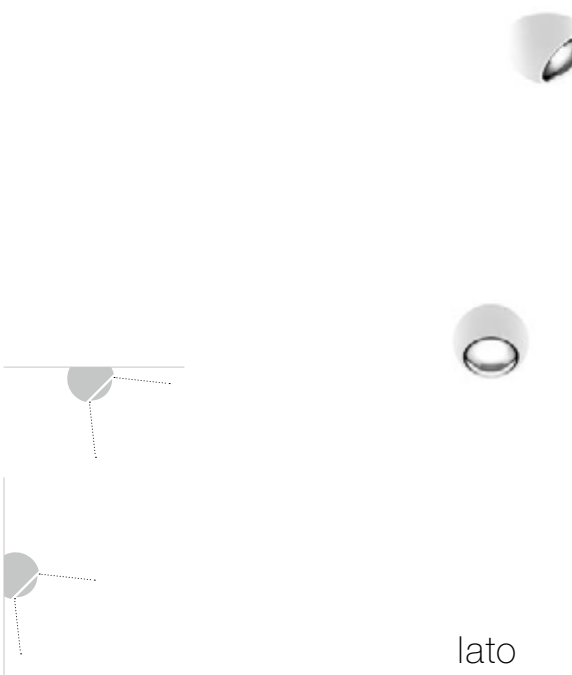

lato

light output 45°


versions		
	18 W (1100 lm)	652,10
C 80 80°		
	18 W (980 lm)	667,23
S 80 80° soft edge		
	18 W (870 lm)	675,63
S 40 40° Fresnel lens		

 dust-tight and jet-proof (IP 65)
--

surfaces	head colors
	matt white  matt black  glossy white 

further information	- technical data, information on control and mounting options view pages 254–256
---------------------	---

Sito mounting options

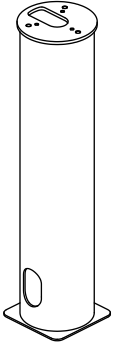ground anchor for potting in concrete, Sito palo and Sito basso height: 400 mm diameter: 95 mm		60,50
earth spike mounting in loose ground (e. g. earth, gravel), Sito basso height: 267 mm diameter: 60 mm		31,93

Can be configured at **Occhio Digital Order System (DOS)**

Sito mounting options

basso
head: ø 130 mm, H 124 mm




45° swivel range
360° rotatable




Occhio air module optional


solid floor with 230 V
connection

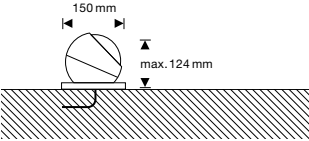

optional: ground
anchor
for potting in concrete

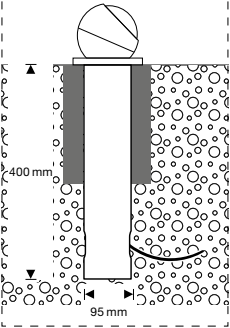

optional: earth spike
mounting in loose
ground

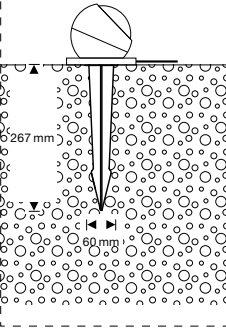

palo
head: ø 130 mm, H 650 mm




head je 45° rotatable




Occhio air module optional

solid floor with 230 V
connection

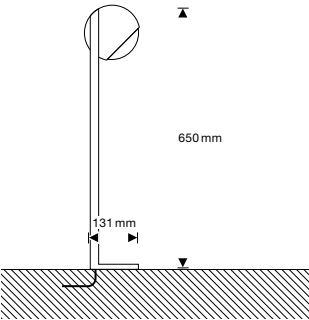

optional: ground
anchor
for potting in concrete

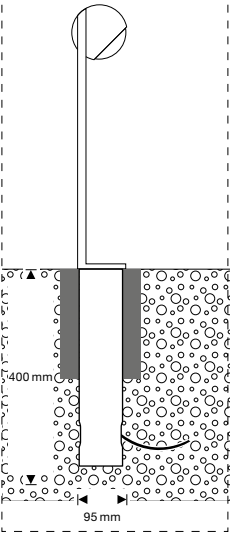


verticale
head: ø 130 mm, L 113 mm



Occhio air module optional

solid wall with 230 V
connection

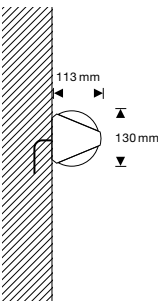


giù
head: ø 130 mm, L 113 mm



Occhio air module optional

solid wall with 230 V
connection

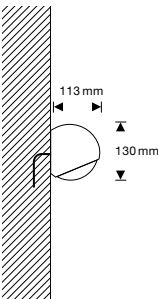

giro
head: ø 130 mm, L 110 mm




45° swivel range
360° rotatable



Occhio air module optional

solid ceiling with 230 V
connection

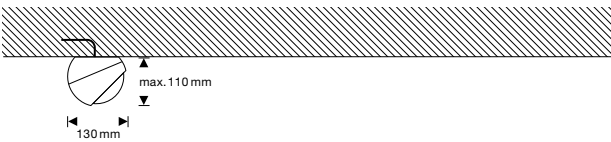


lato
head: ø 130 mm, L 99 mm



Occhio air module optional

solid wall with 230 V
connection

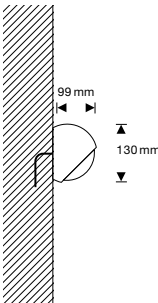

Sito technical data and control



Occhio VOLT light engine

connection	U	230 V AC/50 Hz
average service life	t	> 40.000 h
energy efficiency class	EEK	G
safety class		IP 65 (dust-tight and jet proof)

LED		
color temperature	T	2700 K, 3000 K
Color Rendering Index	CRI	Ra 97
recommended use		outdoor area for living and object

		perfect color		
		9 W	2 x 9 W	18 W
power				
luminous flux luminaire	φ			
Sito verticale	C 80		1100 lm	
	S 80		980 lm	
gio	C 80	550 lm		
	S 80	490 lm		
lato, giro, basso, palo	C 80			1100 lm
	S 80			980 lm
	S 40			870 lm

control

Sito luminaires can be dimmed via trailing-edge phase cut*.
List of compatible dimmer see below occhio.com/dim.

 **Occhio air**

control via Bluetooth – switching, dimming of individual luminaires, groups and scenes.

Occhio air
powered by
Casambi

* compatible dimmers: occhio.com/dim



Occhio air

The new simplicity of staging. Whether switching, dimming, »fading« or creating complete light scenarios and group luminaires – with Occhio air light can now be controlled via Bluetooth.



Occhio air

Occhio air controller			
for all luminaires Bluetooth 4.0. remote control for Occhio air, set up via the Occhio air app. L 80 mm x W 80 mm x H 12 mm			
	matt white/glossy white matt black/glossy black matt white/matt chrome matt black/matt chrome		208,40
wall mount for Occhio air controller			
for all luminaires mounting via self-adhesive tape, screws or installed on wall box			
	matt white matt black		26,89
Occhio air app			
for all luminaires app for operating Occhio air, requires iOS 8.2, Android 4.4 or later, available in the App Store or Google Play Store			
			free of charge

Mito »air« box			
for Mito/Mito linear Bluetooth control integrated into cover/canopy, features controllable via Occhio air app or »air« controller (optional), no external dimming			
		surcharge	82,35
for Mito sospeso due			
		surcharge	164,71
Sento »air« head			
for Sento/Sento sospeso Bluetooth control integrated into the luminaire head, features controllable via Occhio air app or »air« controller (optional), no external dimming			
		surcharge	82,35
Occhio air module			
for Più, io spotlights, io 3d, lui spotlights, lui 3d, lei 3d Bluetooth 4.0 dimming module for phase-cut dimmable spotlights and ballasts, mounting in cavity box or wall switch box max. 4 x 32 W L 40 mm x W 36 mm x H 14 mm			
			82,35
Occhio air adapter			
for Più alto 3d, io 3d, lui 3d, lei 3d adapter ring incl. »air« module, mounting under surface-mounted spacing box ø 88 mm, H 14 mm			
	matt white matt black		110,92
for Più alto adapter ring incl. »air« module, mounting under surface-mounted spacing box ø 83 mm, H 14 mm			
	matt white matt black		110,92
for Più alto v adapter ring incl. »air« module, mounting under surface-mounted spacing box ø 83 mm, H 14 mm			
	matt white matt black		110,92
for lui volto, lui alto v adapter ring incl. »air« module, mounting under surface-mounted spacing box ø 95 mm, H 10 mm			
	matt white matt black		110,92
for io verticale adapter ring incl. »air« module, mounting under luminaire, ø 82 mm, H 14 mm			
	matt white matt black		110,92
for io giro, io alto v adapter ring incl. »air« module, mounting under luminaire, ø 77 mm, H 10 mm			
	matt white matt black		110,92
for io giro doppio adapter ring incl. »air« module, mounting under luminaire, L 196 mm x W 51 mm x H 7 mm			
	matt white matt black		110,92

Occhio

Occhio GmbH
Wiener Platz 7
81667 München
Germany
Fon +49-89-44 77 86 80
Fax +49-89-44 77 86 39
info@occhio.com

occhio.com

price overview
English (Euro excl. VAT)
2025|09

Subject to errors and technical change.
All prices are recommended retail
prices by Occhio GmbH.
Product overview valid until further notice.