

Sento faro singolo low voltage halogen

Ceiling luminaire - modular system consisting of body and head


Thanks to its unique modularity the Occhio head-body system delivers impressive lighting solutions for your room. For different lighting effects diverse, turnable reflector heads are available, which can be easily substituted at any time thanks to a simple plug-in mechanism. The diverse wall and ceiling boxes allow for all recessed and surface mounting options.

Ceiling luminaire Occhio Sento faro singolo consisting of

- body Occhio faro singolo - different length and surfaces
- head Occhio Sento - different lighting effects and surfaces
- Occhio accessories - different mounting options and surfaces



Sento faro singolo C

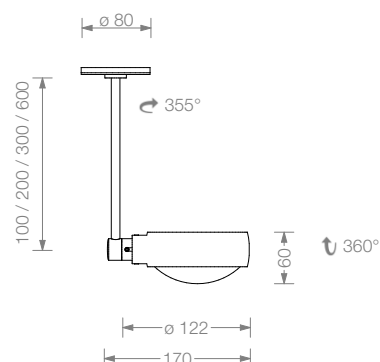

Sento faro singolo E

material
aluminium, brass, steel, glass

surface
head: see p.2 cutsheet
body: chrome, matt chrome

length / rotation angle
10 cm, 20 cm, 30 cm, 60 cm / 355°

recommended lighting effects
B, C, E see p.2 cutsheet

light source
low voltage halogen, operating voltage 12 V
max. 60 W IRC, GY6.35,
energy efficiency grade B, lifetime 4.000 h

luminous flux (bulb)
35 W / 860lm, 50 W / 1180lm, 60 W / 1650lm

color temperature / color rendering
3000 K / CRI 100

weight
body + head max. 1,5kg



mounting accessories
for surface or recessed mounting, see p.3 cutsheet

cutsheet

Occhio

2|3

Sento faro singolo recommended lighting effects

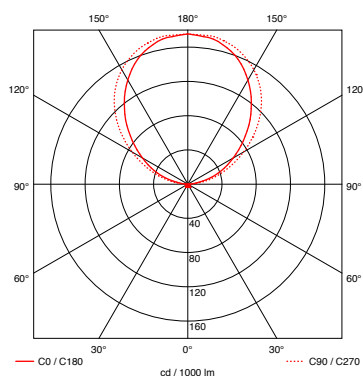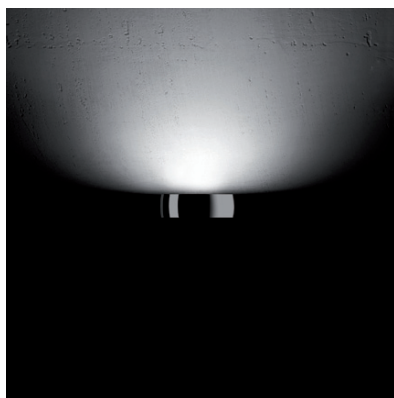

Sento B (satinised glass / cover)
reflector head for diffuse light
in one direction

luminous efficiency

49%

glass



satinised, heat-resistant glass

ring / cover

chrome, matt chrome
white or black glossy finished
(bianco, nero)

holder

chrome or matt chrome

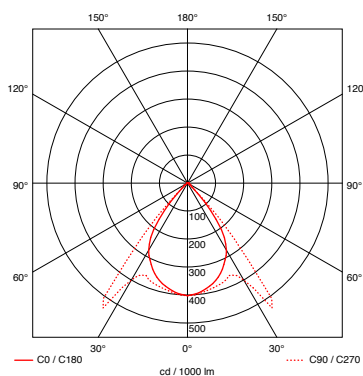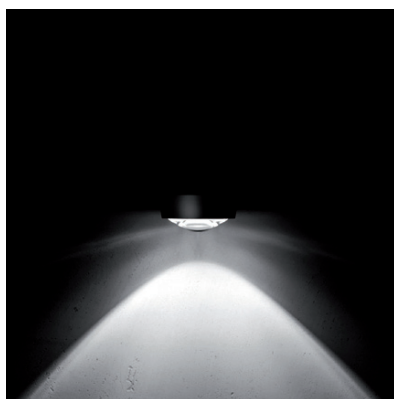

Sento C (cover / lense)
reflector head for directed light
in one direction

luminous efficiency

56%

beam angle

approx. 85°

lense


optical glass

ring / cover

chrome, matt chrome,
white or black glossy finished
(bianco, nero)

holder

chrome or matt chrome

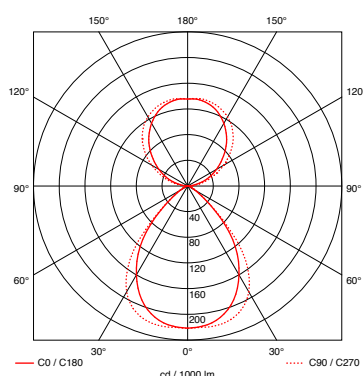

Sento E (satinised glass / lense)
reflector head for diffuse light in one and
directed light in the other direction

luminous efficiency

82%

beam angle

approx. 85°

glass

satinised, heat-resistant glass

lense

optical glass

ring

chrome, matt chrome,
white or black glossy finished
(bianco, nero)

holder

chrome or matt chrome

cutsheet


Occhio

3 | 3

Sento faro singolo Item numbers

Item number
_matt chrome M
_chrome C

faro singolo



max. 60 W
low voltage halogen, GY6.35
turnable

10 cm	7F 10 00 _
20 cm	7F 11 00 _
30 cm	7F 12 00 _
60 cm	7F 14 00 _




Sento B



satinised glass / lens

matt chrome	8K 00 72 M
chrome	8K 00 72 C
bianco	8K 00 72 B
nero	8K 00 72 N


Sento C



cover / lens

matt chrome	7K 00 63 M
chrome	7K 00 63 C
bianco	7K 00 63 B
nero	7K 00 63 N

Sento E




satinised glass / cover

matt chrome	7K 00 75 M
chrome	7K 00 75 C
bianco	7K 00 75 B
nero	7K 00 75 N



mounting transformer on site


flat box



for plastering or wall / ceiling box
h 8 mm, ø 80 mm

8Z 00 00 M
8Z 00 00 C

Electronic transformer max. 150 W



for mounting in cavity walls / ceilings,
trailing- or leading-edge dimmable,
50 – 150 W,
l 153 mm, w 54 mm, h 36 mm

7Z 00 03 T

Electronic transformer max. 105 W



for mounting in cavity walls / ceilings,
trailing- or leading-edge dimmable,
35 – 105 W,
l 107 mm, w 52 mm, h 30 mm

7Z 00 01 T

Electronic transformer max. 70 W



for mounting in flush-mounted boxes (wall / ceiling), not for verticale on ceiling, not for plastering box ceiling, trailing- or leading-edge dimmable, 20 – 70 W, ø 53 mm, h 22 mm

7Z 00 02 T



transformer in surface mounted box

Box singolo



mounting version
incl. electronic transformer
35 – 75 W
176 mm, w 88 mm, h 28 mm

matt chrome	7Z 40 10 M	F
chrome	7Z 40 10 C	F
bianco / chrome	7Z 40 10 B	F
nero / chrome	7Z 40 10 N	F



track version

matt chrome	4Z 40 10 M	F
chrome	4Z 40 10 C	F
bianco / chrome	4Z 40 10 B	F
nero / chrome	4Z 40 10 N	F